


FED. SUP. CLASS.  
5306

AN104201  
THRU  
AN104300

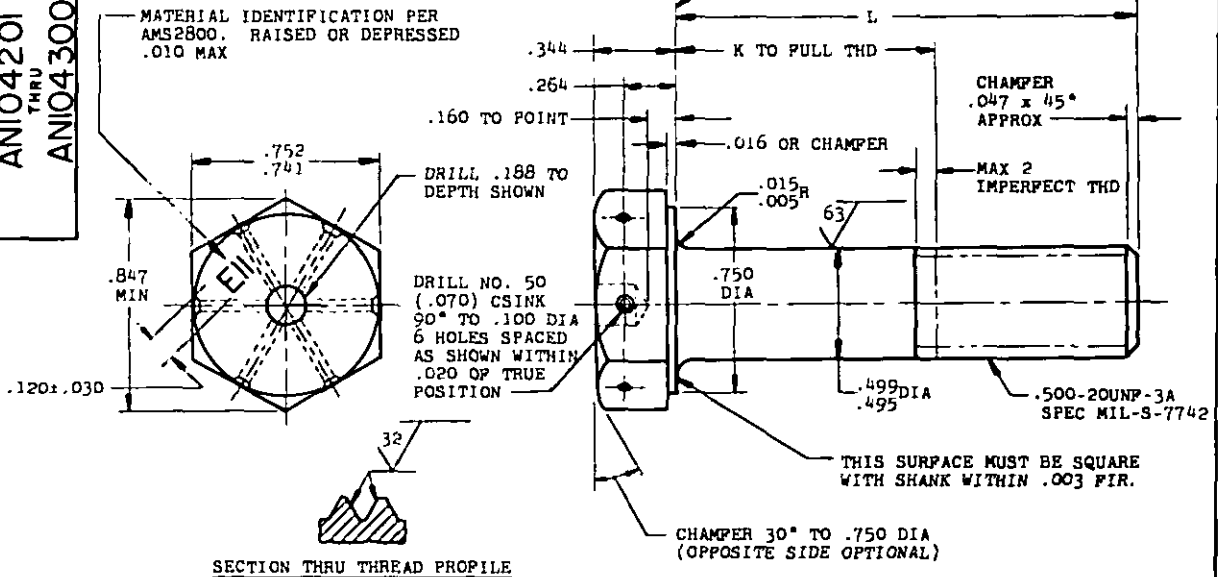

L	K +.000 -.060	PART NO.	L	K +.000 -.060	PART NO.	L	K +.000 -.060	PART NO.	L	K +.000 -.060	PART NO.
1.000	(a)	AN104206	1.812	.562	AN104219	3.125	1.875	AN104233	4.875	3.625	AN104247
1.062	(a)	AN104207	1.875	.625	AN104220	3.250	2.000	AN104234	5.000	3.750	AN104248
			1.938	.688	AN104221	3.375	2.125	AN104235	5.125	3.875	AN104249
1.125	(a)	AN104208	2.000	.750	AN104222	3.500	2.250	AN104236	5.250	4.000	AN104250
1.188	(a)	AN104209	2.062	.812	AN104223	3.625	2.375	AN104237	5.375	4.125	AN104251
1.250	(a)	AN104210	2.125	.875	AN104224	3.750	2.500	AN104238	5.500	4.250	AN104252
1.312	(a)	AN104211	2.188	.938	AN104225	3.875	2.625	AN104239	5.625	4.375	AN104253
1.375	(a)	AN104212	2.250	1.000	AN104226	4.000	2.750	AN104240	5.750	4.500	AN104254
1.438	.188	AN104213	2.375	1.125	AN104227	4.125	2.875	AN104241	5.875	4.625	AN104255
1.500	.250	AN104214	2.500	1.250	AN104228	4.250	3.000	AN104242	6.000	4.750	AN104256
1.562	.312	AN104215	2.625	1.375	AN104229	4.375	3.125	AN104243			
1.625	.375	AN104216	2.750	1.500	AN104230	4.500	3.250	AN104244			
1.688	.438	AN104217	2.875	1.625	AN104231	4.625	3.375	AN104245			
1.750	.500	AN104218	3.000	1.750	AN104232	4.750	3.500	AN104246			

(a) THREAD TO HEAD. MAXIMUM TWO IMPERFECT THREADS.

- NOTE: (1) SHANK SHALL BE STRAIGHT WITHIN .002 FIR. PER INCH OF BOLT LENGTH.  
(2) THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.  
(3) THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND HEXAGON SHALL BE WITHIN .023 FIR.

MATERIAL: STEEL AMS6322  
HARDNESS: ROCKWELL C26-32  
FINISH: CADMIUM PLATE AMS2400  
SURFACE ROUGHNESS: AS107  
MANUFACTURING SPECIFICATION: AMS7452

③ INSPECTION: ALL PARTS SHALL UNDERGO MAGNETIC INSPECTION IN ACCORDANCE WITH AMS2640

BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±2°.

DO NOT USE UNASSIGNED PART NUMBERS.

INACTIVE FOR NEW DESIGN AFTER 3 MARCH 1969 NO SUPERSEDING STANDARD.

THIS STANDARD WAS DEVELOPED COOPERATIVELY BY THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

P.A. AF-11  
CUST. NAVY-AS  
ARMY-AV

AIR FORCE-NAVY AERONAUTICAL STANDARD

BOLT - DRILLED HEX HEAD, 6 HOLES, .500-20

AN104201  
THRU  
AN104300

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

NOTE: This drawing was approved by the action of the Air Force and Navy Subcommittees to the Air Force-Naval Standard Committee. This drawing conforms to all dimensions and tolerances shown on the drawing and shall be used for the manufacture of components and assemblies. It is the responsibility of the designer to verify the dimensions and tolerances shown on this drawing with the latest data of component manufacturers.

APPROVED 8 June 49 REVISED 1 32 AUG 54 2 3 MAR 69 3 30 JUNE 86