
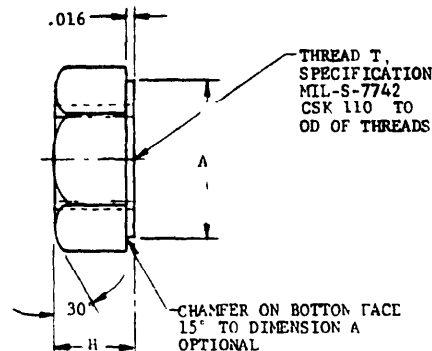




AN PART NO.	THREAD T	ULTIMATE TENSILE STRENGTH MINIMUM POUNDS		(a) A	B APPROX	H
		STEEL	AL ALLOY			
AN315-640	NO. 6-40UNF-3B	-	-	.313 ⁺ .002 -.010	23/64	7/64
AN315-3	NO. 10-32UNF-3B	2 210	1 100	.375 ⁺ .002 -.010	7/16	9/64
AN315-4	1/4 -28UNF-3B	4 080	2 030	.438 ⁺ .002 -.010	1/2	3/16
AN315-5	5/16 -24UNF-3B	6 500	3 220	.500 ⁺ .002 -.010	37/64	15/64
AN315-6	3/8 -24UNF-3B	10 100	5 020	.563 ⁺ .002 -.010	21/32	9/32
AN315-7	7/16 -20 UNF-3B	13 600	6 750	.625 ⁺ .002 -.011	23/32	21/64
AN315-8	1/2 -20UNF-3B	18 500	9 180	.750 ⁺ .002 -.012	7/8	3/8
AN315-9	9/16 -18UNF-3B	23 600	11 700	.875 ⁺ .002 -.012	1- 1/64	27/64
AN315-10	5/8 -18UNF-3B	30 100	14 900	1.000 ⁺ .002 -.012	1- 5/32	15/32
AN315-12	3/4 -16UNF-3B	44 000	21 800	1.125 ⁺ .002 -.016	1-19/64	5/8
AN315-14	7/8 -14UNF-3B	60 000	29 800	1.313 ⁺ .002 -.017	1-33/64	21/32
AN315-15	1 -12UNF-3B	80 700	40 000	1.500 ⁺ .002 -.019	1-47/64	3/4
(b) AN315-16	1 -14NF-3	80 700	40 000	1.500 ⁺ .002 -.019	1-47/64	3/4
AN315-18	1-1/8-12UNF-3B	101 800	50 500	1.688 ⁺ .002 -.021	1-61/64	13/16
AN315-20	1-1/4-12UNF-3B	130 200	64 400	1.875 ⁺ .002 -.023	2-11/64	7/8

- (a) FOR ALUMINUM-ALLOY NUTS LARGER THAN -5 SIZE, TOLERANCES ON DIMENSION "A" MAY CONFORM TO APPLICABLE MATERIAL SPECIFICATIONS FOR BAR AND ROD.
 (b) 1-14NF THREAD SIZE INACTIVE FOR DESIGN AFTER 27 MARCH 1967

10 MATERIAL STEEL, ALUMINUM-ALLOY, AND CORROSION-RESISTANT STEEL. SEE PROCUREMENT SPECIFICATION FINISH STEEL-CADMIUM PLATE IN ACCORDANCE WITH QQ-P-416, TYPE II, CLASS 2. PARTS WITH CLASS 3 PLATING MAY BE FURNISHED FROM SUPPLIER'S STOCK UNTIL 1 JANUARY 1975.

ALUMINUM-ALLOY-ANODIZE IN ACCORDANCE WITH MIL-A-8625, TYPE II.
 CORROSION RESISTANT STEEL-PASSIVATE IN ACCORDANCE WITH QQ-P-35.

ADD C BEFORE DASH NUMBER FOR CORROSION-RESISTANT STEEL NUTS.
 ADD D BEFORE DASH NUMBER FOR ALUMINUM-ALLOY NUTS.
 ADD R AFTER DASH NUMBER FOR RIGHT-HAND THREAD.
 ADD L AFTER DASH NUMBER FOR LEFT-HAND THREAD.

EXAMPLES OF PART NO. AN315-7L=STEEL NUT, 7/16-20UNF-3B, LEFT HAND THREAD.
 AN315D7R=ALUMINUM-ALLOY NUT, 7/16-20UNF-3B, RIGHT HAND THREAD.
 AN315C7R=CORROSION-RESISTANT STEEL NUT, 7/16-20UNF-3B, RIGHT-HAND THREAD.
 DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS $\pm 1/64$, DECIMALS $\pm .010$.
 ANGLES $\pm 1^\circ$

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
 REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID

PROCUREMENT
 SPECIFICATION
 FF-N-836

AIR FORCE-NAVY AERONAUTICAL STANDARD
 NUT, PLAIN, HEXAGON, AIRFRAME
 SUPERSEDES FORMER USAF AND NAVY STANDARD ISSUES OF AN315

AN315

SHEET 1 OF 1

APPROVED 8 JUL 43 REVISED 10 29 DEC 72

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government hereby incurs no responsibility, nor any obligation whatsoever, and it is further the Government incurs no liability in any way for the use of such data in any way other than as specifically authorized in writing by the Government. This notice is to be printed on all drawings, specifications, or other data so used.

NOTE: This drawing was prepared by joint action of the Air Force and Navy in accordance with the Air Force Navy agreement of 1943. This drawing is a joint product of the Air Force and Navy and is to be used for the procurement of parts with a length of 1 inch or less, in new designs only, later than 8 months after the date of approval of this drawing.

OMB Approval
No. 22-R255

DOCUMENT IDENTIFIER AND TITLE AN315 (10) NUT, PLAIN, HEXAGON, AIRFRAME

CONTRACT NUMBER

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

☐ YES ☐ NO (If "Yes", in what way?)

4 REMARKS

TELEPHONE NO

DATE _____

FOLD

DEPARTMENT OF THE NAVY
Naval Air Engineering Center
Philadelphia, PA 19112

OFFICIAL BUSINESS

POSTAGE AND FEES PAID
DEPARTMENT OF THE NAVY
DOD 316



Engineering Specifications and Standards Department (Code X)
Naval Air Engineering Center
Philadelphia, PA 19112

FOLD