


NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government project, the Government assumes no responsibility for any claims, damages, or losses, or for any other consequences that may result from the use of such data. The Government also assumes no responsibility for any claims, damages, or losses, or for any other consequences that may result from the use of such data in any way not intended by the Government.

NOTE: This drawing was approved by joint action of the Air Force and Navy Department as the Air Force Navy standard for this product. This drawing supersedes all antecedent standard drawings for the same product and shall become effective for the procurement of aeronautical supplies, or for use in new design, not later than six months after the latest date of approval shown.

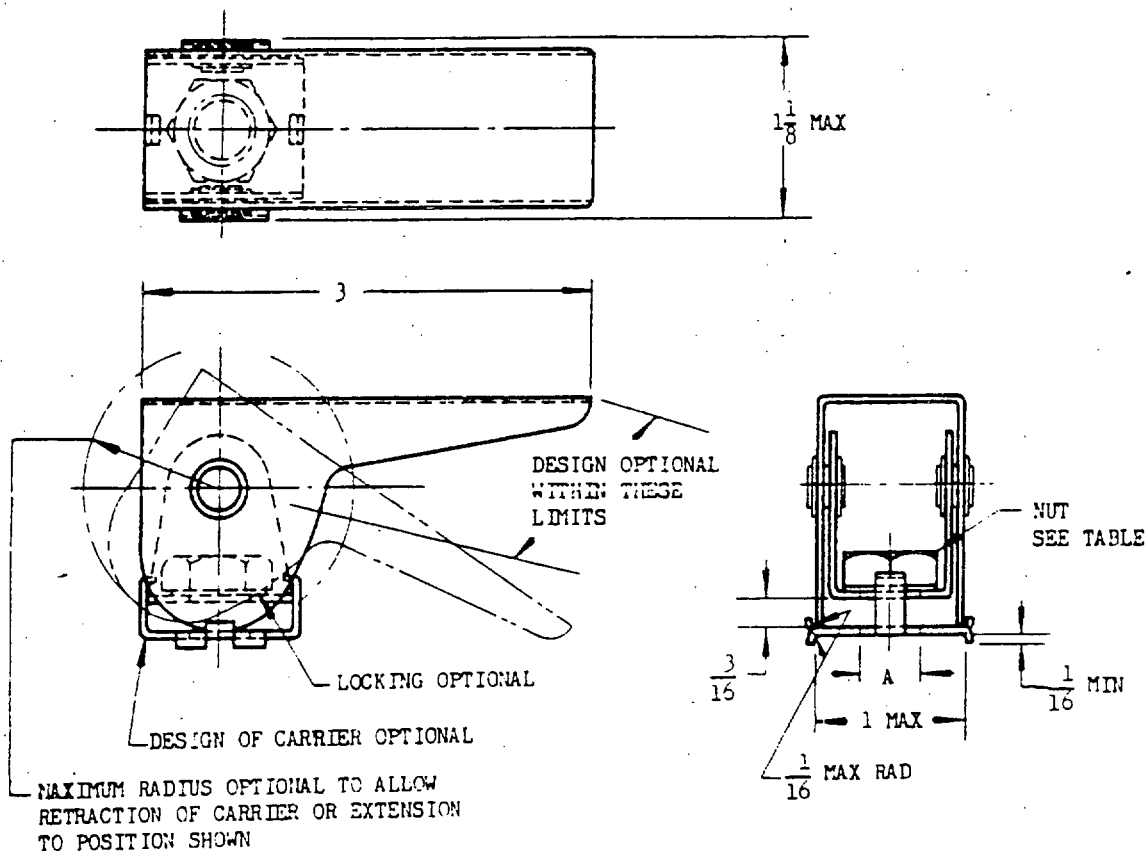

(a)	AN PART NO.	A DIA	NUT
(b)	AN3156-2	1/4	AN345-10
	AN3156-3	5/16	AN335-4
(b)	AN3156-4	5/16	AN325-4
(b)	AN3156-5	13/32	AN325-5
(b)	AN3156-6	13/32	AN325-6

(a) PREVIOUS PART NUMBER AN3156-1 INACTIVE FOR DESIGN AFTER 12 FEB 48. AN3156-1A SUPERSEDES AND IS INTERCHANGEABLE WITH AN3156-1.

PREVIOUS PART NUMBER AN3156-1A INACTIVE FOR DESIGN AFTER 2 MAY 1949. AN3156-2, -3, -4, -5, AND -6 REPLACES AN3156-1A.

(5) (b) PREVIOUS PART NUMBERS AN3156-2, -4, -5, AND -6 INACTIVE FOR DESIGN AFTER 28 AUG 1953. NO SUPERSEDING AN PART NUMBERS.

FOR DEFINITION AND APPLICATION OF DRAWING STATUS NOTES, SEE ANA BULLETIN NO. 337.

BREAK SHARP EDGES .010 MAXIMUM.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS $\pm 1/64$.

PROCUREMENT
SPECIFICATION
MIL-C-6783

AIR FORCE-NAVY AERONAUTICAL STANDARD

CLAMP - BATTERY HOLD-DOWN

AN3156

SUPERSEDES USAF DRAWING 44A5098