


NOTE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government (including any agency thereof) and the United States of America make no warranty, expressed or implied, and no responsibility is assumed by the Government for any damages resulting from the use of such data. It is the responsibility of the user to obtain the necessary rights and permissions for any other use of such data.

NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Naval standard for this product. This drawing represents an authorized standard for the use of this product and shall become effective for the procurement of standardized equipment, or for use in new designs, not later than 6 months after the latest date of approval shown.

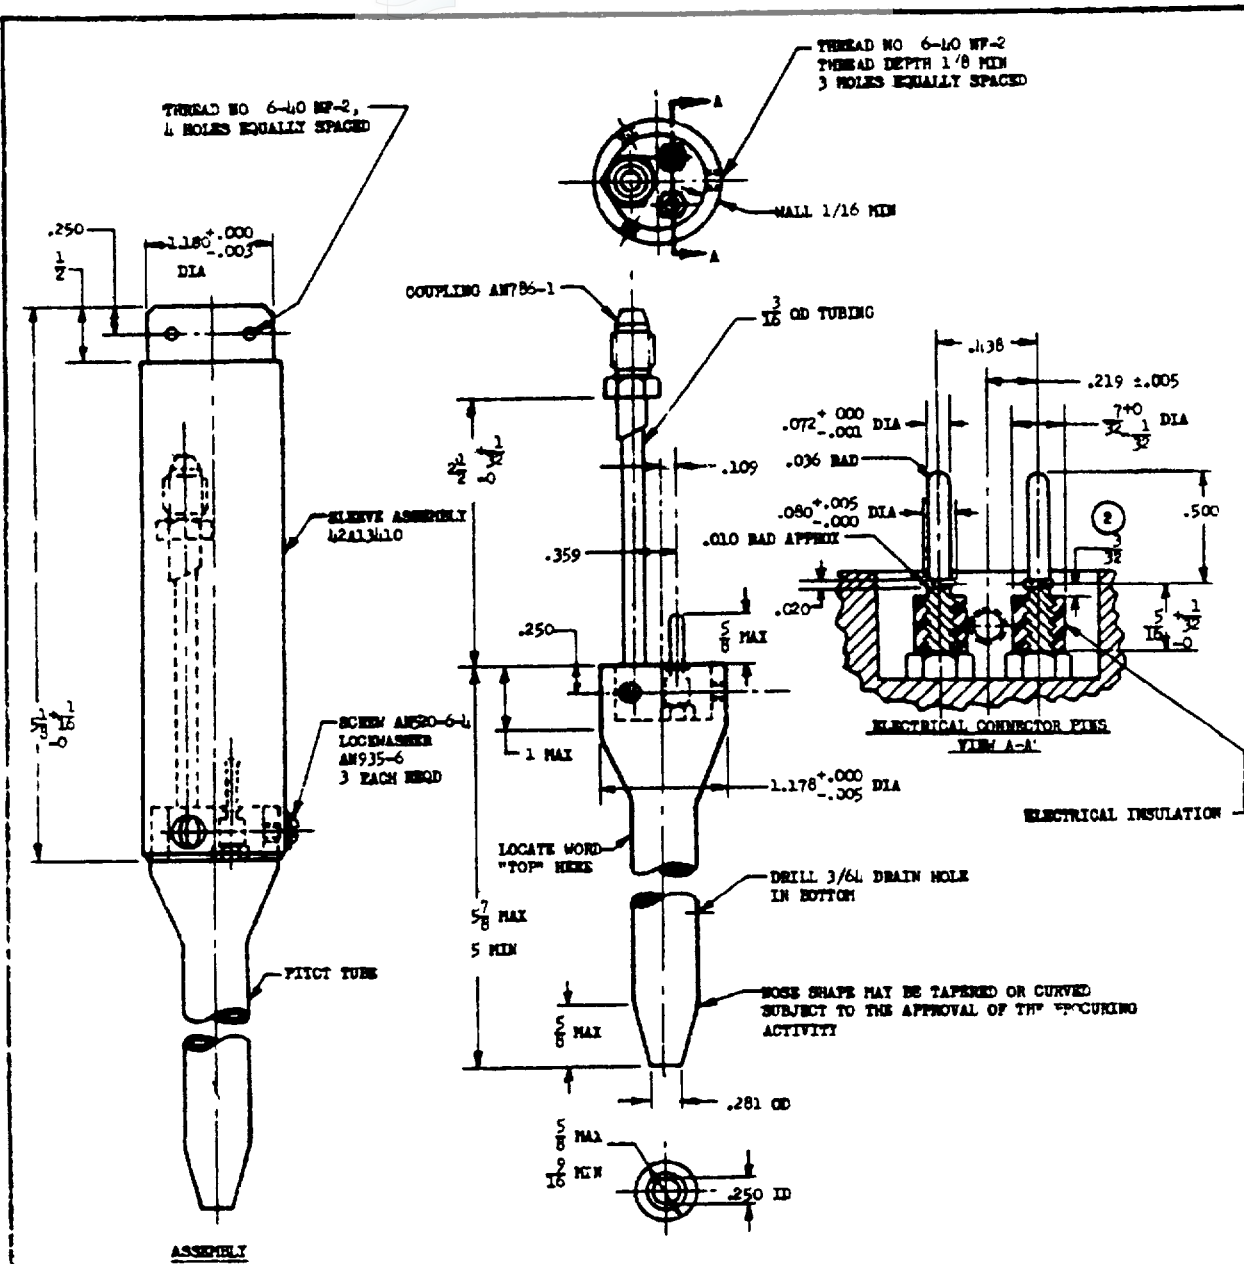

AN ASSEMBLY PART NO.	RATED VOLTAGE
AN5813-1	24 VOLT DC
AN5813-2	115 VOLT, 400 CYCLES, SINGLE PHASE AC

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS $\pm 1/64$, DECIMALS ± 0.010 , ANGLES $\pm 1/2^\circ$.
 FOR MANUFACTURING DETAILS OF SLEEVE ASSEMBLY SEE AN AIR FORCE STANDARD ISSUE OF USAF DRAWING 42413410.

PROCUREMENT
 SPECIFICATION
 MIL-7-5421

AIR FORCE-NAVY AERONAUTICAL STANDARD
 TUBE - PITOT, ELECTRICALLY HEATED

AN5813

APPROVED 26 Jan 14, REVISED 17 Feb 62 23 Oct 52