





NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in direct Government operation, the United States Government thereby bears no responsibility nor any obligation whatsoever, and it is agreed by the holder or user that it is not to be regarded by him/her or his/her agents as having furnished or supplied the said drawing, specification, or other data, or that it is not to be regarded by him/her or his/her agents as having furnished or supplied any rights or permission to manufacture, use and/or sell any product resulting from such drawing, specification, or other data.

NOTE: This drawing was approved by joint action of the Air Force and Navy Departments in the 1st February 1957 standard for the product. This drawing governs for all subsequent standard drawings for the same product and shall become effective for the procurement of aeronautical supplies, or for use in new designs, not later than 6 months after the latest date of approval shown.

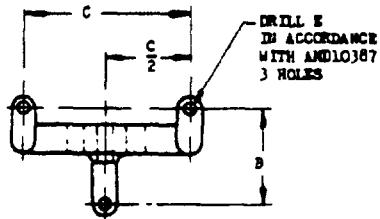

UPPER BRACKET

AN PART NO.	FOR USE WITH	B	C	E
AN6046-1	AN6045-51 AN6045-96 AN6045-117	1-3/4	3	13/64
AN6046-3	AN6045-205	2	4	13/64



LOWER BRACKET

AN PART NO	FOR USE WITH	D	E	F
AN6046-2	AN6045-57 AN6045-96 AN6045-117	2	13/64	2-1/16
AN6046-4	AN6045-205	3-2/4	13/64	3-3/8

TOTAL WEIGHT OF AN6046-1 AND AN6046-2 = .40 LB MAX.

TOTAL WEIGHT OF AN6046-3 AND AN6046-4 = 1.25 LB MAX.

DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED, TOLERANCES FRACTIONS $\pm 1/64$.

FOR MOUNTING DIMENSIONS SEE DRAWING AN6045

APPROVED 24 Feb 50 REVISED

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD		AN6046
	BRACKET - MOUNTING, EXTINGUISHER, FIRE		
MIL-E-5627			