



FAA Bonded Structure Research Projects

Peter Shyprykevich

Gatwick, United Kingdom

26 October 2004






Session Purpose

- Give understanding of FAA involvement in bonded structures
- Show areas addressed by FAA research
- Provide material for discussion of needs in bonded structure research.



Motivation

- Number of certification programs involve a large range of adhesive bonding applications
- Migration from secondary to primary structure
- Limited guidance material
- Limited experimental analytical models that can be effectively used in design.

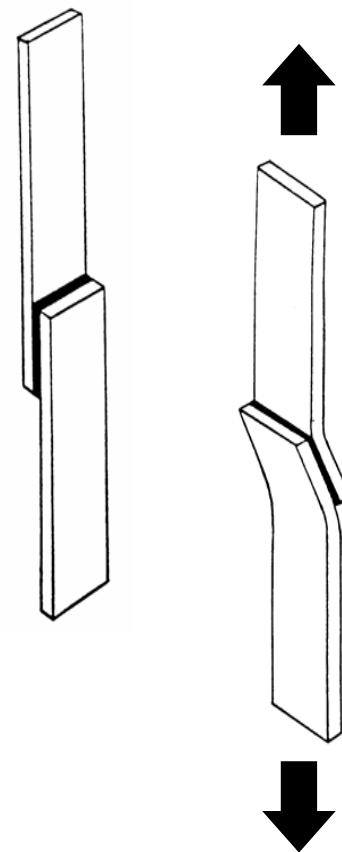



Areas of Research

- Analysis of bonded joints
- Surface preparation
- Adhesive qualification and characterization
- Effects of thick and variable bondlines
- Larger scale testing including damage tolerance.



Analysis

- Closed form solutions
 - Hyonny Kim, Purdue University
 - Keith Kedward, University of California Santa Barbara
- Code based on plate theory suitable for General Aviation community and others
 - Materials Sciences Corporation
 - Gerry Flanagan, Rachael Andrulonis




Bonded Joint Stress Analyses


- Closed form model
- In-plane shear loading
 - Combined shear + tension loading
 - Plastic strain-based ultimate load
 - Variable bondline thickness
 - Tension loading in general unbalanced single lap joint
- Reports
 - “Stress Analysis of In-plane Shear-Loaded Adhesively Bonded Composite Joints and Assemblies” DOD/FAA/AR-01/7
 - “Characterization of In-plane, Shear-Loaded Adhesive Lap Joints: Experiment and Analysis” DOD/FAA/AR-03/21



General Joint Loading

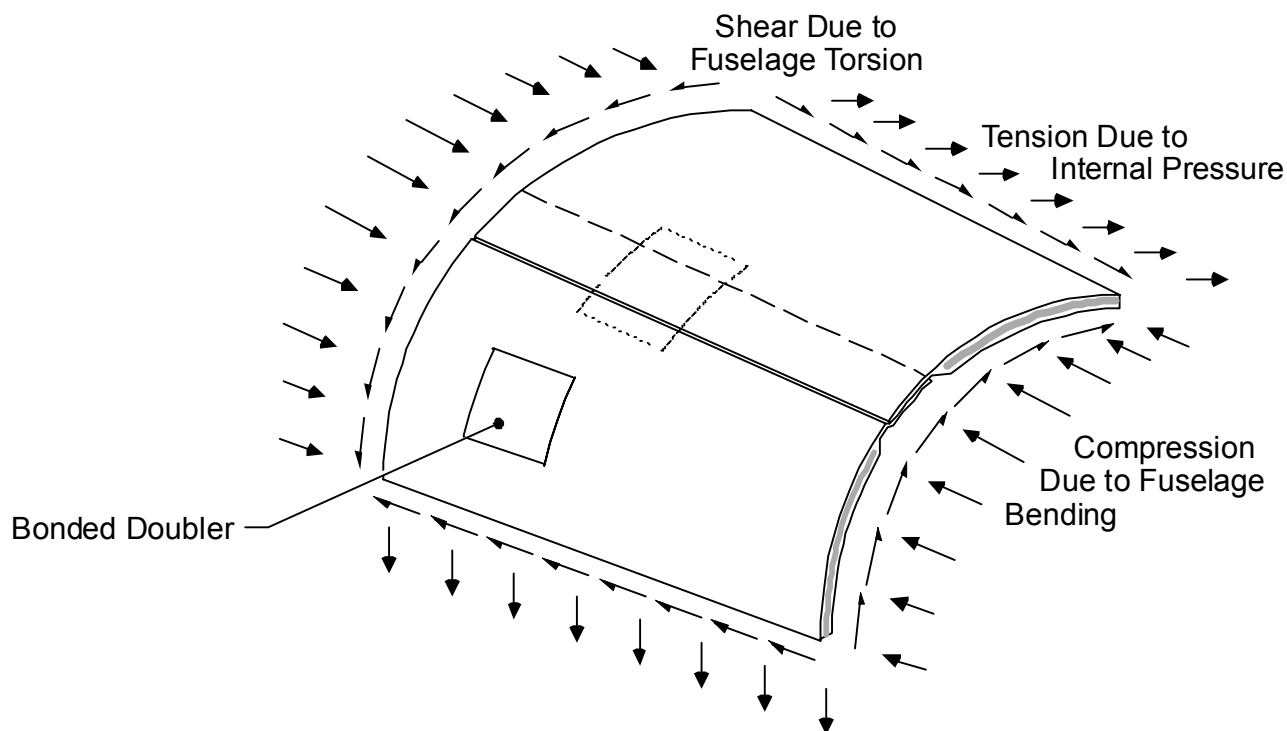



**Segment of Joint
Loaded by Biaxial
Tension/Compression
and Shear**

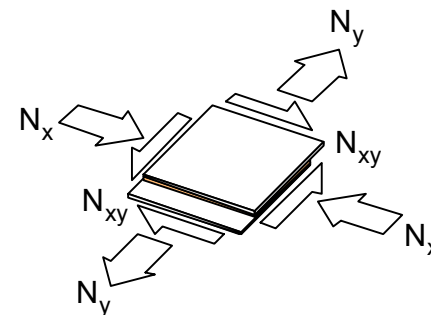

In-plane shear + tension produces adhesive shear stress



In-Plane Shear Loaded Lap Joint

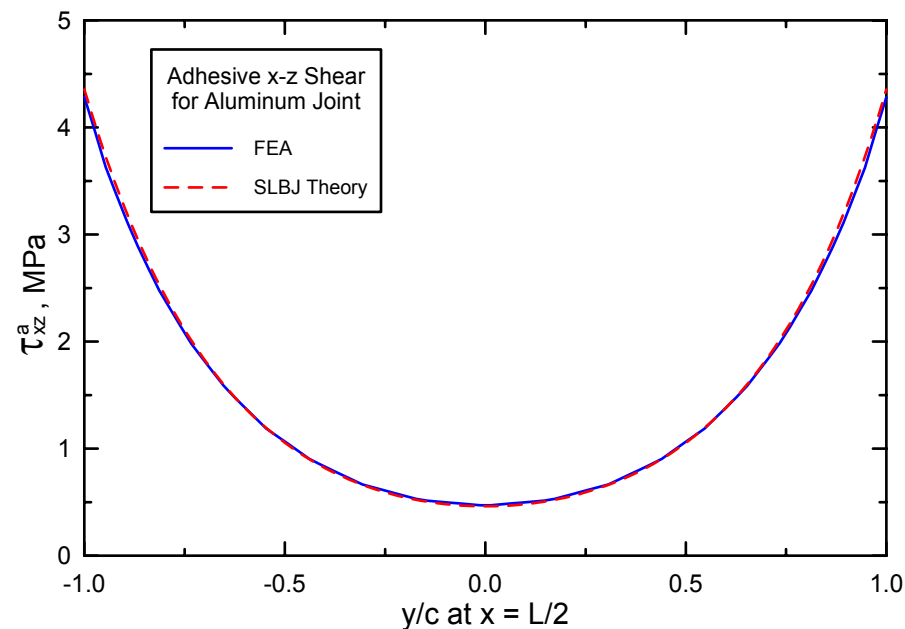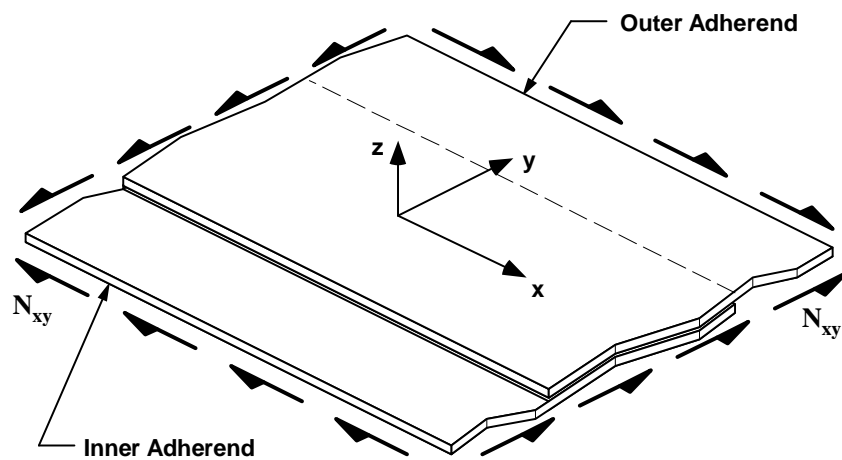



In-plane shear load transfer across joint
 produces τ_{xz} shear stress in adhesive

Kim, H. and Kedward, K.T., "Stress Analysis of Adhesive Bonded Joints Under In-Plane Shear Loading,"
Journal of Adhesion, Vol. 76, No. 1, 2001, pp. 1-36.



Combined Loading: Shear + Tension



Von-Mises Based Failure Envelope

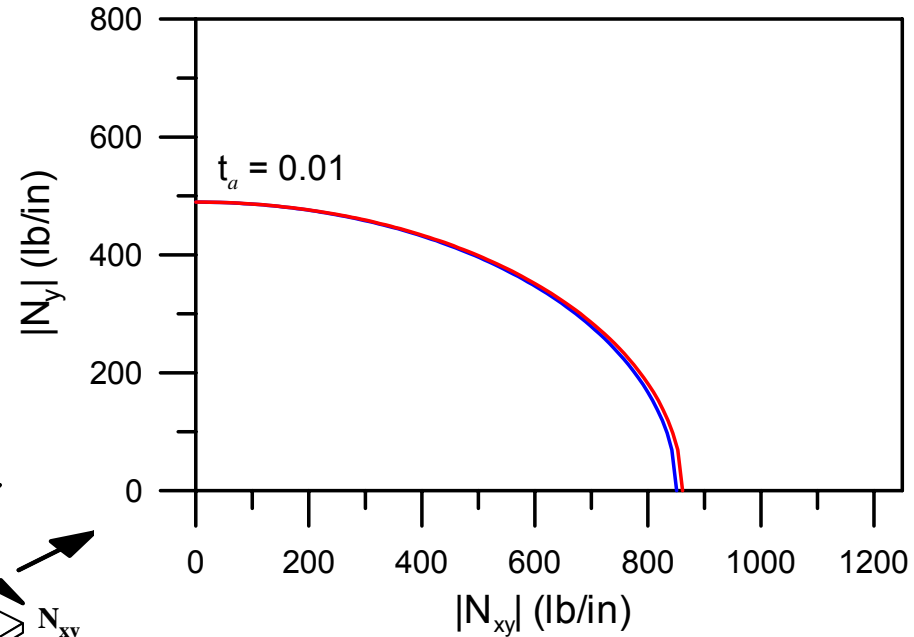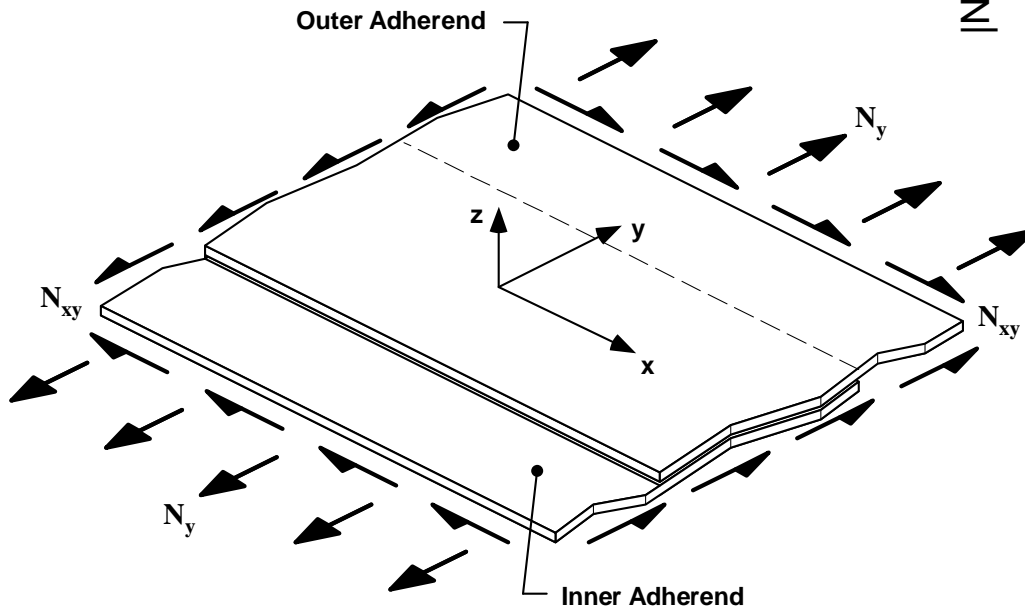



Plastic Strain-Based Ultimate Load


- In-plane shear loading
- Ductile adhesive joint carries greater load than elastic-limit design
- More conservative than Hart-Smith elastic-perfectly plastic model

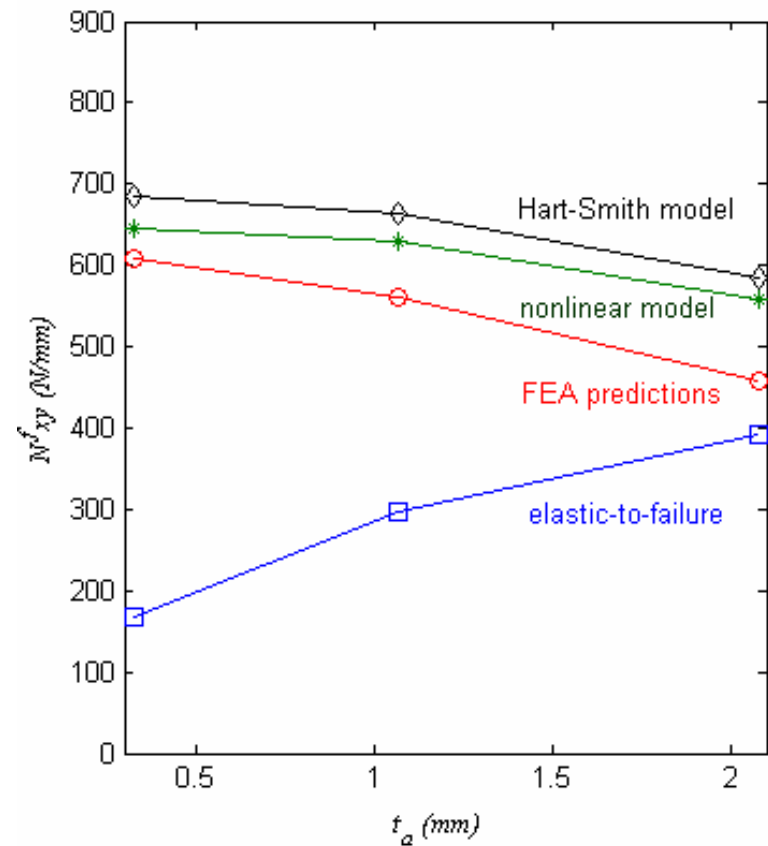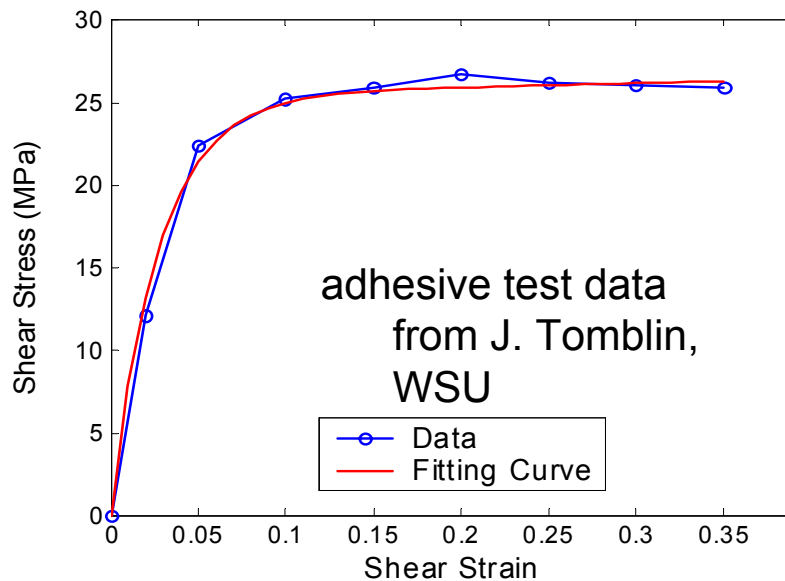




Failure Prediction vs. Test Data

- Box-beam torsion lap shear coupon
- Experiments conducted by Wichita State University (John Tomblin)

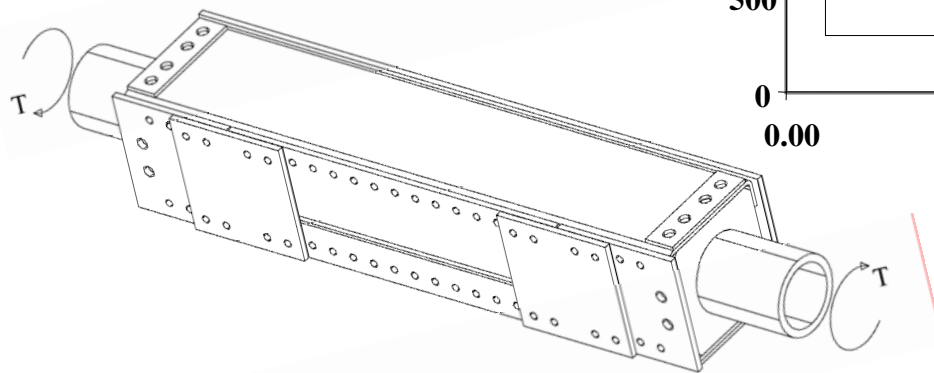

Maximum Shear Flow

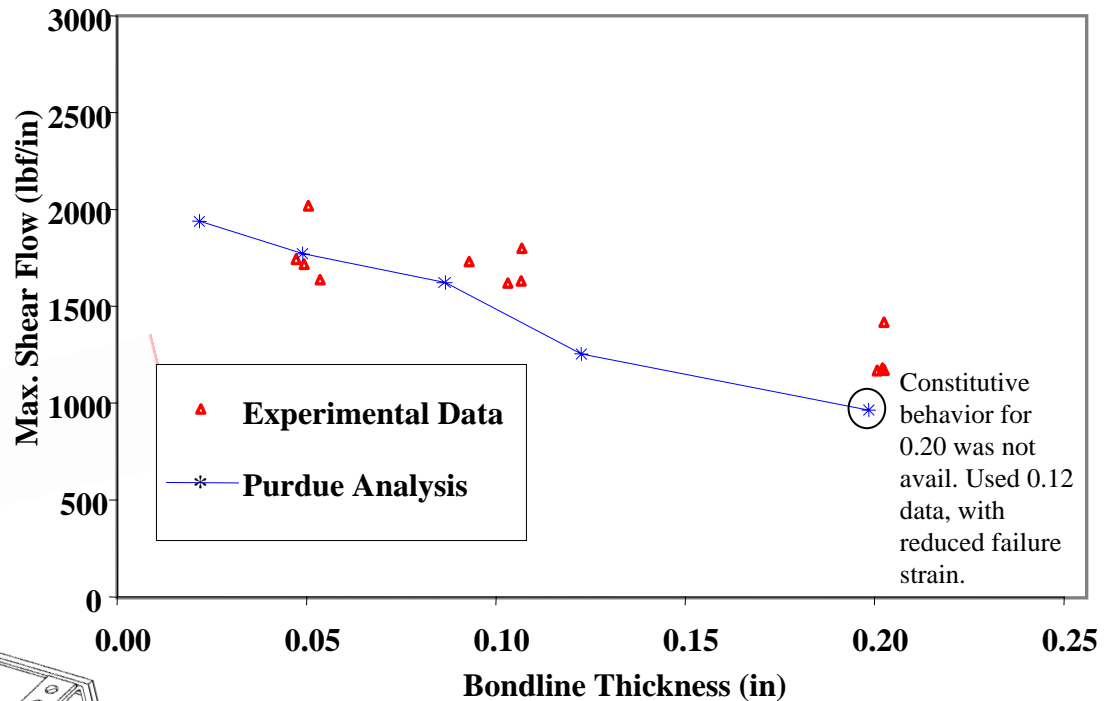



New Analysis Code

- Create a new bonded joint analysis standard
 - Replace A4EI as a referenced standard
 - Much broader class of problems
 - Handle bending, peel, and general adhesive nonlinearity
- Handle adhesive mechanics in a rigorous fashion
 - Adhesive as a 3D material
 - Thickness effects, including thickness variability
- Provide intelligent failure criteria
 - Adhesive and adherends
 - Stress/strain based and fracture mechanics capability
- Release a commercial quality code
 - Modern, Windows based GUI
 - Documentation
- Perform validation tests.



Analysis Approach

- Modify an existing code that handles interlaminar stress and fracture for composite laminates
- Wrap a graphical user interface around analysis code
 - Parametric models for most possible joint topologies
 - Database management for material properties and user models
 - Graphical display of output
 - VB.net based
- Build failure models on top of analysis code
 - Highly modular system
 - User customization




Existing Code: SUBLAM

- Originally developed by G. Flanagan under NASA funding
- Continued development by MSC and Navy
- Modern, well documented FORTRAN 95 code
- Allows for general, finite-element-like modeling, but is designed to yield accurate interlaminar stress components with extremely coarse models
- Added material nonlinearity to code.








Some Concepts from SUBLAM

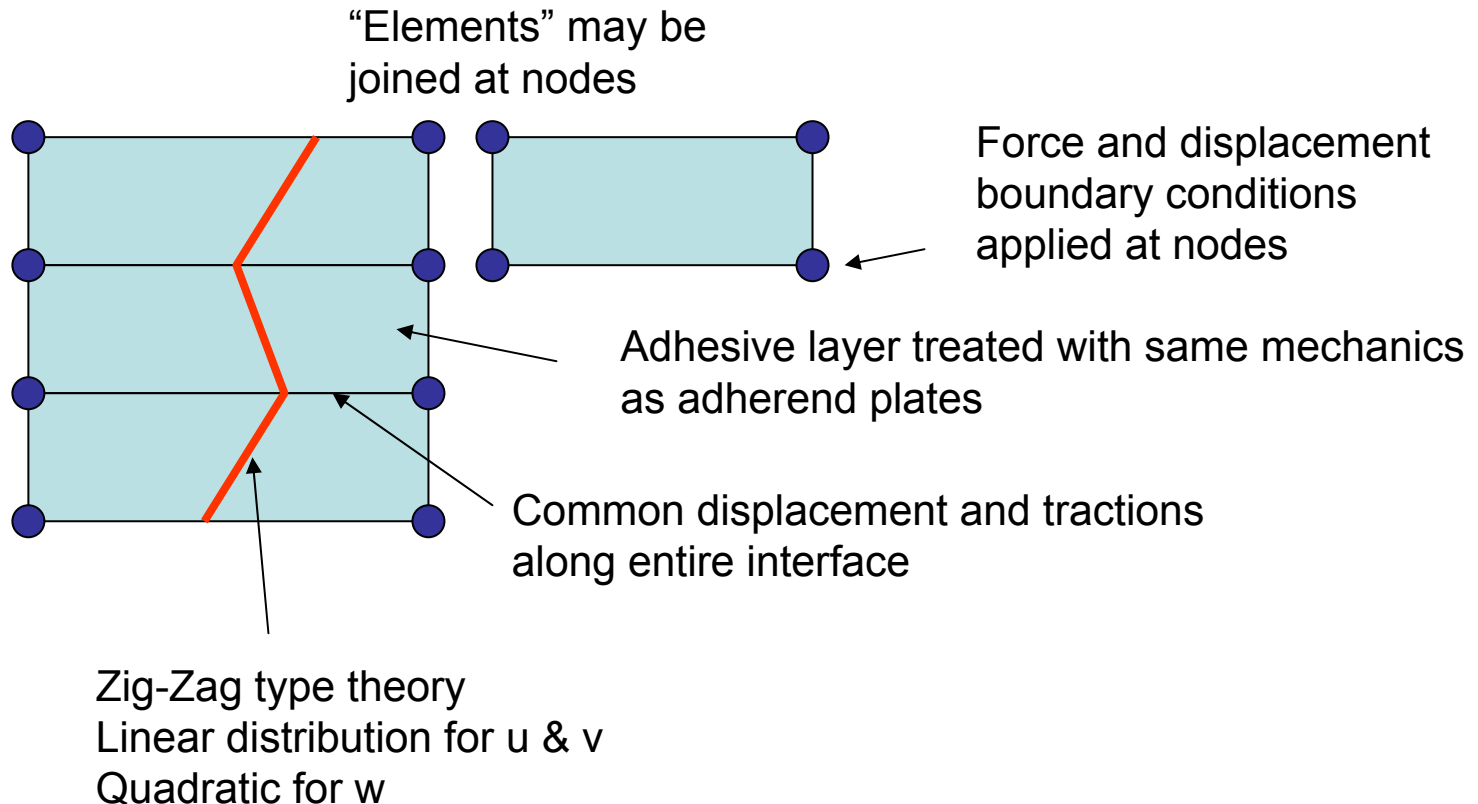



Classes of Problems Solved by SUBLAM

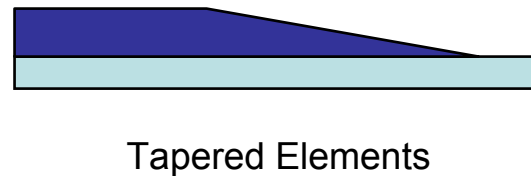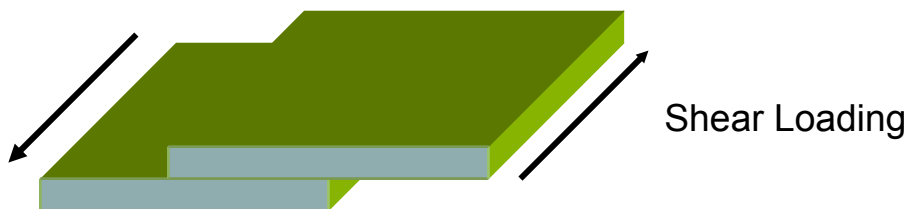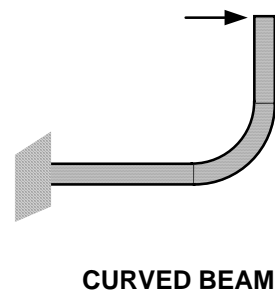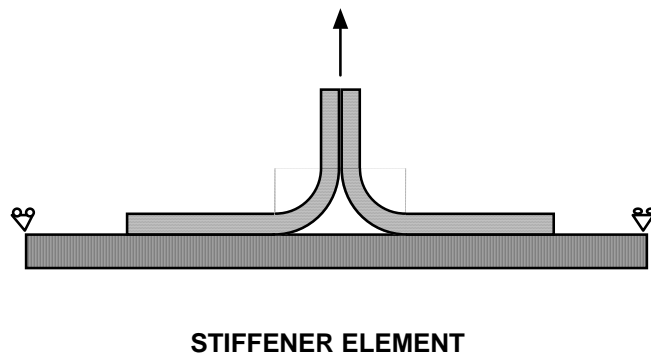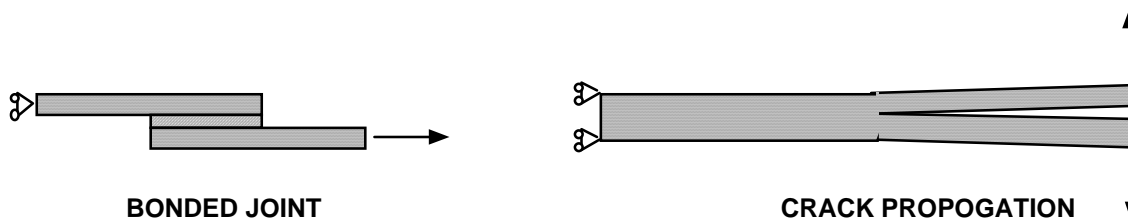



SUBLAM Approach

- Stacked, high-order plates
 - Plates are laminated, with full material information captured
 - For uniform plates, governing differential equations solved in closed-form
 - Plate equilibrium equations used to compute interfacial tractions
- Plates joined end-to-end to form complex structures
- Tapered and nonlinear elements handled using P-element approach
 - Legendre polynomial series
 - Equilibrium equations used as with exact solution
- Generalized plane-strain
 - Prismatic structures



Graphical User Interface

- Standard Microsoft Windows features
- Extensive use of database concepts
 - Storage of material properties
 - Store user models
- Interactive parametric modeling
- Graphical output and report generation.



Joggle Single Lap Joint with Flat Exterior Model Definition

Model ID:

Model Name:

Model Comments:

Geometry | Forces, Displacements, and Moments | Input File

The Joggle Single Lap Joint with Flat Exterior has a joggle in Plate #1 in order to flatten the exterior of the (overall) bonded joint.

About... | Plate #1 (Joggled) | Bond + Termination Geometries | Plate #2 (Flat)

Save Cancel



Joggle Single Lap Joint with Flat Exterior Model Definition

Model ID:

Model Name:

Model Comments:

Geometry | Forces, Displacements, and Moments | Input File

Overall Plate Length:

Overall Joggle Length:

☐ Straight Joggle Offset:

☐ Bond Offset:

About... | Plate #1 (Joggled) | Bond + Termination Geometries | Plate #2 (Flat)

Save Cancel



Joggle Single Lap Joint with Flat Exterior Model Definition ABBOTTAEROSPACE.COM

Model ID: 5

Model Name:

Model Comments:

Geometry | Forces, Displacements, and Moments | Input File

Plate #1 Termination Geometry

☐ H1: W1:

☐ H2: W2:

Plate #2 Termination Geometry

☐ H1: W1:

☐ H2: W2:

Bond Length: Bond Thickness:

About... | Plate #1 (Joggled) | Bond + Termination Geometries | Plate #2 (Flat)

Save Cancel



Analysis Code - Summary

- A commercial quality, very general bonded joint analysis code is being created
 - Built on a proven, accurate, analysis engine
 - Graphical interface for productivity and ease-of-introduction
- Code is being combined with advanced mechanics concepts for adhesive behavior
- Beta testing - next month
- Technical Contact at MSC
 - Gerry Flanagan, flanagan@materials-sciences.com




Surface Preparation

- Peel-ply effects, sanding, and mechanical test evaluations
 - Jason Bardis and Keith Kedward at University of California Santa Barbara
 - Reports
 - “Effects of Surface Preparation on Long-term Durability of Composite Adhesive Joints” DOT/FAA/AR-01-7
 - “Effects of Surface Preparation on Long-term Durability of Adhesively Bonded Composite Joints” DOT/FAA/AR-03-53
- Started four grants to develop chemical test(s) for adequacy of surface preparation, moisture effects, and aging
 - Wichita State, U. of Washington, Washington State, Florida International




Surface Preparation and Peel Ply Studies


- University of California Santa Barbara Objectives:
Develop guidance and supporting engineering practice to minimize or prevent interfacial failure in composite bonded joints
 - Material nomenclature (peel ply vs. release fabric)
 - Recommended fabrication practices
 - Quantitative methods to substantiate bond processes (chemical & mechanical testing during fabrication)
- Technical considerations in initial UCSB work
 - Chemical contamination of removable plies
 - Abrasion for surface preparation
 - Mechanical quality control tests

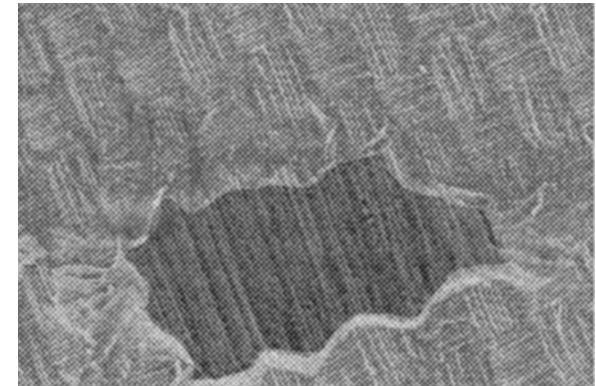

Chemical contamination from a nylon release fabric causes interfacial failures
(Ref: Hart-Smith, Brown, Wong)

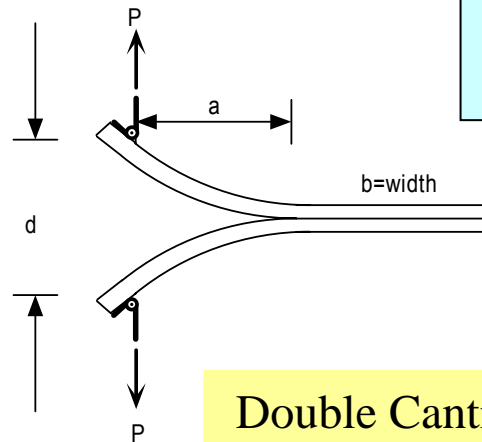

Double Cantilever Beam (DCB) Test

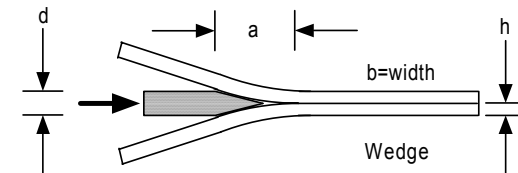


Composite equivalent of the Boeing wedge test



UCSB Bonding Results

- Improper use of removable layers has led to AD
- Removable plies or layers that leave chemical contamination on bonding surfaces include release fabrics and release films
 - Surface abrasion (grit blasting) will not guarantee the elimination of contaminants and potential, undesirable adhesive (interfacial) failures
 - Ongoing efforts to establish standard terminology for removable plies and update product labels & technical literature to warn of potential bonding problems
- The terminology “peel ply” will be used only for those removable plies that contain no chemical treatment to aid release
 - More research is needed to establish guidance for peel ply use in bonding

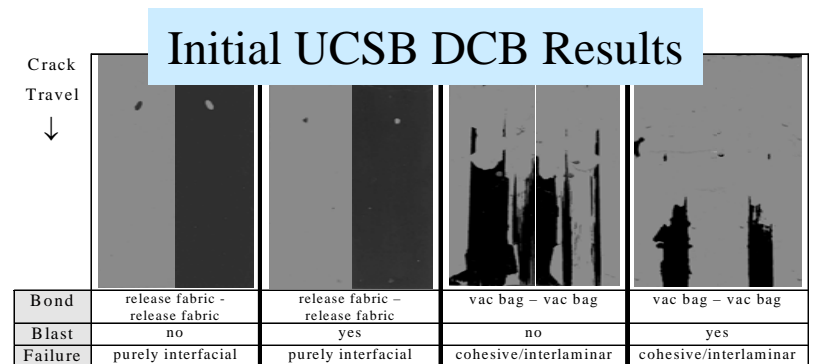

Black is IM7/8552 adherend, gray is EA9394 adhesive



Adhesive Qualification and Characterization

- Adhesive qualification
 - FAA Survey
 - John Tomblin, Wichita State University
 - Test method development
 - Charles Yang, Wichita State University
 - Dan Adams, University of Utah
- Adhesive characterization
 - Static properties
 - John Tomblin et al, Wichita State University
 - Fatigue and creep
 - John Tomblin et al, Wichita State University




Adhesive Qualification

- FAA Survey
 - Results of survey were discussed at the US Workshop
- Test method development
 - Lap shear test methods
 - “Investigation of Adhesive Behavior in Aircraft Applications” DOT/FAA/AR-01/57
 - “Analytical Modeling of ASTM Lap Shear Adhesive Specimens” DOT/FAA/AR-02/130
 - Bulk adhesive testing
 - Use recently developed University of Utah V-Notch Rail Shear Test for bulk shear property
 - “Development and Evaluation of the V-Notched Rail Shear Test for Composite Laminates” DOT/FAA/AR-03/63



Adhesive Test Methods

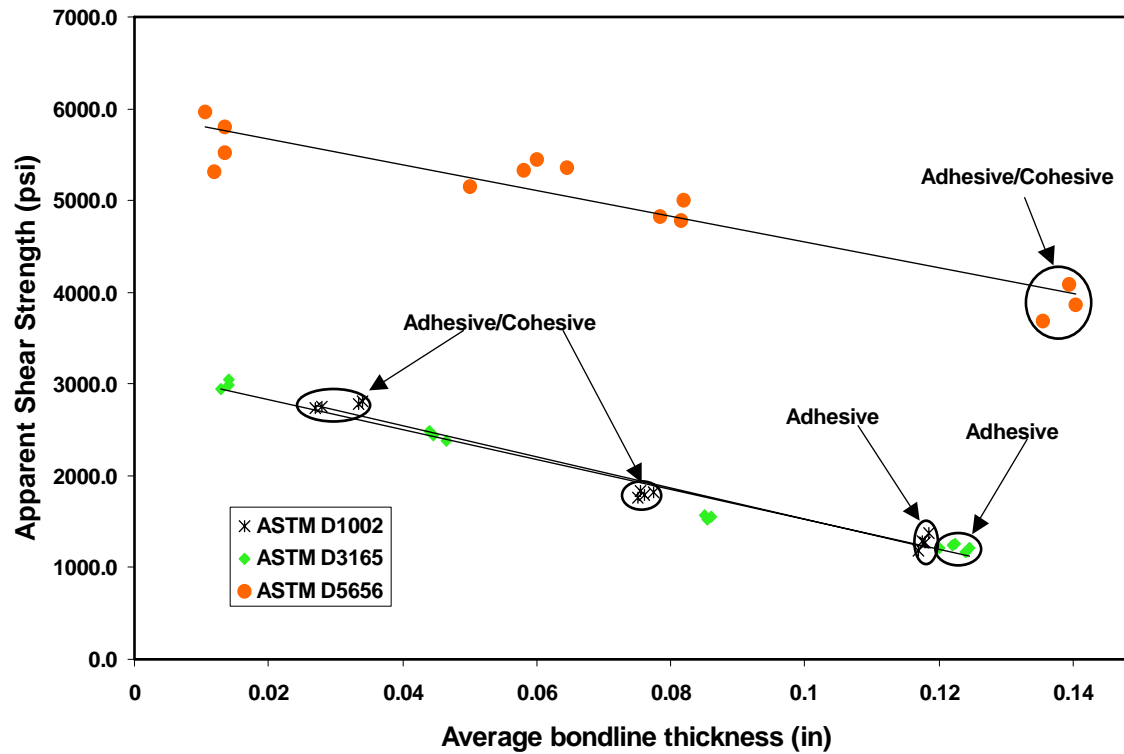


- ASTM D1002 & D3165 for **joint** characterization
- ASTM D5656 for **adhesive** characterization



ASTM D5656 Test Method

- Thick adherend
 - **Adhesive** characterization rather than **Joint** characterization
 - Elastic Limit & Plastic Strain
 - Design & Analysis
 - Reduces peel stresses
- Correction for metal deformation
- Four-Pin Configuration
 - Reduces errors due to rotation and slippage
 - Reduces scatter in data

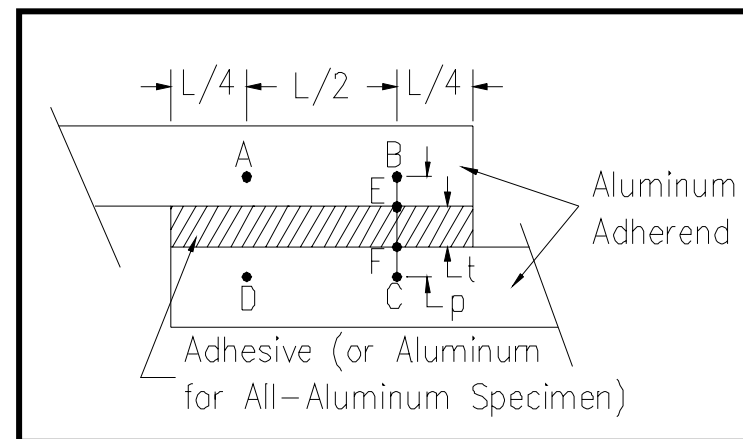




Failure Modes



a. Adherend Failure
(Outside of Joint)



b. Adherend Failure
(Composite Interlaminar Fracture)

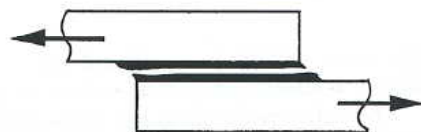

c. Cohesive Failure
(Shear)



d. Cohesive Failure
(Peel)



e. Adhesive Failure
(Shear)



f. Adhesive Failure
(Peel)

ASTM D5656




Adhesive Characterization

- Static properties
 - “Shear Stress-Strain Data for Structural Adhesives” DOT/FAA/AR-02/97
- Fatigue and creep
 - “Fatigue and Stress Relaxation of Adhesives in Bonded Joints” DOT/FAA/AR-03/56



Test Matrix for Determination of Shear Properties of Structural Adhesives

- 18 Adhesive Types
 - 6 Film Adhesives
 - 12 Paste Adhesives
- ASTM D5656 [4 pin holes]
- Three Environmental Conditions
 - Room Temp. ambient [RTD]
 - Elevated Temp. (180°F) dry [ETD]
 - Elevated Temp. (180°F) wet [ETW]
 - 145 °F and 85% relative humidity for 1000 hrs
- Bondline Thickness
 - Film Adhesives: 0.01" – 0.03"
 - Paste Adhesives: 0.03" – 0.05"

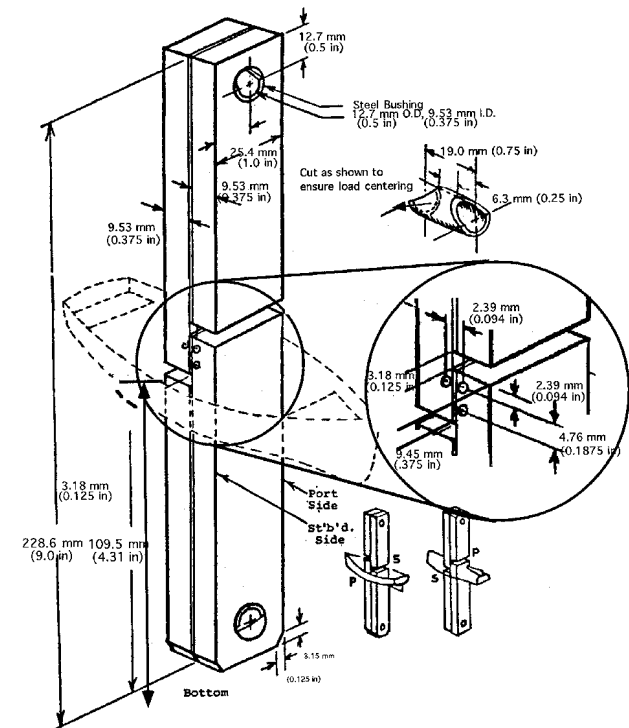



Adhesive Types Investigated

■ Film Adhesives (6)

- AF 126
- EA 9628
- EA 9695
- EA 9696
- FM 300
- FM 73

■ Paste Adhesives (12)


- EA 9309.3 NA
- EA 9346.5
- EA 9359.3
- EA 9360
- EA 9392
- EA 9394
- EA 9396
- MGS L418
- PTM&W ES 6292
- 3M DP-460 EG
- 3M DP-460 NS
- 3M DP-820



*Adhesives & Aluminum sub-panels
(Phosphoric Anodized) were provided
by Cessna Aircraft, Wichita, KS*




Apparent Shear Strength Comparison

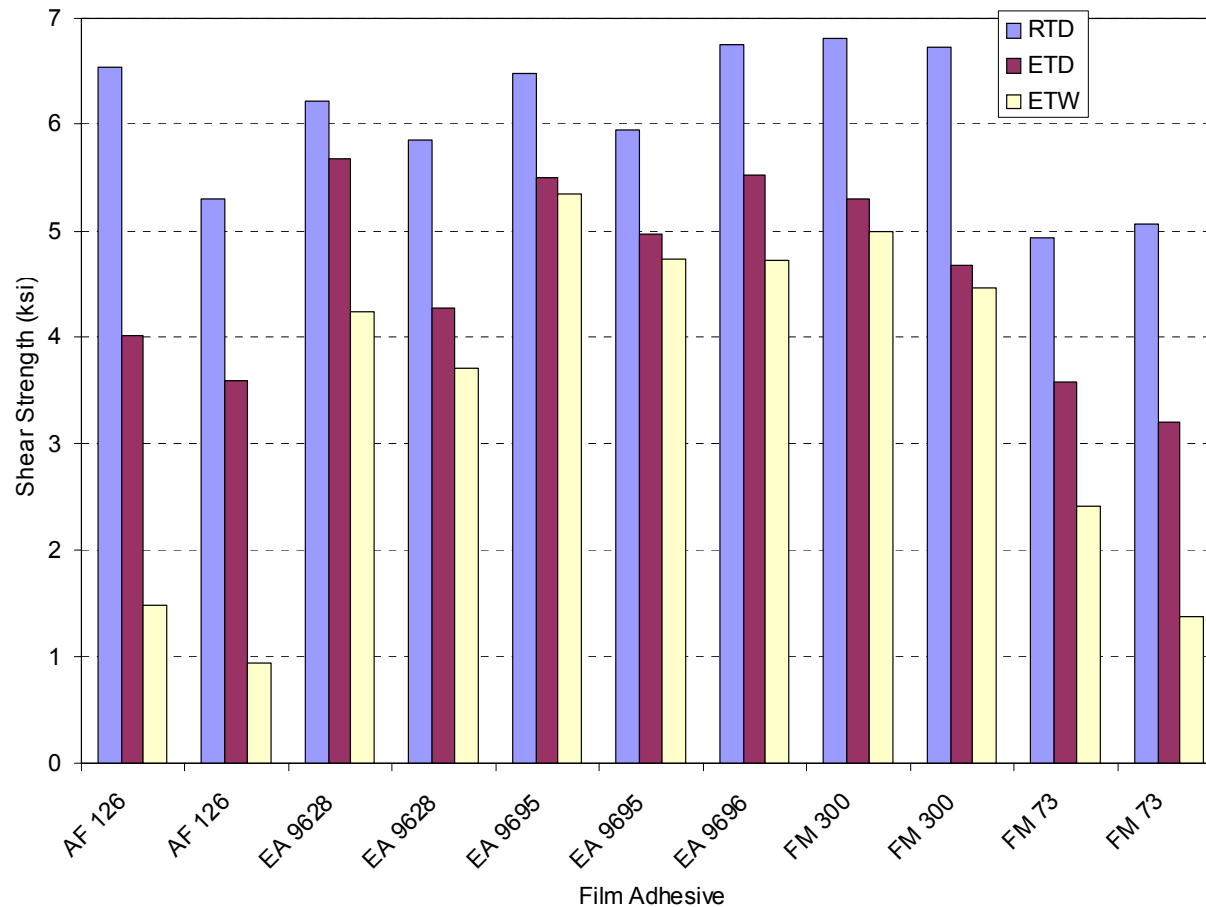




Apparent Shear Strength Comparison

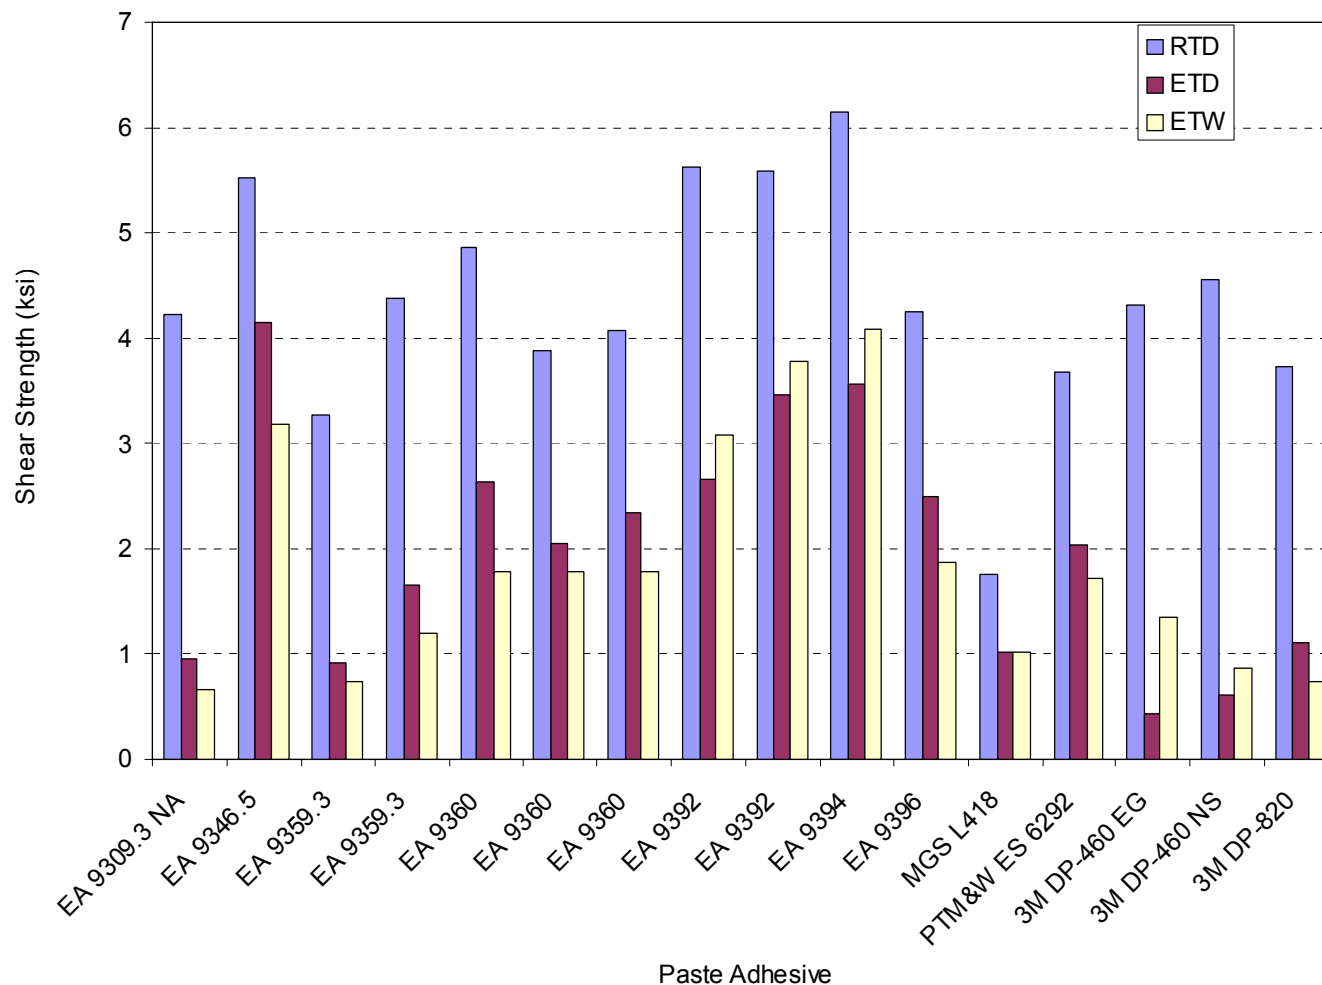




Initial Shear Modulus Comparisons

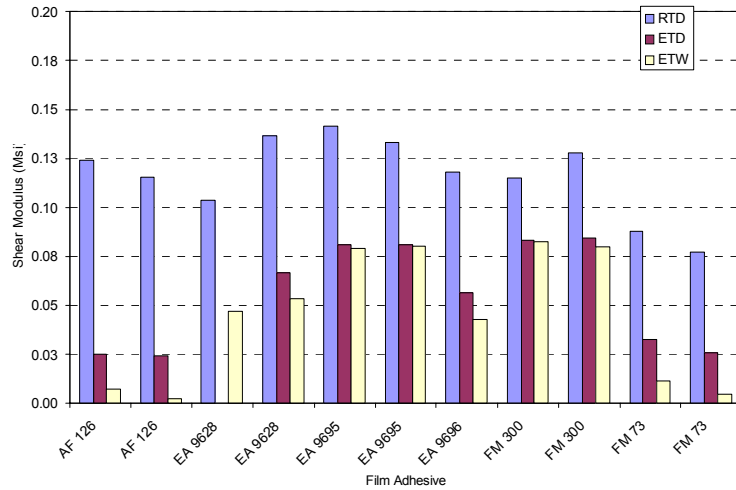

Film Adhesive

Paste Adhesive

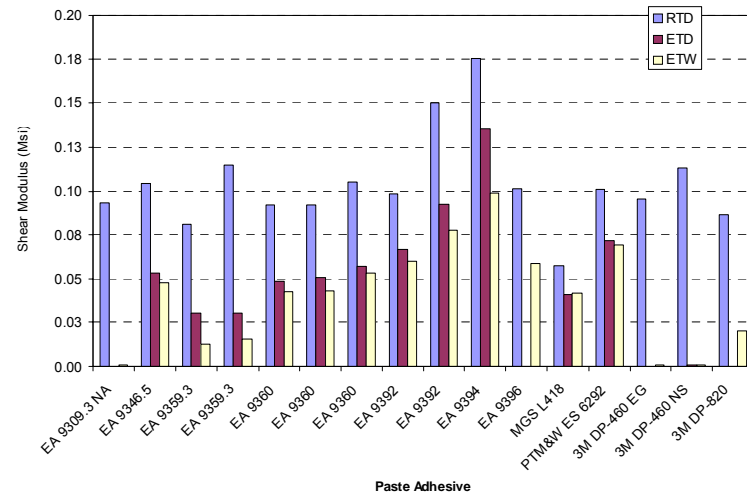



Fatigue of Thick Bondline Adhesive Joints

Modified ASTM D3166-99
[Aluminum Adherend of 0.375"]

- Three Adhesives
 - PTM&W [0.060" & 0.160"]
 - Loctite [0.032"]
 - EA9696 [0.02"]
- Three Stress Levels
 - 10^3 , 10^4 and 10^5 cycles
- Three Frequencies
 - $F=2$ Hz, 5 Hz and 10 Hz
- Three Environmental Conditions
 - RTD, RTW
 - CTD (-40°F)



Stress Level Determination

Based on the initial SN
Curve


$$y = -3.227 \cdot \ln(x) + 100.96$$

100000Cy SL1≈65% UL ≈183% LL

10000Cy SL2≈72% UL ≈202% LL

1000Cy SL3≈78% UL ≈220% LL


Note: For RTW and CTD, %UL are
different

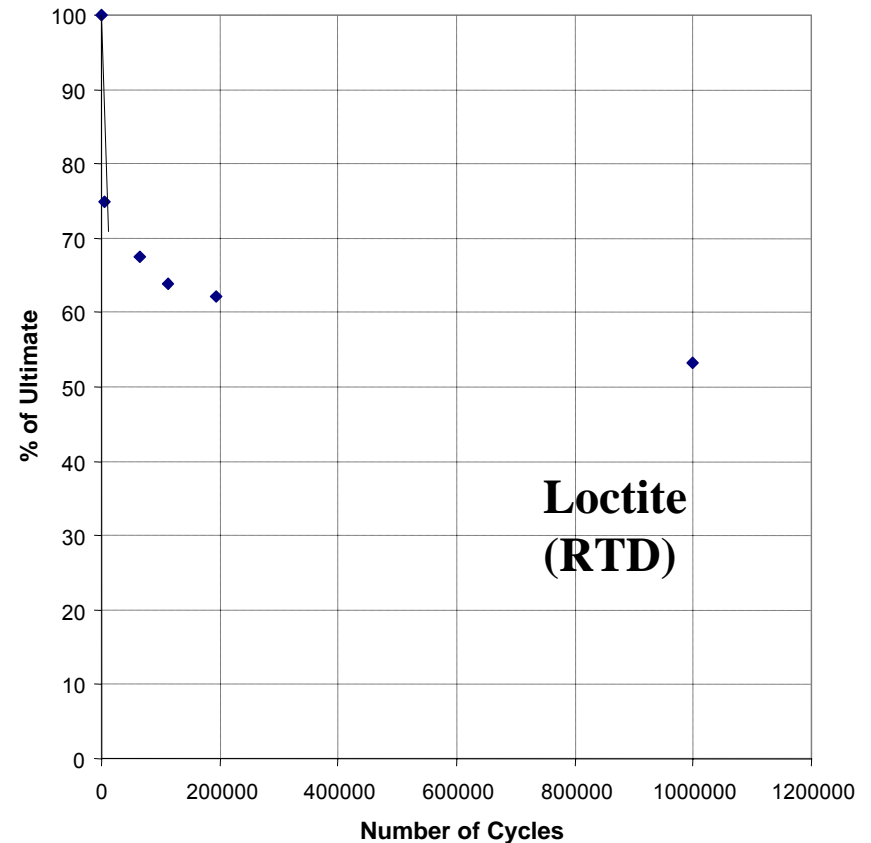




Loctite Stress Levels


Loctite RTD

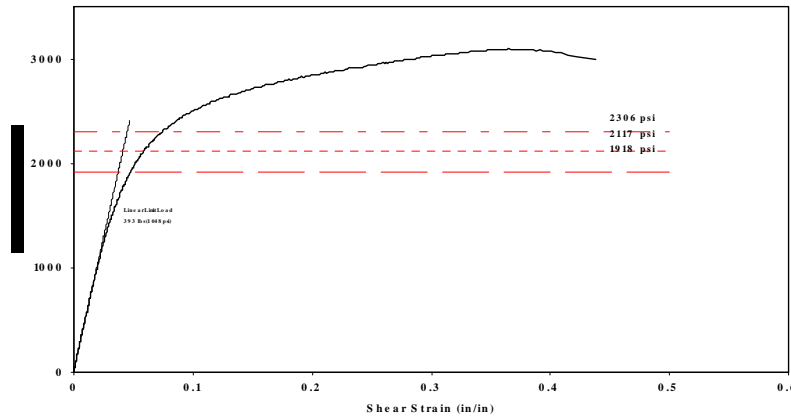

Loctite CTD

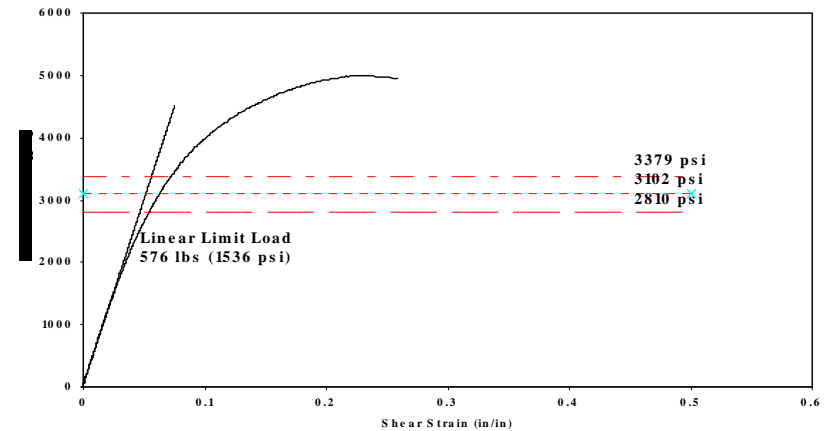

Loctite RTW

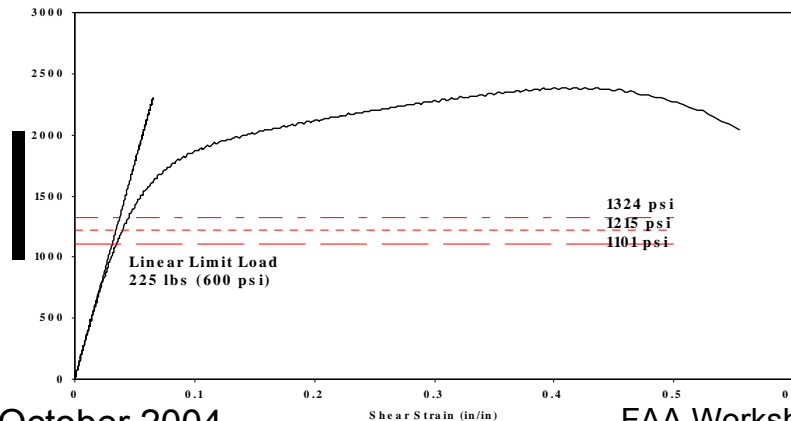

Fatigue life in a range below knee point and above linear limit point.





Fatigue Behavior of Adhesives

- *'High stress'* fatigue life of adhesive exists in a range below *Knee point* and above *linear limit point*
- Failure modes indicate that moisture affects adhesive bulk instead of the adhesive-adherend interface (RTW cohesive failures)
- Observation – lower void content in bondline equals longer fatigue life
- Film adhesive indicates better resistance to moisture (less voids?)
- Low frequencies resulted in shorter life, probably due to creep effects: high frequencies did not result in temperature increase during testing



Stress Relaxation of Adhesive Joints


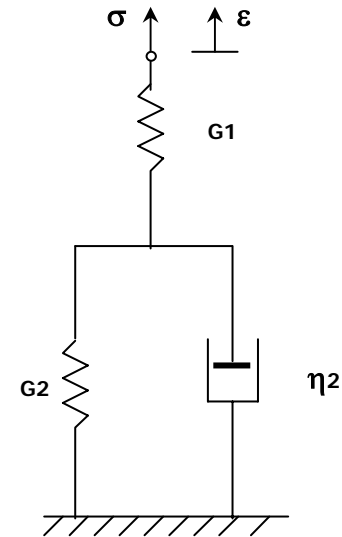
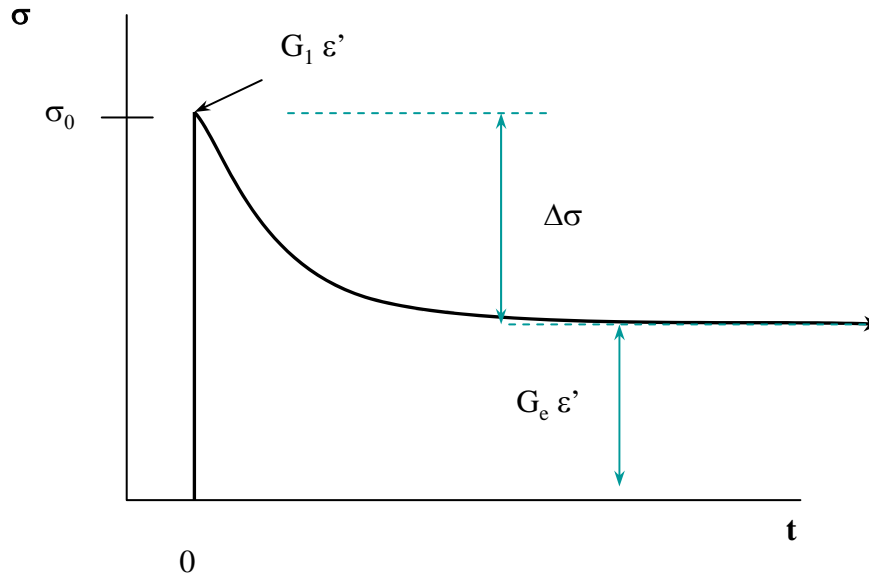


- Applied stress gradually decreases to a stable value over time
- Elastic strain that appears during initial rapid loading is slowly replaced by creep strain, with the total of the two being constant
- Steady-state creep and linear viscoelastic material behavior




Modified ALCOA Stressing Fixture

Calibration for each environmental condition

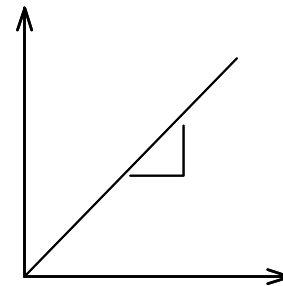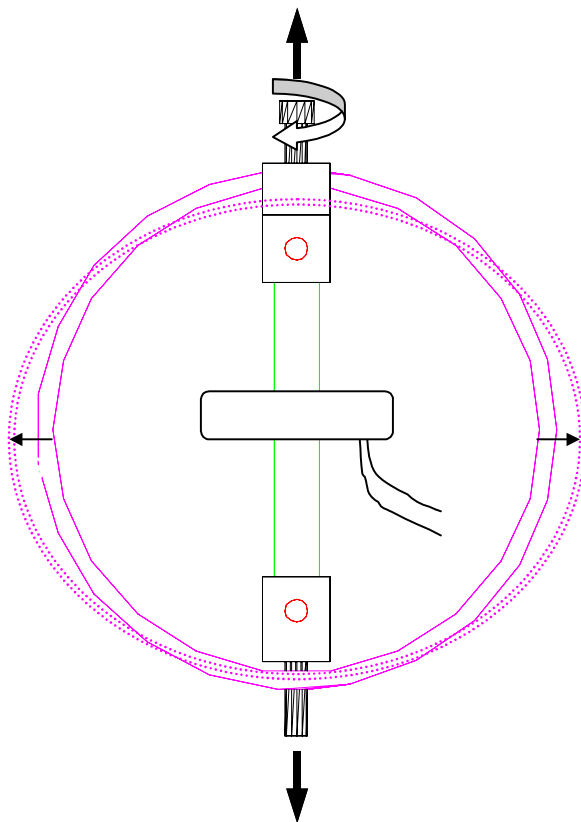


$$\sigma(t) = \mu \cdot 2 \delta(t)$$

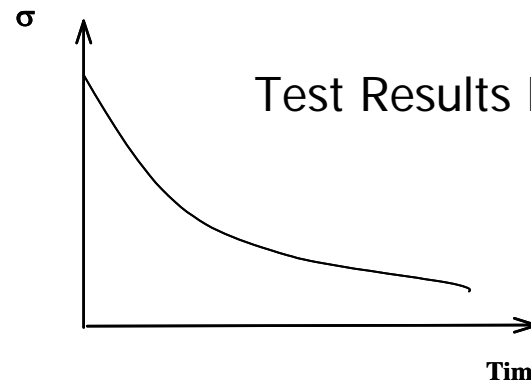

Test Results Format



Stress Level Determination

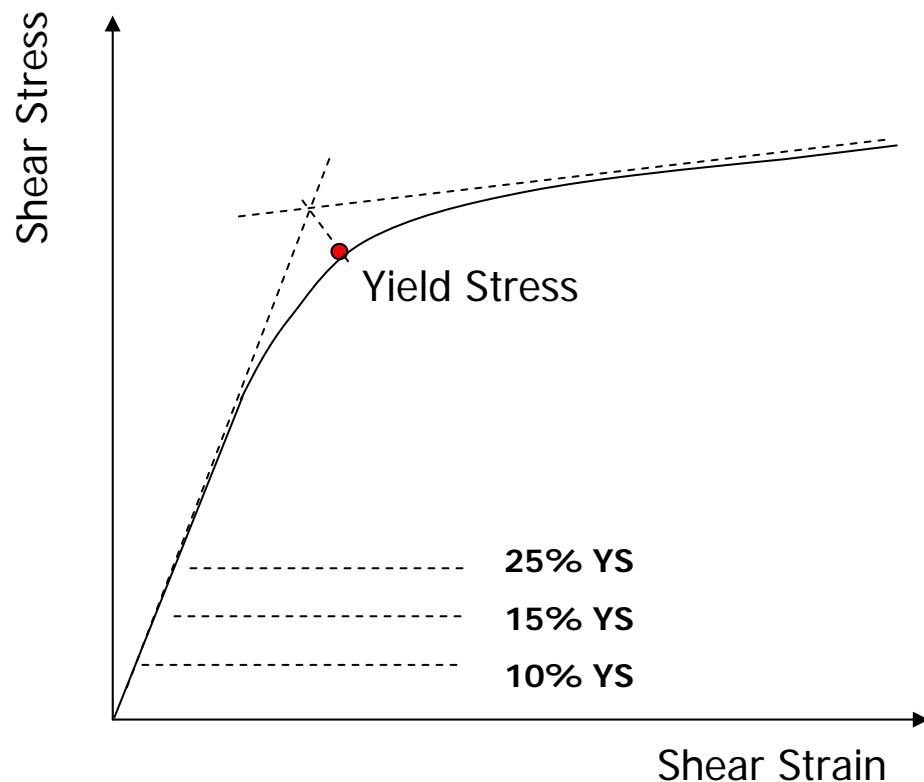

Test Temperatures


150°F

180°F

210°F




Creep Deformation

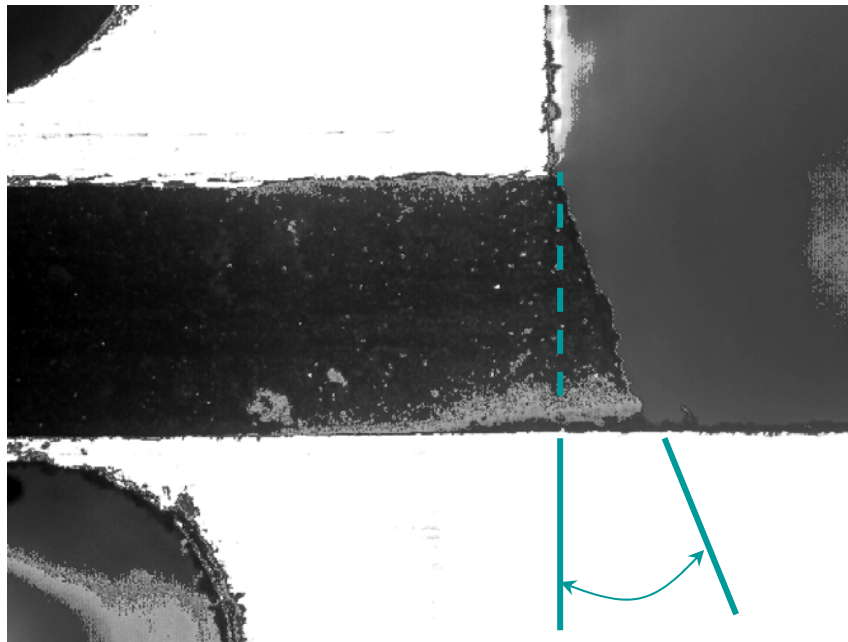

$\sim 18^\circ$



[50X magnification]

- Loctite
 - 25% YS
 - 180 °F
 - 167 hours

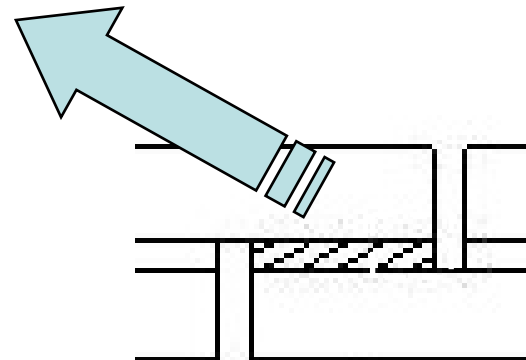




Loctite Stress Relaxation Results

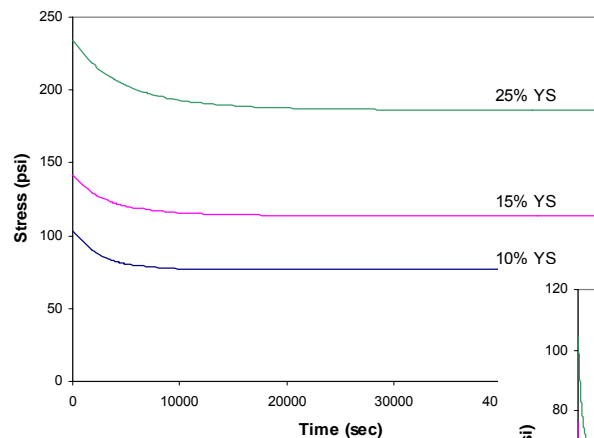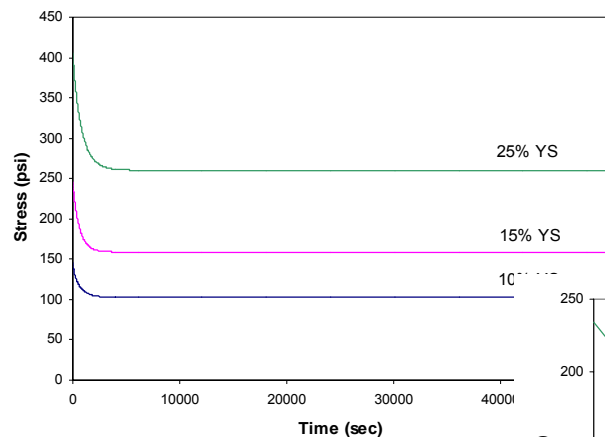

210 °F

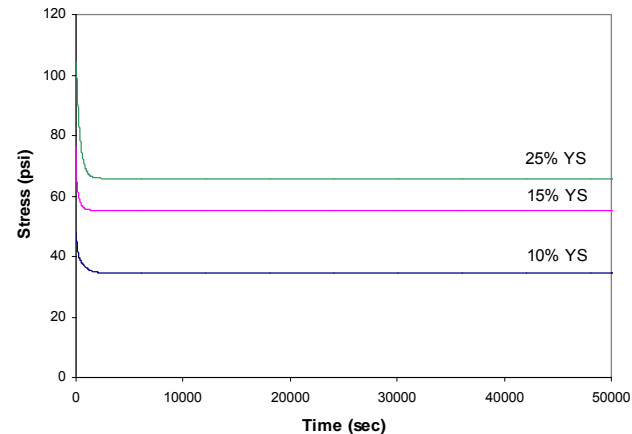




Thick and Variable Bondline Effects

- Thickness effects on strength
 - Different ASTM test methods
 - John Tomblin, Wichita State University
 - “Investigation of Thick Bondline Adhesive Joints” DOT/FAA/AR-01/33
- Variable bondline effects
 - Length and width tapers
 - Yuqiao Zhu and Keith Kedward, University of California Santa Barbara
 - “Methods of Analysis & Failure Predictions for Adhesively Bonded Joints of Uniform and Variable Thickness”, to be published




Shear Strength Results vs Bondline Thickness

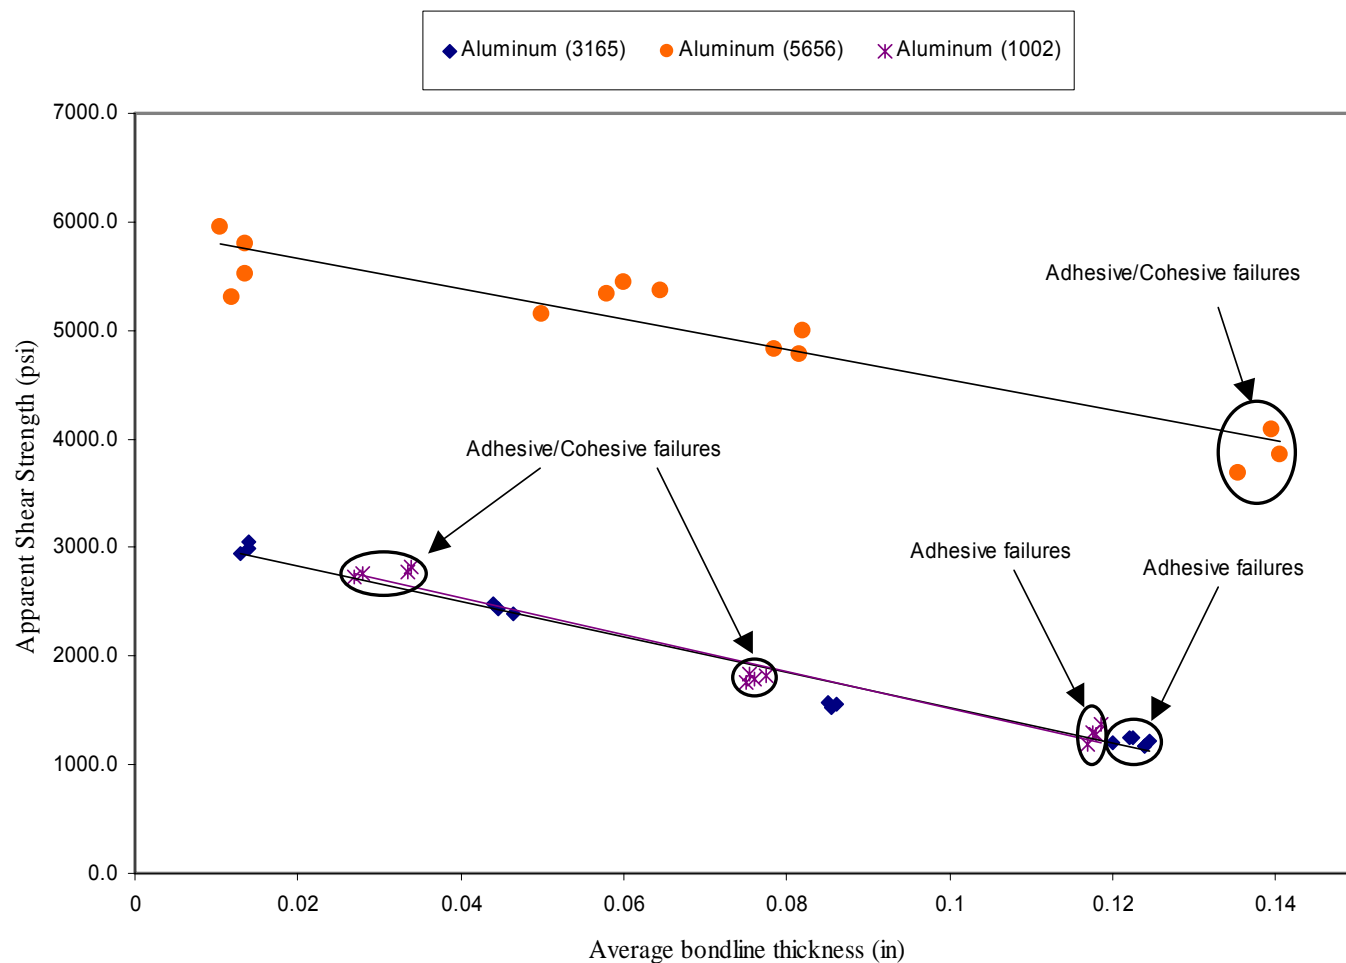




Bondline Thickness Effects

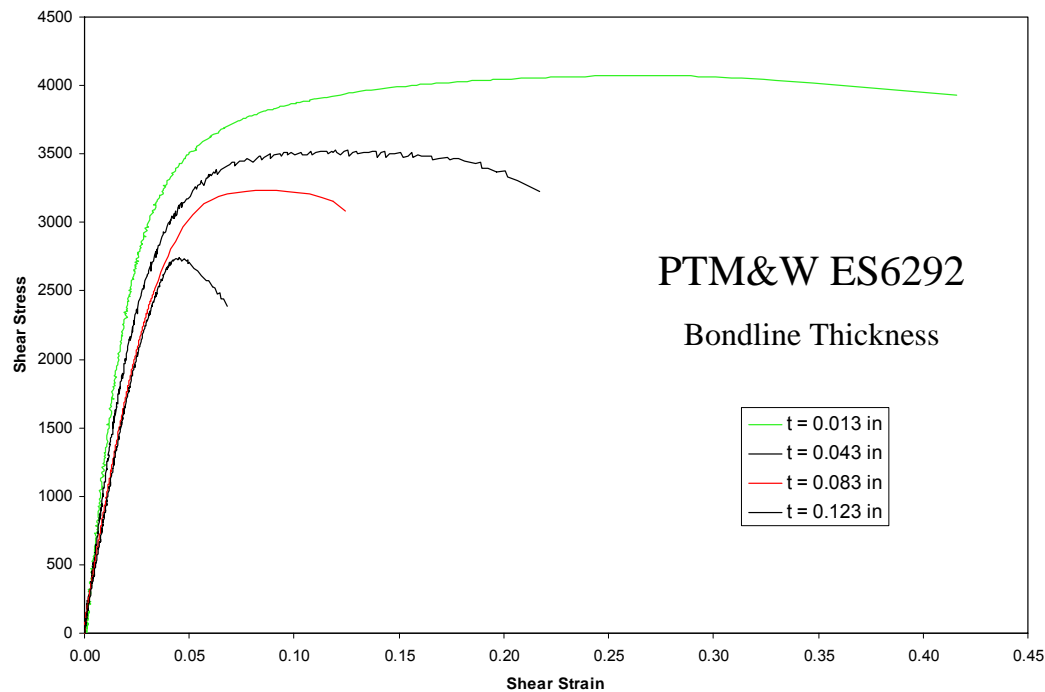

- Increasing bondline thickness resulted in reduced plastic strain and lower yield stress




Bondline Variability Effects

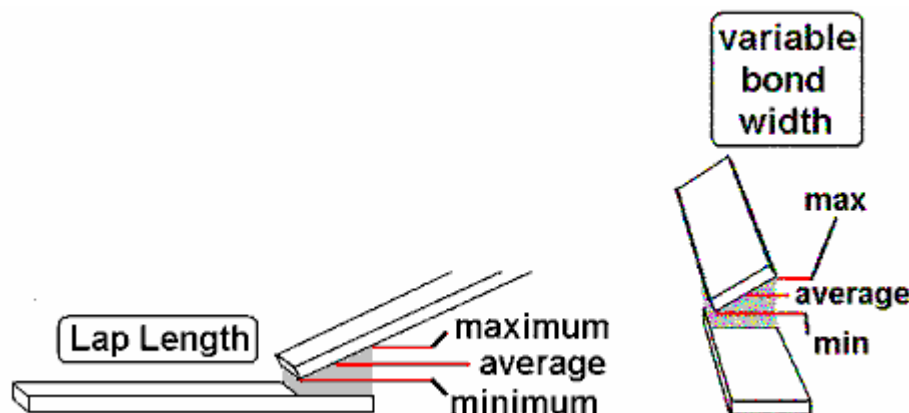

- Average thickness varied from 0.012 to 0.024 inches
- Minimum thickness varied from 0.0035 to 0.0155 inches
- Maximum thickness varied from 0.0205 to 0.0325 inches
- Changes in thickness were ~ 0.018 from the thinnest to the thickest



Bondline Variability Effects

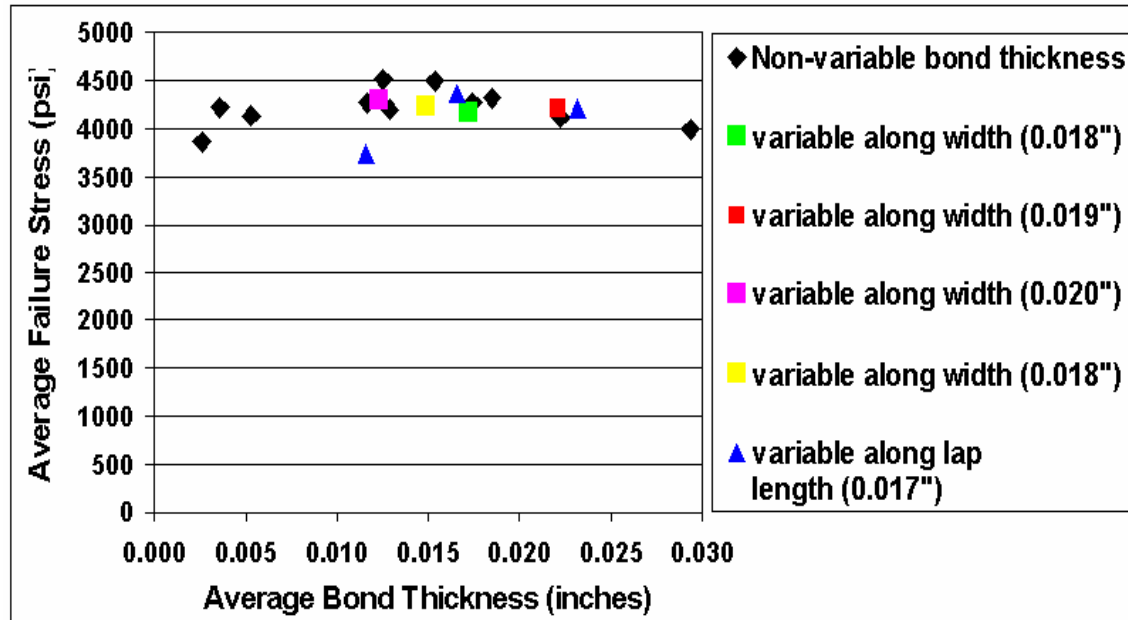

- Adhesive: DP460 (brushed), Cured at 180° F for 1 hour,
- Adherends: Titanium, tested at room temperature
- ASTM D1002-99 single lap joint




Thick and Variable Bondline Effects (continued)

- Basic understanding of the behavior of thick adhesive joints
 - Hyonny Kim and C.T. Sun, Purdue University
 - Adhesive constitutive relationships
 - Fracture criteria
- Effect of moisture on thick bondlines
 - Thomas Siegmund, Purdue University
 - Diffusivity along the bondline
 - Gradients in moisture content



Intrinsic Material Properties vs. Joint Behavior

- Understand relationship between intrinsic material properties vs. “properties” inferred from structural (joint) behavior
 - **Intrinsic** material properties should be independent of joint configuration, e.g., bondline thickness, mode of loading
- Resolve differences observed from different test methods:
 - Tensile test dogbone
 - Napkin ring
 - ASTM 5656
 - Bulk adhesive

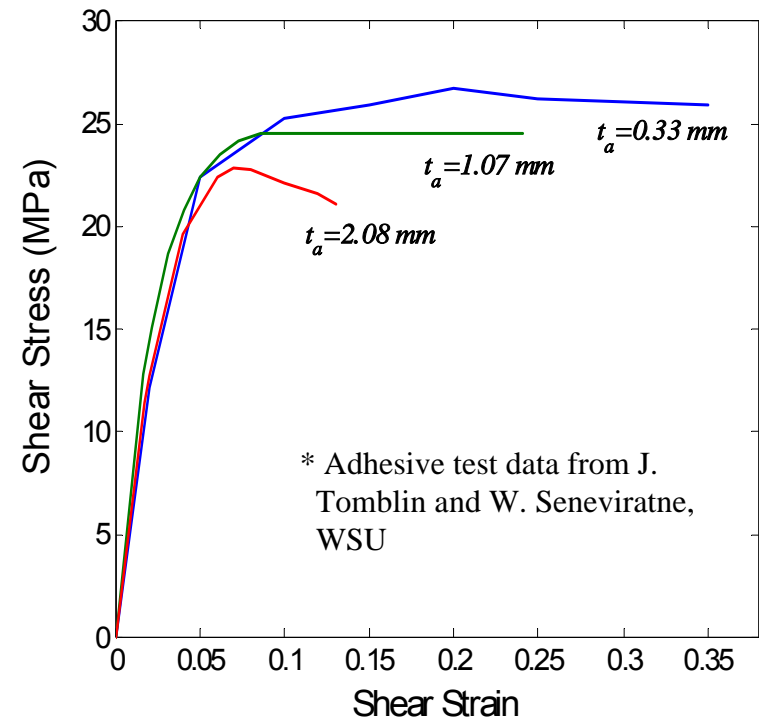





Element Testing

- Torsion beam testing
 - John Tomblin, Wichita State University
 - “Characterization of In-plane, Shear-Loaded Adhesive Lap Joints: Experiment and Analysis” DOD/FAA/AR-03/21
 - Additional tests with disbonds
- Picture frame testing
 - John Tomblin, Wichita State University
 - Disbonds



Box Beam Lap Shear Torsion Test

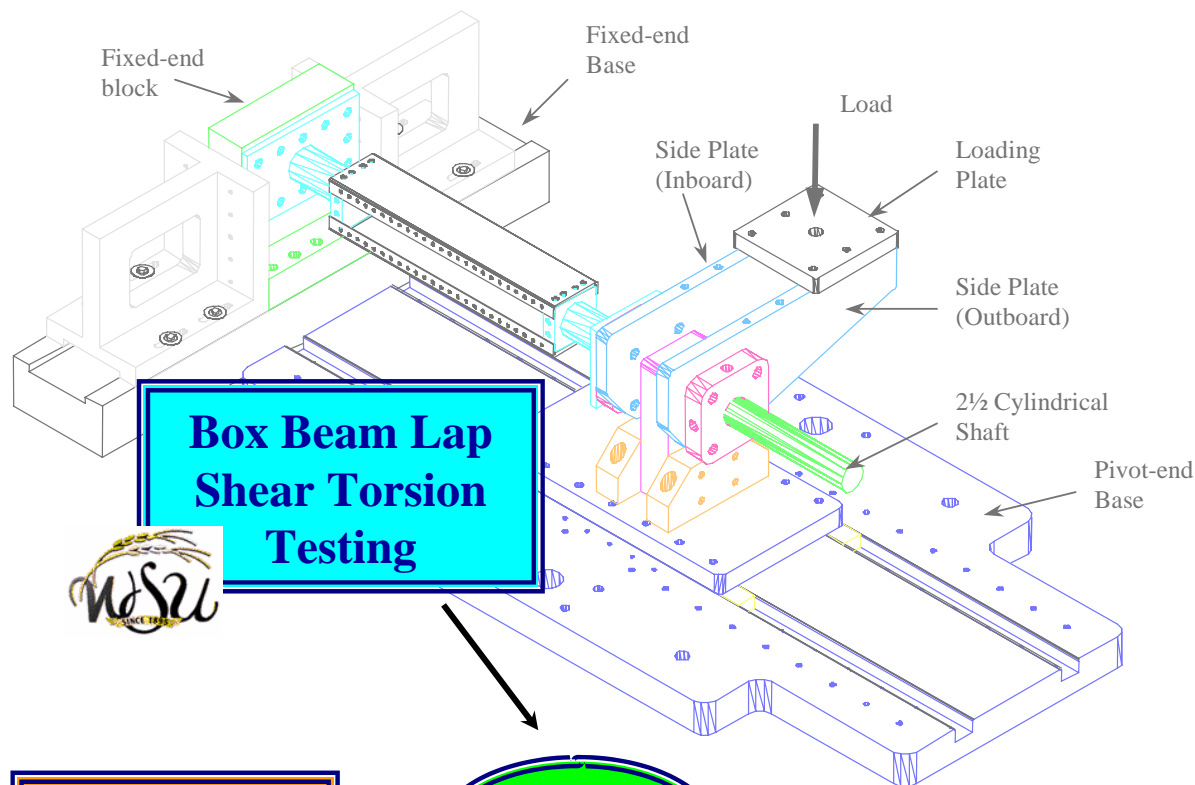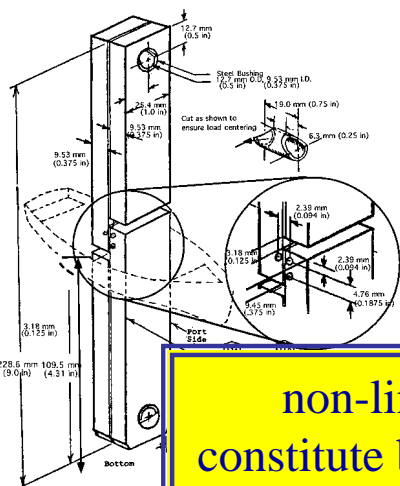

Box Beam Lap Shear Torsion Testing

non-linear
constitutive behavior
of adhesive

*Shear Loaded
Bonded Joint
(SLBJ) Theory*

Joint Failure
Prediction


Validation

**Design Guidelines &
Certification**



Box Beam Torsion Lap Shear Test – Test Setup

- Adhesive: PTM&W ES6292
- Sub-panels: NEWPORT NB321 7781
- Capacity: 56 000 in-lbs [torsion only]
- Specimen Size: 4" x 12" Lap Joint
- Axial Float is allowed to eliminate axial loads
- Measure the load perpendicular to load plate to calculate the torque

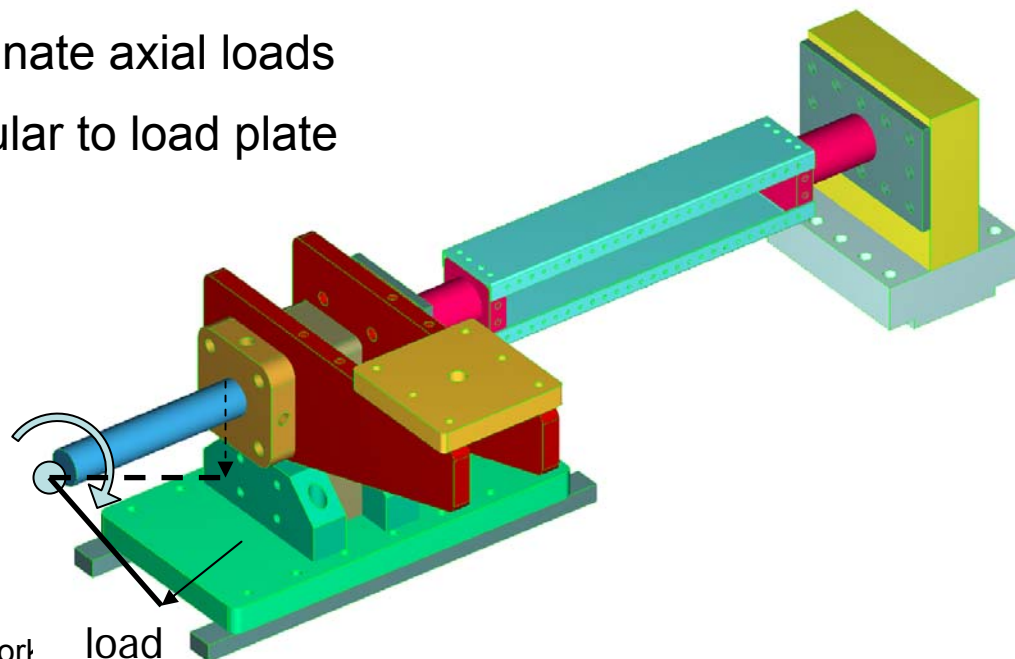




Materials

- Adhesives
 - PTM&W ES6292 [$t = 0.05'' \sim 0.20''$]
 - EA 9360 [$t = 0.10''$]
 - Loctite (CESSNA Proprietary) [$t = 0.05''$]
- Adherend
 - NEWPORT E-Glass Fabric 7781 / NB321
 - NEWPORT NB321/3K70P Carbon Cloth
 - Fiberglass/Carbon Layup Schedule – $[0_4/45/-45/0_4]$
 - Aluminum 2024-T3 Clad
 - Phosphorus Anodized & Bond Primed
[CESSNA Aircraft, Wichita, Kansas]



Adhesive Lap Joint Specimen

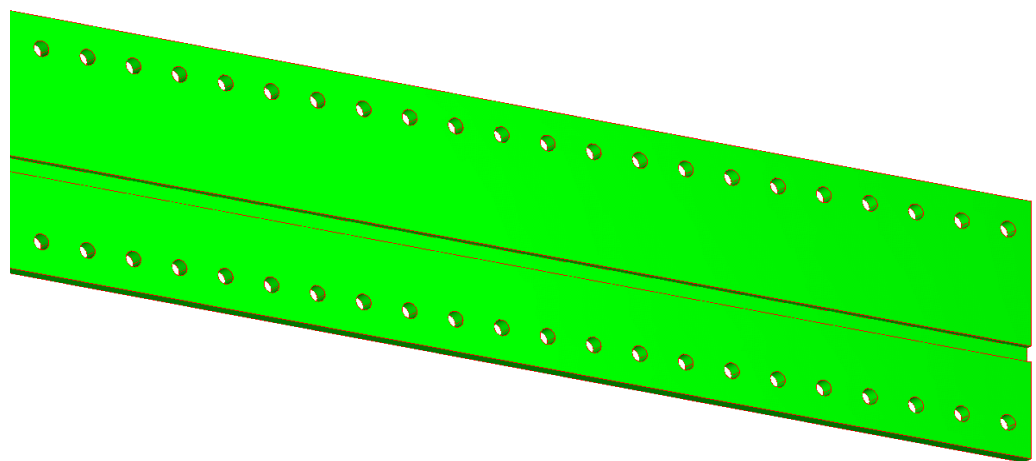

Gage width ~ 0.5"

Gage section ~ 17.25"

Flat Joint

PTM&W


EA9360

Loctite

Joggle Joint

PTM&W

EA9360

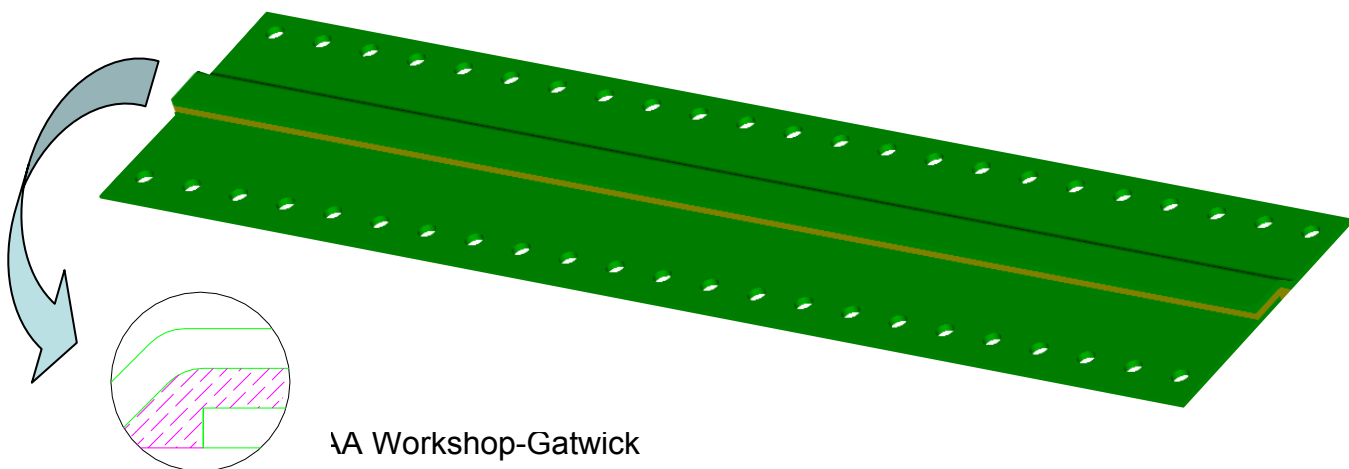


26 October 2004

AA Workshop-Gatwick



Test Results

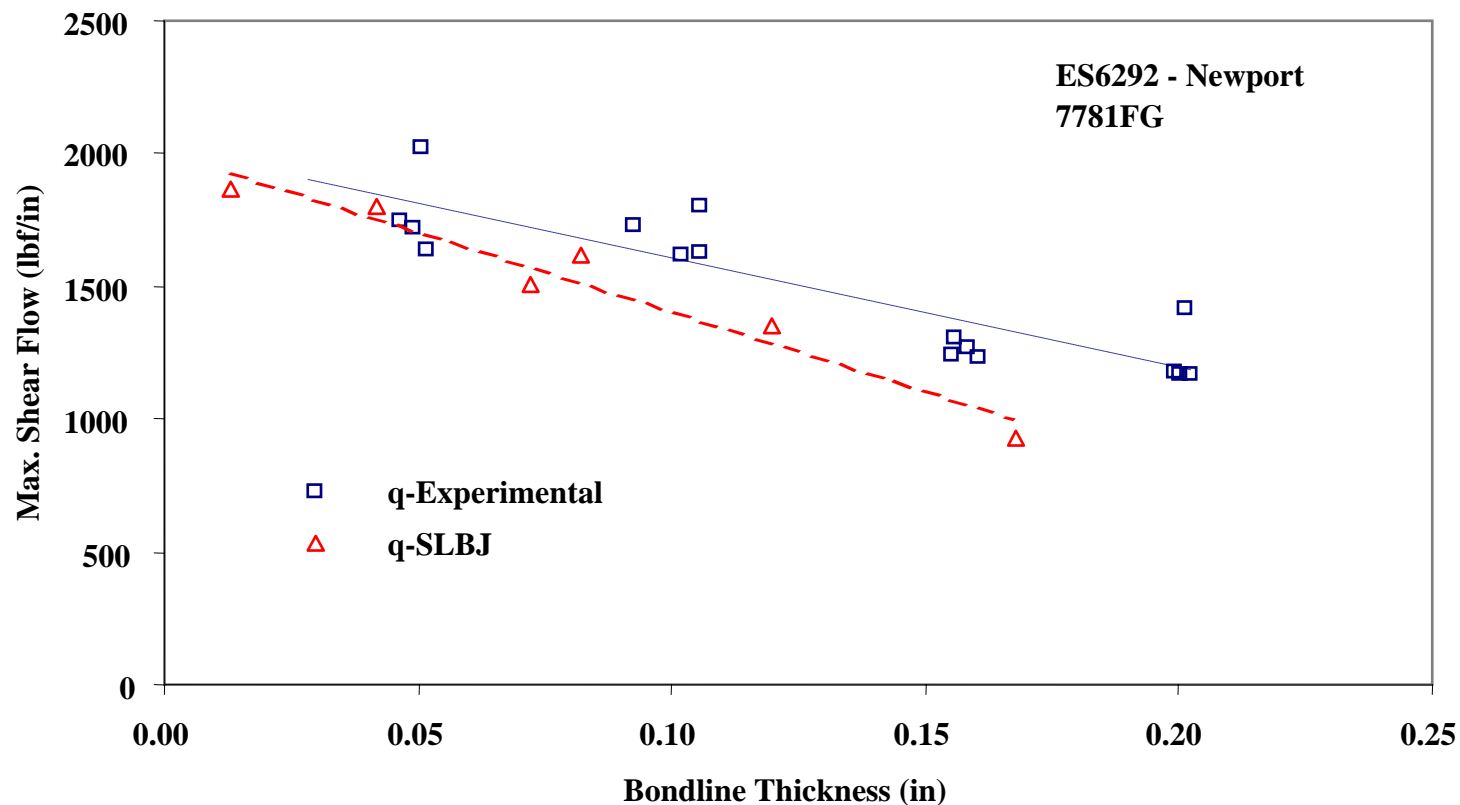

Constitutive behavior for
0.20 was not available




Box Beam Lap Shear Torsion Conclusions

- Load carrying capabilities of adhesive joints decreases as bondline thickness increases, the reduction being the same as for small test coupons
- Purdue Analysis predictions comparable with box beam test results
- Increasing bondline thickness affects the failure mode of bonded joints
- Accumulation of large plastic strains in thin bondlines resulted in high adherend interlaminar strains and caused substrate (first-ply) failure
- Unstable damage development of thick bondlines (lower plastic strain development) resulted in adhesive cracking in multiple locations with a cohesive type failure and lower failure strengths



Full-Scale Behavior Including Damage Tolerance


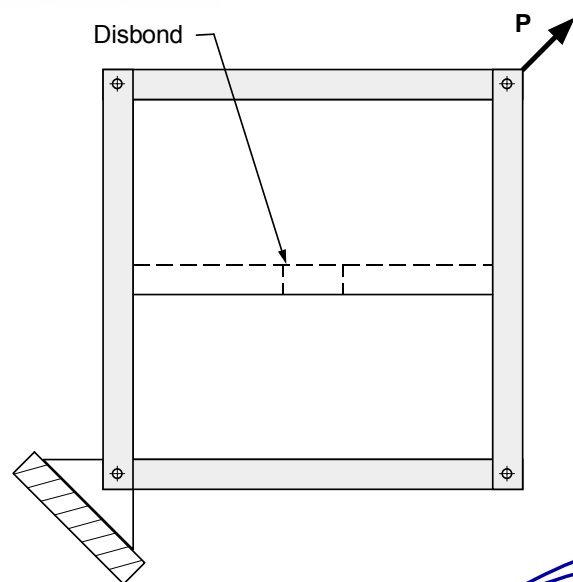


Path to get from Coupons & Elements to Full Scale Component Level

Understand
Experimental Data

???
Other Factors

Refined Models:
Adhesive Plasticity, Peel Stress
Failure Under Multiaxial Stress,
Fracture Mechanics

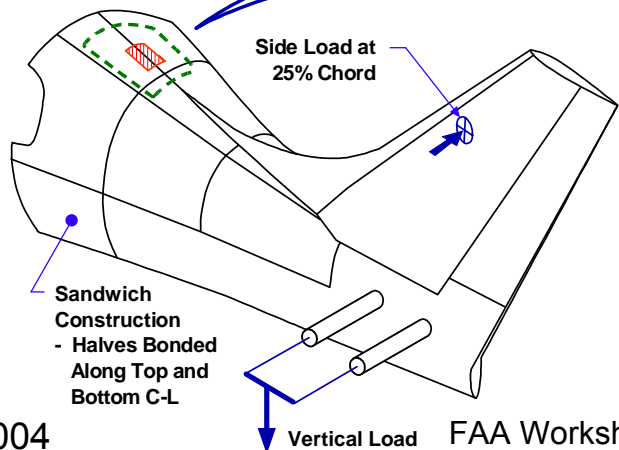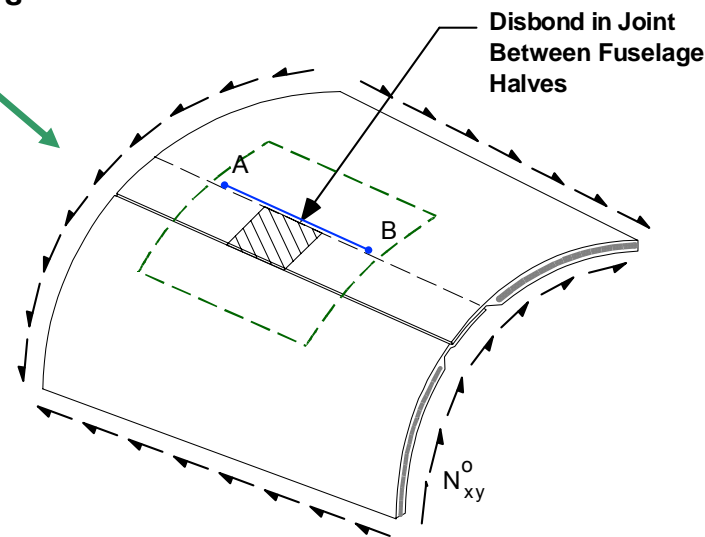


Develop predictive models:
maintain balance between
simplicity and complexity



Effects of Defects



- Variable bondline thickness
- Disbonds/Flaws
 - Effects of different disbond geometries
 - Effectiveness of fasteners to provide fail safety and to prevent catastrophic unzipping of bonds
- Low-velocity impact damages
 - Different impactor diameters
 - Different gage lengths
 - Bondline thicknesses
- Wichita State University

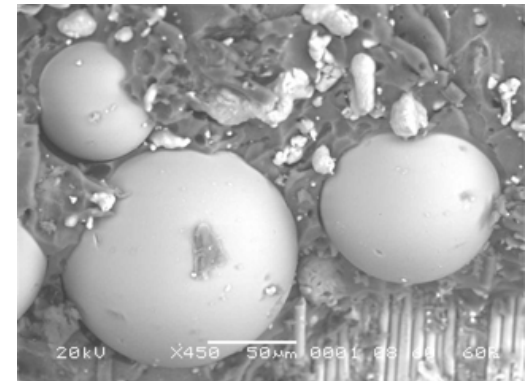



Element Testing

Box Beam Torsion

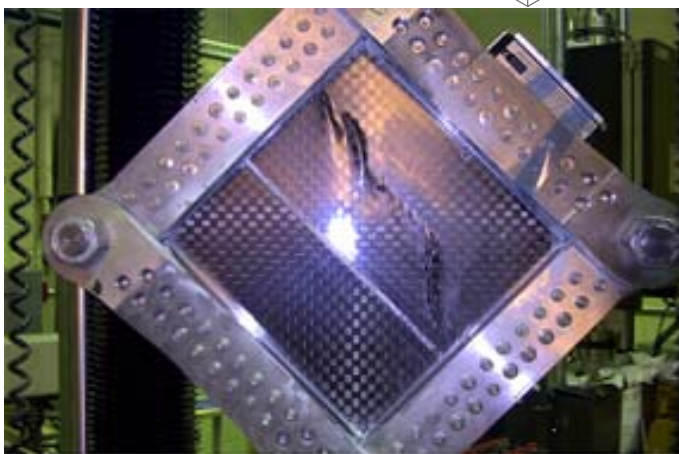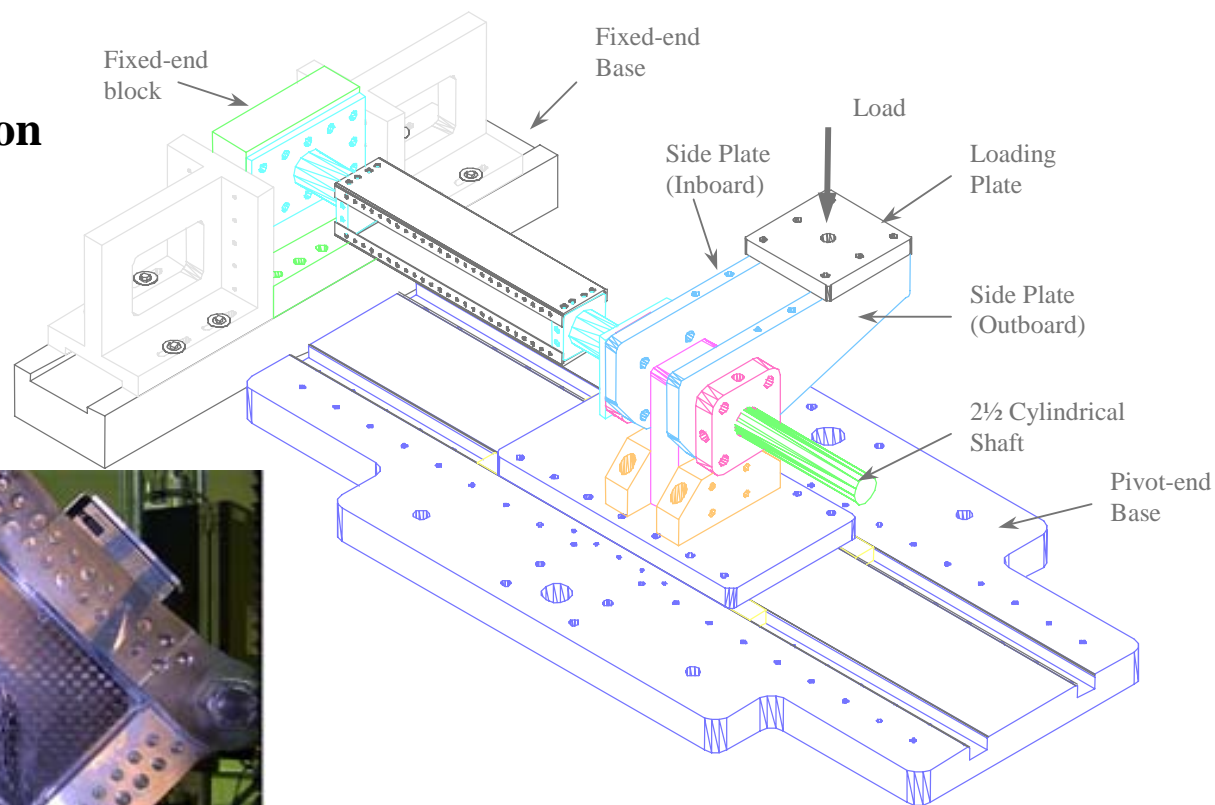


Picture Frame



Picture Frame Shear

- 11.5 x 11.5 –inch test section
- Full-field strain-displacement techniques to detect damage growth

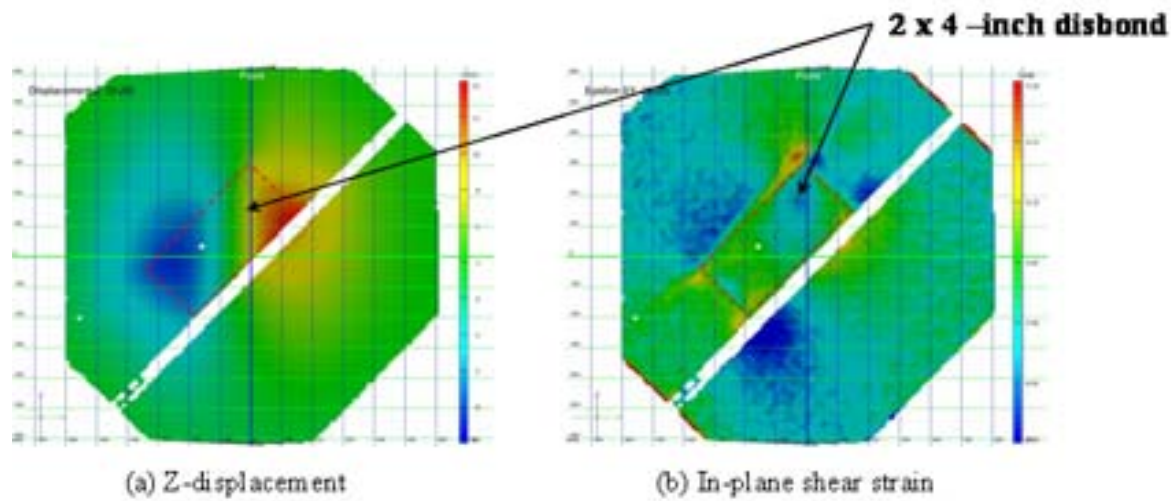



Program Results

- There is a decrease in strength for thicker bondlines
- Adhesive strength as a function of environment is highly dependent on glass transition temperature
- Characterized shear stress-strain response of 18 adhesives that can be used by industry for design and analysis and for FAA personnel in certification
- ASTM D5656 is recommended for adhesive characterization
- Thin adherend methods should only be used for quality control
- Taxonomy of peel and release plies has been agreed upon and will be documented in MIL-HDBK-17
- Mechanical tests to determine whether a good bond exists are cumbersome and unreliable - the industry must turn to chemical characterization
- Reports are available at <http://actlibrary.tc.faa.gov>