

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

AMSC N/A

REVIEWER ACTIVITIES:
ARMY - AV, ER, ME, MI
AIR FORCE - 82
DLA - IS

USER ACTIVITIES:
ARMY - AT
NAVY - AS, MC

P.A.
NAVY - OS
Other Cust
ARMY - AR
AIR FORCE - 99

PROCUREMENT SPECIFICATION
MIL-R-21248

INTERNATIONAL
INTEREST

SUPERSEDES:

TITLE

RING, RETAINING, EXTERNAL, BASIC
(TAPERED SECTION TYPE)

MS9012 (ASG) AND MS9013 (ASG)

MILITARY STANDARD
MS16624

PAGE 1 OF 9

DD FORM 1 MAY 73 672-1 (COORDINATED)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5365-0140

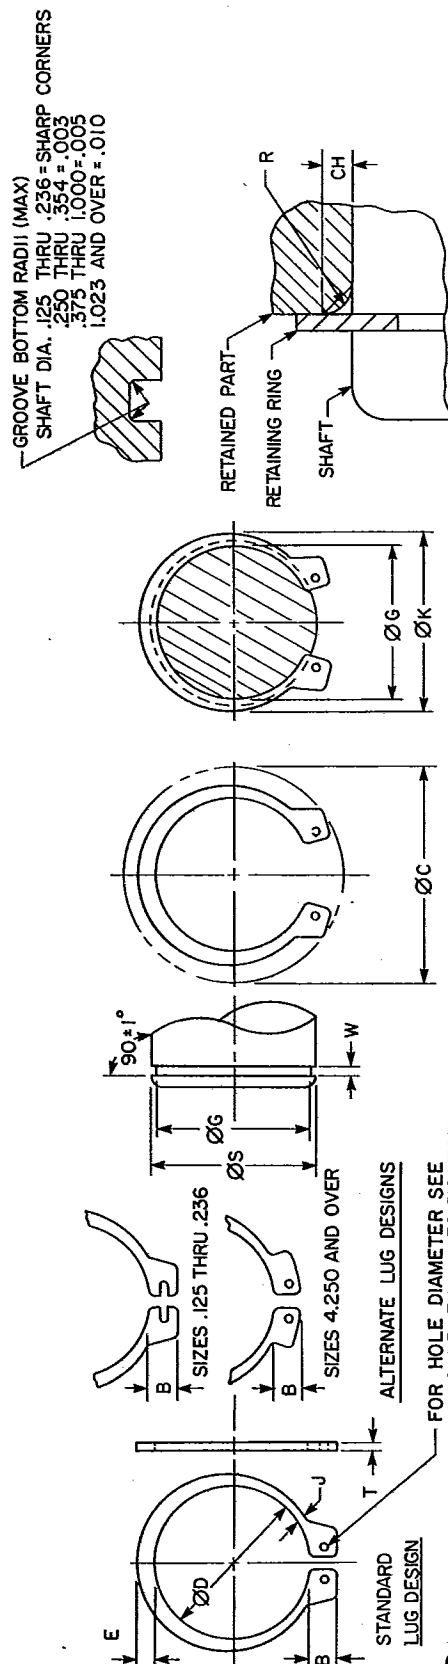


TABLE 1. DIMENSIONS

Ø S SHAFT (REF)	Ø D FREE	B LUG HEIGHT	E LARGE SECTION HEIGHT	J SMALL SECTION HEIGHT	THICKNESS T	Ø G RECOMMENDED GROOVE	W WIDTH	Ø K 3/ CLEAR	R 5/ OF RETAINED PART (REF)	CH 5/ MAX
INCH	MM	BASIC	TOL	BASIC	TOL	BASIC	TOL	BASIC	TOL	MAX
.125	3.2	.112	±.0015	.011	±.0015	.010	±.001	.148	.010	.006
.156	4.0	.142	.026	.016	.016	.010		.189	.015	.009
.188	4.8	.168	.025	.016	.016	.015		.218	.014	.008
.197	5.0	.179	±.002	.016	±.002	.015		.229	.014	.009
.219	5.6	.196	.028	.017	.017	.015		.252	.015	.009
.236	6.0	.215	.030	.019	.019	.015		.272	.016	.010
.250	6.4	.225	.035	.025	.025	.025		.290	.018	.011
.276	7.0	.250	.035	.024	.024	.025		.315	.017	.010
.281	7.1	.256	.038	.025	.025	.025		.326	.020	.012
.312	7.9	.281	.040	.026	.026	.025		.357	.020	.012
.344	8.7	.309	.042	.026	.026	.025		.390	.021	.012
.354	9.0	.320	.046	.029	.029	.025		.405	.023	.014
.375	9.5	.338	.050	.030	.030	.025		.433	.026	.015
.394	10.0	.354	.052	.031	.031	.025		.452	.027	.016
.406	10.3	.366	.054	.033	.033	.025		.468	.028	.017
.438	11.1	.395	.055	.033	.033	.025		.501	.029	.017
.469	11.9	.428	.060	.035	.035	.025		.540	.031	.018
.500	12.7	.461	.065	.040	.040	.035		.574	.034	.020
.551	14.0	.509	.053	.036	.036	.035		.610	.027	.016
.562	14.3	.521	.072	.041	.041	.035		.644	.038	.023
.594	15.1	.550	.076	.043	.043	.035		.680	.039	.023
.625	15.9	.579	.080	.045	.045	.035		.715	.041	.025
.669	17.0	.621	.082	.043	.043	.035		.756	.040	.024
.672	17.1	.621	.082	.043	.043	.035		.758	.040	.024

© ENTIRE STANDARD REVISED

APPROVED 11 DEC 1958 REVISED 24 JUNE 1969 8 NOV 1984 18 APRIL 1990

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

REVIEWER ACTIVITIES:
ARMY - AV, ER, ME, MI
AIR FORCE - 82
DLA - IS

USER ACTIVITIES:
ARMY - AT
NAVY - AS, MC

P.A.
NAVY - OS
Other Cust
ARMY - AR
AIR FORCE - 99

INTERNATIONAL
INTEREST

TITLE

RING, RETAINING, EXTERNAL, BASIC
(TAPERED SECTION TYPE)

MILITARY STANDARD

MSI6624

PROCUREMENT SPECIFICATION
MIL-R-21248

SUPERSEDES:

MS9012 (ASG) AND MS9013 (ASG)

PAGE 2 OF 9

TABLE I. DIMENSIONS - CONTINUED

Ø S SHAFT (REF)		Ø D FREE		B LOG HEIGHT		E LARGE SECTION HEIGHT		J SMALL SECTION HEIGHT		THICKNESS T ₁ /		Ø G RECOMMENDED GROOVE (REF)		W WIDTH		Ø K 3/ CLEAR		R 5/ OF RETAINED PART (REF)		FED SUP CLASS 5365	
INCH	MM	Ø D		B		E		J		THICKNESS		Ø G		W		Ø K 3/ CLEAR		R 5/ OF RETAINED PART (REF)		FED SUP CLASS 5365	
		BASIC	TOL	BASIC	TOL	BASIC	TOL	BASIC	TOL	BASIC	TOL	BASIC	TOL	BASIC	TOL	BASIC	TOL	BASIC	TOL	BASIC	TOL
.688	17.5	.635		.136		.084		.048		.042		.646		.047		.779		.042			
.750	19.0	.693		.136		.092		.051		.042		.704		.047		.850		.046			
.781	19.8	.722		.136		.094		.052		.042		.733		.047		.883		.047			
.812	20.6	.751	+.005	.136		.096	+.005	.054	±.005	.042		.762	±.003	.047		.914		.047			
.875	22.2	.810	-.010	.137		.104		.057		.042		.821		.047		.987		.051			
.938	23.8	.867		.166		.110		.063		.042		.882	FIN 2/ ±.004	.047		1.054		.055			
.984	25.0	.910		.167		.114		.064		.042		.926		.047		1.106		.056			
1.000	25.4	.925		.167		.116		.065		.042		.940		.047		1.122		.057			
1.023	26.0	.946		.168		.118		.066		.042		.961		.047		1.147		.058			
1.062	27.0	.982		.181		.122		.069		.050		.998		.056		1.192		.060			
1.125	28.6	1.041		.182		.128		.071		.050		1.059		.056		1.261		.063			
1.188	30.2	1.098		.182		.132		.072		.050		1.118		.056		1.325		.064			
1.250	31.7	1.156		.183	±.004	.140		.076		.050		1.176	.005	.056		1.396		.068			
1.312	33.3	1.214		.183		.146		.076		.050		1.232	FIN 2/ ±.004	.056		1.458		.068			
1.375	34.9	1.272		.184		.152		.082		.050		1.291		.056		1.529		.072			
1.438	36.5	1.333		.184		.160		.086		.050		1.350		.056		1.600		.076			
1.500	38.1	1.387		.214		.168	±.006	.091	±.006	.050		1.406		.056		1.668		.079			
1.562	39.7	1.446		.235		.172		.093		.062		1.468		.068		1.740		.082			
1.625	41.3	1.503		.235		.180		.097		.062		1.529		.068		1.812		.087			
1.688	42.9	1.560		.235		.184		.099		.062		1.589	±.005	.068		1.877		.090			
1.750	44.4	1.618	+.013	.237		.188		.101		.062		1.650	.005	.068		1.945		.091			
1.772	45.0	1.637	-.020	.237		.190		.102		.062		1.669	FIN 2/ ±.005	.068		1.967		.092			
1.812	46.0	1.675		.238		.192		.102		.062		1.708		.068		2.010		.092			
1.875	47.6	1.735		.239		.196		.104		.062		1.769		.068		2.076		.094			
1.969	50.0	1.819		.245		.200		.106		.062		1.857		.068		2.170		.094			
2.000	50.8	1.850		.239		.204		.108		.062		1.886		.068		2.205		.096			
2.062	52.4	1.906		.266		.208		.111		.078		1.946		.086		2.275		.098			
2.125	54.0	1.964		.266		.212		.113		.078	±.003	2.003		.086		2.337		.098			
2.156	54.8	1.993	+.015	.266		.212		.113		.078		2.032		.086		2.366		.097			
2.250	57.1	2.081	-.025	.267		.220		.116		.078		2.120		.086		2.466		.100			
2.312	58.7	2.139		.267		.222		.118		.078		2.178	±.006	.086		2.528		.100			
2.375	60.3	2.197		.267		.224	±.007	.119	±.007	.078		2.239		.086		2.591		.100			
2.438	61.9	2.255		.268		.228		.120		.078		2.299	FIN 2/ ±.006	.086		2.657		.102			
2.500	63.5	2.313		.268		.232		.122		.078		2.360		.086		2.724		.104			
2.559	65.0	2.377		.268		.238		.125		.078		2.419		.086		2.792		.108			
2.625	66.7	2.428		.268		.242		.127		.078		2.481		.086		2.860		.109			
2.688	68.3	2.485	+.020	.268		.246		.129		.078		2.541		.086		2.926		.111			
2.750	69.8	2.543	-.030	.310		.248		.131		.093		2.602		.103		2.992		.112			
2.875	73.0	2.659		.308		.256		.133		.093		2.721		.103		3.122		.115			

APPROVED 11 DEC 1958 REVISED 11 DEC 1958 (C) FOR CHANGES SEE PAGES 1 THRU 9

USER ACTIVITIES:
ARMY - AT
NAVY - AS, MC

REVIEWER ACTIVITIES:
ARMY - AV, ER, ME, MI
AIR FORCE - 82
DLA - IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense.
Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

FED. SUP CLASS
5365

TABLE 1. DIMENSIONS - CONTINUED

Ø S SHAFT (REF)	Ø D FREE		B LIK HEIGHT		E LARGE SECTION HEIGHT		J SMALL SECTION HEIGHT		THICKNESS		Ø G RECOMMENDED GROOVE (REF)		W WIDTH		Ø K 3/ CLEAR		R 5/ CH 5/ OF RETAINED PART (REF)	
	INCH	MIL	BASIC	TOL	BASIC	TOL	BASIC	TOL	BASIC	TOL	BASIC	TOL	BASIC	TOL	BASIC	TOL	BASIC	TOL
2.938	74.6	2.717	.308		.260	±.007	.136	±.007	.093		2.779		.103		3.187		.116	.070
3.000	76.2	2.775	.308		.264		.136		.093		2.838		.103		3.252		.117	.070
3.062	77.8	2.832	.298		.252		.131		.093		2.898		.103		3.294		.107	.064
3.125	79.4	2.892	.308		.272		.141		.093		2.957		.103		3.383		.120	.072
3.156	80.2	2.920	.308		.274		.143		.093		2.986		.103		3.415		.120	.072
3.250	82.0	3.006	.308		.280	±.008	.145		.093		3.076		.103		3.515		.123	.074
3.346	85.0	3.092	.308		.286		.147		.093		3.166		.103		3.613		.126	.076
3.438	87.3	3.179	.308		.292		.148	±.008	.093		3.257		.103		3.712		.129	.077
3.500	88.9	3.237	.328		.285		.148		.109		3.316		.120		3.764		.122	.073
3.543	90.0	3.277	.328		.288		.149		.109		3.357	±.006	.120		3.809		.123	.074
3.625	92.0	3.352	.328		.296		.153		.109		3.435	±.006 2/ FIM 2/	.120		3.898		.127	.076
3.688	93.7	3.410	.330		.302		.156		.109		3.493		.120		3.966		.129	.078
3.750	95.2	3.468	.332		.310		.160		.109		3.552		.120		4.037		.133	.080
3.875	98.4	3.584	.330		.318		.163		.109		3.673		.120		4.169		.137	.082
3.938	100.0	3.642	.342		.318		.163		.109		3.734		.120		4.230		.137	.082
4.000	101.6	3.700	.352		.318		.163		.109		3.792		.120		4.288		.135	.081
4.250	108.0	3.989	.395		.318		.176		.109		4.065		.120		4.558		.146	.088
4.375	111.1	4.106	.395		.318		.181		.109		4.190		.120		4.683		.146	.088
4.500	114.3	4.223	.404		.285		.128		.109		4.310		.120		4.730		.102	.061
4.750	120.6	4.458	.429		.303	±.010	.136		.109		4.550		.120		4.996		.115	.069
5.000	127.0	4.692	.450		.360		.134		.109		4.790		.120		5.346		.165	.099
5.250	133.3	4.927	.472		.372		.211		.125		5.030	±.007	.139		5.605		.169	.101
5.500	139.7	5.162	.497		.390		.209		.125		5.265		.139		5.867		.175	.105
5.750	146.0	5.396	.518		.408		.220		.125		5.505	±.006 2/ FIM 2/	.139		6.134		.184	.110
6.000	152.4	5.631	.540		.381		.171		.125		5.745		.174		6.302		.143	.086
6.250	158.7	5.866	.561		.396		.176		.156		5.985		.174		6.568		.148	.089
6.500	165.1	6.100	.586		.438		.236		.156		6.225		.174		6.905		.191	.114
6.750	171.4	6.335	.608		.456		.246		.156		6.465	±.008	.174		7.172		.200	.120
7.000	177.8	6.570	.530		.474	±.015	.256		.156		6.705		.174		7.439		.208	.125
7.500	190.5	7.009	.676		.507		.277	±.015	.187		7.180	±.006 2/ FIM 2/	.209		7.963		.220	.132
8.000	203.2	7.478	.735		.540		.294		.187		7.660		.209		8.493		.235	.141
8.500	215.9	7.947	.735		.573		.314		.187		8.140		.209		9.023		.250	.150
9.000	228.6	8.415	.735		.609		.333		.187		8.620		.209		9.557		.267	.160
9.500	241.3	8.885	.735		.642		.350		.187		9.100		.209		10.086		.281	.168
10.000	254.0	9.355	.735		.675		.367		.187		9.575		.209		10.610		.294	.176

FOR FOOTNOTES SEE PAGE 4

P.A.
NAVY - OS
Other Cust
ARMY - AR
AIR FORCE - 99

INTERNATIONAL
INTEREST

TITLE

RING, RETAINING, EXTERNAL, BASIC
(TAPERED SECTION TYPE)

MILITARY STANDARD

MSI6624

PROCUREMENT SPECIFICATION
MIL-R-21248

SUPERSEDES:

MS9012 (ASG) AND MS9013 (ASG)

PAGE 3 OF 9

FED. SUP CLASS
5365

- 1/ T - THICKNESS "t" APPLIES TO UNPLATED RINGS. FOR CORROSION RESISTANT STEEL AND PLATED RINGS, +.002 SHOULD BE ADDED TO THE MAXIMUM TOLERANCE, I.E. $\pm .002$ SHOULD BE $+.004/-0.002$.
- 2/ FIM - (FULL INDICATOR MOVEMENT) IS THE MAXIMUM ALLOWABLE DEVIATION OF CONCENTRICITY BETWEEN THE GROOVE AND THE SHAFT.
- 3/ K - MAXIMUM DIAMETER WHEN THE RING IS PROPERLY SEATED IN THE GROOVE. (DESIGN REFERENCE DIMENSION).
- 4/ C - ACTUAL CLEARANCE DIAMETER WHEN THE RING IS SPRUNG OVER THE SHAFT PRIOR TO INSTALLATION INTO THE GROOVE. (DESIGN REFERENCE DIMENSION).
- 5/ R AND CH - RADII OR CHAMFERS ALLOWABLE ON PARTS TO BE RETAINED BY THE RINGS. ALLOWABLE THRUST LOADS FOR RINGS RETAINING PARTS WITH MAXIMUM CORNER RADII OR CHAMFERS ARE LISTED IN TABLE VII ON PAGE 9.

REQUIREMENTS:

1. CLASSIFICATION: RETAINING RINGS FURNISHED UNDER THIS STANDARD SHALL BE TYPE I, CLASS 2 OF THE PROCUREMENT SPECIFICATION.
2. MATERIAL: CARBON SPRING STEEL, GRADE 1060 THRU 1095 (UNS G10600 THRU G10950) IN ACCORDANCE WITH ASTM A 568 OR ASTM A 682.
CORROSION RESISTANT STEEL, IN ACCORDANCE WITH AMS 5520 (UNS S15700).
BERYLLIUM COPPER, ALLOY NUMBER 170 (UNS C17000) OR ALLOY NUMBER 172 (UNS C17200) IN ACCORDANCE WITH ASTM B 194.
3. HARDNESS:

TABLE II. HARDNESS

$\emptyset$ SHAFT (REF)	CARBON STEEL	CORROSION RESISTANT STEEL	BERYLLIUM COPPER
.125 TO .236 .250 TO .669 .688 TO 1.500 1.562 TO 3.437 3.500 & ABOVE .250 TO .812 .875 & ABOVE .250 TO 1.023 1.062 & ABOVE	68.5-73.0 HR30N 52.5-59.0 HR45N 46.0-51.0 HRC 44.0-49.0 HRC	63-69.5 HR30N 44-51 HRC	77 TO 82 HR15N 56.5 TO 62 HR30N 37 TO 43 HRC

4. PROTECTIVE FINISH OR SURFACE TREATMENT:

- a. CARBON STEEL - SHALL BE (SEE TABLE III, IV OR V):

1. CADMIUM PLATE IN ACCORDANCE WITH QQ-P-416, TYPE II, CLASS 3 OR ASTM B 696, TYPE II, CLASS 5.
2. ZINC COAT IN ACCORDANCE WITH ASTM B633, TYPE II, CLASS Fe/Zn 5 OR ASTM B 695, TYPE II, CLASS 5.
3. PHOSPHATE COAT IN ACCORDANCE WITH DOD-P-16232, TYPE 2, CLASS 2.

- b. CORROSION RESISTANT STEEL - SHALL BE CLEANED, DESCALED AND PASSIVATED IN ACCORDANCE WITH QQ-P-35.

- c. BERYLLIUM COPPER - CADMIUM PLATE IN ACCORDANCE WITH QQ-P-416, TYPE II, CLASS 3 OR ASTM B 696, TYPE II, CLASS 5.

5. PART NUMBER: THE BASIC MS PART NUMBER IS FOLLOWED BY A DASH NUMBER TAKEN FROM TABLE III, IV OR V.

EXAMPLE: MS16624-1100 IS THE PART NUMBER FOR A CARBON STEEL CADMIUM PLATE, EXTERNAL BASIC RETAINING RING FOR USE ON A 1.000 SHAFT DIAMETER.

NOTES:

1. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES.
2. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.
3. REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.

APPROVED 11 DEC 1958 REVISED © FOR CHANGES SEE PAGES I THRU 9

P.A. NAVY-OS Other Cust ARMY-AR AIR FORCE-99	INTERNATIONAL INTEREST	TITLE RING, RETAINING, EXTERNAL, BASIC (TAPERED SECTION TYPE)	MILITARY STANDARD MS16624
PROCUREMENT SPECIFICATION MIL-R-21248	SUPERSEDES: MS9012 (ASG) AND MS9013 (ASG)	PAGE 4	OF 9

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

REVIEWER ACTIVITIES:
ARMY - AV, ER, ME, MI
AIR FORCE - 82
DLA - IS

USER ACTIVITIES:
ARMY - AT
NAVY - AS, MC

TABLE III. DASH NUMBERS FOR MS16624

[illegible]

^{1/} SUBSTITUTE CORROSION RESISTANT STEEL WHEN USED IN FOOD PROCESSING MACHINERY, OR IN FUEL OR LUBRICATION SYSTEMS, OR WHEN USED AT TEMPERATURES OVER 450°F (233°C).

P.A.
NAVY - OS
Other Cust
ARMY - AR
AIR FORCE - 99

INTERNATIONAL
INTEREST

RING, RETAINING, EXTERNAL, BASIC
(TAPERED SECTION TYPE)

PROCUREMENT SPECIFICATION
MIL-R-21248

SUPERSEDES: MS9012 (ASG) AND MS9013 (ASG)

MILITARY STANDARD
MS16624

PAGE 5 OF 9

REVIEWER ACTIVITIES:
ARMY - AV, ER, ME, MI
AIR FORCE - 82
DLA - IS

USER ACTIVITIES:
ARMY - AT
NAVY - AS, MC

P.A.
NAVY - OS
Other Cust
ARMY - AR
AIR FORCE - 99

INTERNATIONAL
INTEREST

TITLE

RING, RETAINING, EXTERNAL, BASIC
(TAPERED SECTION TYPE)

MILITARY STANDARD

MSI6624

PROCUREMENT SPECIFICATION
MIL-R-21248

SUPERSEDES

MS9012 (ASG) AND MS9013 (ASG)

PAGE OF
6 9

TABLE IV. SUBSTITUTION TABLE (CROSS REFERENCES OF PART NUMBERS)

Ø S SHAFT (REF)	INACTIVE	INACTIVE	SUBST CARBON STEEL ZINC COAT	SUBST CARBON STEEL ZINC COAT	SUBST CARBON STEEL ZINC COAT	SUBST CARBON STEEL ZINC COAT	SUBST CARBON STEEL ZINC COAT	SUBST CARBON STEEL ZINC COAT	SUBST CARBON STEEL ZINC COAT	Ø S SHAFT (REF)
MS9013	MSI6624	MSI6624	MSI6624	MSI6624	MSI6624	MSI6624	MSI6624	MSI6624	MSI6624	MSI6624
01	25	1025	2025	1025	1125	2125	3125	3125	3125	3.125
02	27	1027	2027	1131	1131	2131	3131	3131	3131	3.125
03	28	1028	2028	1137	1137	2137	3137	3137	3137	3.125
04	31	1031	2031	1143	1143	2143	3143	3143	3143	3.346
05	34	1034	2034	1150	1150	2150	3150	3150	3150	3.346
06	35	1035	2035	1156	1156	2156	3156	3156	3156	3.346
07	37	1037	2037	1162	1162	2162	3162	3162	3162	3.500
08	39	1039	2039	1168	1168	2168	3168	3168	3168	3.500
09	40	1040	2040	1175	1175	2175	3175	3175	3175	3.500
10	43	1043	2043	1177	1177	2177	3177	3177	3177	3.543
11	46	1046	2046	1181	1181	2181	3181	3181	3181	3.543
12	50	1050	2050	1187	1187	2187	3187	3187	3187	3.543
13	55	1055	2055	1196	1196	2196	3196	3196	3196	3.625
14	56	1056	2056	1200	1200	2200	3200	3200	3200	3.625
15	59	1059	2059	1206	1206	2206	3206	3206	3206	3.625
16	62	1062	2062	1212	1212	2212	3212	3212	3212	3.750
17	66	1066	2066	1215	1215	2215	3215	3215	3215	3.750
18	68	1068	2068	1225	1225	2225	3225	3225	3225	3.750
19	75	1075	2075	1231	1231	2231	3231	3231	3231	3.875
20	78	1078	2078	1243	1243	2243	3243	3243	3243	3.875
21	81	1081	2081	1250	1250	2250	3250	3250	3250	4.000
22	87	1087	2087	1255	1255	2255	3255	3255	3255	4.000
23	93	1093	2093	1262	1262	2262	3262	3262	3262	4.250
24	98	1098	2098	1268	1268	2268	3268	3268	3268	4.250
25	100	1100	2100	1275	1275	2275	3275	3275	3275	4.375
26	102	1102	2102	1287	1287	2287	3287	3287	3287	4.500
27	106	1106	2106	1293	1293	2293	3293	3293	3293	4.500
28	112	1112	2112	1300	1300	2300	3300	3300	3300	4.500
29	118	1118	2118	1306	1306	2306	3306	3306	3306	4.500

1/ SUBSTITUTE CORROSION RESISTANT STEEL WHEN USED IN FOOD PROCESSING MACHINERY, OR IN FUEL OR LUBRICATION SYSTEMS, OR WHEN USED AT TEMPERATURES OVER 450°F (233°C).

FED. SUP CLASS
5365

APPROVED 11 DEC 1958 REVISED © FOR CHANGES SEE PAGES 1 THRU 9

TABLE V. SUBSTITUTION TABLE (CROSS REFERENCE OF PART NUMBERS)

Ø s SHAFT (REF)	INACTIVE	INACTIVE	SUBST	Ø s SHAFT (REF)	INACTIVE	SUBST
	BERYLLIUM 1/ COPPER	BERYLLIUM 1/ COPPER	BERYLLIUM 1/ COPPER		BERYLLIUM 1/ COPPER CAD PLATE	BERYLLIUM 1/ COPPER CAD PLATE
	MS9012	MS16624	MS16624		MS16624	MS16624
.125	01	12	5012	.125	1012	5012-1
.156	02	15	5015	.156	1015	5015-1
.188	03	18	5018	.188	1018	5018-1
.197	04	19	5019	.197	1019	5019-1
.219	05	21	5021	.219	1021	5021-1
.236	06	23	5023	.236	1023	5023-1

1/ SUBSTITUTE CORROSION RESISTANT STEEL WHEN USED IN FOOD PROCESSING MACHINERY, OR IN FUEL OR LUBRICATION SYSTEMS, OR WHEN USED AT TEMPERATURES OVER 450°F (233°C).

RECOMMENDED DESIGN LIMITATIONS AND USAGE

- (a) INTENDED USE - TO PROVIDE SHOULDERS FOR POSITIONING AND RETAINING MACHINE COMPONENTS ON SHAFTS. TAPERED DESIGN PRINCIPLE PERMITS RINGS TO MAINTAIN PRACTICALLY CONSTANT CIRCULARITY AND PRESSURE AGAINST BOTTOM OF GROOVE, COUNTERACTING CONSIDERABLE CENTRIFUGAL FORCE (SEE TABLE VI). RINGS FOR SHAFT DIAMETERS OVER 4 INCHES ARE SPECIALLY DIMENSIONED TO MAINTAIN BALANCE IN ROTATION. THE USE OF THE FOLLOWING FORMULAS ARE BASED ON THE FACT THAT THE RING WILL NOT FAIL IN COMPRESSION.

LIMITATION ON USE - THE FOLLOWING FORMULAS ARE NOT TO BE USED FOR BRITTLE MATERIALS SUCH AS CAST IRON, ETC.

WARNING - RINGS SHOULD NOT BE OVER EXPANDED DURING INSTALLATION SINCE THIS WILL LEAD TO RING FAILURE. IF RING HAS PLAY BETWEEN THE GROOVE DIAMETER AND THE INSIDE RING DIAMETER THIS INDICATES THAT THE RING HAS BEEN OVER EXPANDED, (PROVIDING GROOVE HAS BEEN MACHINED TO RECOMMENDED DIMENSIONS).

FOR APPROXIMATE SAFETY RPM LIMITS SEE TABLE VI.

TABLE VI. APPROXIMATE SAFETY RPM LIMITS

Ø SHAFT (INCHES)		.125	.500	1	2	3	4	6	8	10
CARBON STEEL AND CORROSION RESISTANT STEEL	RPM LIMIT	80,000	40,000	20,000	10,000	6,700	5,000	3,400	2,500	2,000
BERYLLIUM COPPER	RPM LIMIT	50,000	25,000	13,000	6,400					

- (b) ALLOWABLE THRUST LOAD CAPACITY OF THE RINGS. ABUTTING COMPONENTS TO HAVE SHARP CORNERS =

$$P = \frac{11STX}{F}$$

WHERE:

P = ALLOWABLE THRUST LOAD (POUNDS)
S = SHAFT DIAMETER (INCHES)
T = RING THICKNESS (INCHES)
X = ULTIMATE SHEAR STRENGTH OF THE RING MATERIAL (PSI) 1/
F = FACTOR OF SAFETY

A SAFETY FACTOR, F = 4, IS RECOMMENDED, SINCE THE RING UNDER LOAD IS SUBJECTED NOT ONLY TO THE PURE SHEAR STRESSES, BUT ALSO TO BENDING STRESSES.

- (c) ALLOWABLE LOAD CAPACITY OF GROOVE WALL =

$$P = \frac{11SY}{F}$$

WHERE:

P = ALLOWABLE COMPRESSION LOAD (POUNDS)
S = SHAFT DIAMETER (INCHES)
d = GROOVE DEPTH (INCHES)
Y = YIELD STRENGTH IN COMPRESSION OF THE GROOVE MATERIAL (PSI)
F = FACTOR OF SAFETY

TO INSURE A SAFE WORKING LOAD, A SAFETY FACTOR, F = 2, IS RECOMMENDED.

- (d) MINIMUM DISTANCE BETWEEN OUTER GROOVE WALL AND END OF SHAFT =

$$Z = 3d$$

WHERE:

Z = MINIMUM DISTANCE BETWEEN OUTER GROOVE AND END OF SHAFT (INCHES)
d = GROOVE DEPTH (INCHES)

- 1/ X = 120,000 PSI ULTIMATE SHEAR STRENGTH FOR RINGS UP TO AND INCLUDING .672 INCH SHAFT DIAMETER OF CARBON STEEL OR CORROSION RESISTANT STEEL.
X = 150,000 PSI ULTIMATE SHEAR STRENGTH FOR RINGS .688 INCH AND OVER SHAFT DIAMETER OF CARBON STEEL OR CORROSION RESISTANT STEEL.
X = 110,000 PSI ULTIMATE SHEAR STRENGTH FOR RINGS OF ALL SHAFT DIAMETERS AND OF BERYLLIUM COPPER.

P.A. NAVY-OS Other Cust	INTERNATIONAL INTEREST	TITLE RING, RETAINING, EXTERNAL, BASIC (TAPERED SECTION TYPE)	MILITARY STANDARD MS16624
ARMY-AR AIR FORCE-99	PROCUREMENT SPECIFICATION MIL-R-21248	SUPERSEDES- MS9012 (ASG) AND MS9013 (ASG)	PAGE 7 OF 9

USER ACTIVITIES:
ARMY-AT
NAVY-AS, MC

REVIEWER ACTIVITIES:
ARMY - AV, ER, ME, MI
AIR FORCE - 82
DLA - IS

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
This military standard is approved for use by all Departments and Agencies of the Department of Defense.
Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

(e) DIFFERENTIAL ROTATION =

THE CONDITIONS UNDER WHICH A RETAINING RING MAY BE USED WHEN ADJACENT PARTS ROTATE RELATIVE TO IT, FALL INTO TWO CATEGORIES:

1. WHERE NO THRUST IS EXERTED BY ADJACENT PART; IN THIS CASE, DIFFERENTIAL ROTATION OF RING AND ADJACENT PART CREATES NO ELEMENT OF RISK IN THE APPLICATION OF THE RINGS BECAUSE NO FRICTIONAL TORQUE IS EXERTED BY THE MACHINE PART ON THE RING.
2. CONSIDERATION MUST BE GIVEN TO THE MAGNITUDE OF THE THRUST INVOLVED. THE FRICTION MOMENT MAY NOT EXCEED THE BENDING MOMENT, WHICH THE RING CAN TOLERATE WITHOUT RELEASING ITS PRESSURE AGAINST THE BOTTOM OF THE GROOVE, FORMULATED AS FOLLOWS:

$$fPN \leq \frac{sTE^2}{18}$$

OR

$$P \leq \frac{sTE^2}{f18N}$$

WHERE:

P = ALLOWABLE THRUST LOAD EXERTED BY ADJACENT PART (POUNDS)
f = COEFFICIENT OF FRICTION
s = WORKING STRESS OF RING UNDER MAXIMUM EXPANSION (PSI)^{2/}
T = RING THICKNESS (INCHES)
E = GREATEST WIDTH SECTION OF RING (INCHES)
N = NEUTRAL RING DIAMETER (INCHES), FREE DIAMETER PLUS 3/4 E DIMENSION

IN SUCH CASES WHERE DIFFERENTIAL ROTATION OCCURS, THE CALCULATION SHOULD BE BASED ON THE MAXIMUM POSSIBLE VALUE OF THE COEFFICIENT OF FRICTION.

(f) IMPACT CAPACITY OF RING OR GROOVE WALL =

$$I_R = \frac{PT}{2} - \text{FOR THE RING (INCH POUNDS), ABUTTING COMPONENTS TO HAVE SHARP CORNERS.}$$

$$I_G = \frac{Pd}{2} - \text{FOR THE GROOVE (INCH POUNDS)}$$

WHERE:

P = ALLOWABLE THRUST LOAD OF RINGS OR GROOVES (POUNDS)
T = RING THICKNESS (INCHES)
I_G = IMPACT CAPACITY OF GROOVE WALL (INCH POUNDS)
d = GROOVE DEPTH (INCHES)
I_R = IMPACT CAPACITY OF RING (INCH POUNDS)

(g) LOAD CAPACITY, WITH THE RETAINED PART RADIUS OR CHAMFERED =

WHEN THE RADIUS OR CHAMFER OF THE RETAINED PART DOES NOT EXCEED THE MAXIMUM RADIUS ALLOWED FOR THE BOTTOM OF THE RING GROOVE, THE LESSER LOAD CAPACITY COMPUTED FROM THE FORMULAS ON PAGES 7 AND 8 WILL APPLY. THE CORNER RADIUS AND CHAMFERS LISTED ON PAGES 1 THRU 3 WERE CHOSEN AS LARGE AS POSSIBLE FOR THE RING SIZES INVOLVED AND ARE RELATED TO THE MAXIMUM THRUST LOADS LISTED IN THE TABLE ON PAGE 9. IF THE CORNER RADIUS OR CHAMFERS ARE SMALLER THAN THOSE LISTED, THEN THE THRUST LOADS INCREASE PROPORTIONALLY, IN ACCORDANCE WITH THE FOLLOWING FORMULAS:

$$P^1 = \frac{P CH}{CH^1}$$

OR

$$P^1 = \frac{PR}{R^1}$$

WHERE:

P¹ = NEW ALLOWABLE THRUST LOAD
P = LISTED ALLOWABLE THRUST LOAD
CH¹ = NEW (SMALLER) CHAMFER
CH = LISTED CHAMFER
R¹ = NEW (SMALLER) CORNER RADIUS
R = LISTED CORNER RADIUS

- ^{2/} s = 250,000 PSI WORKING STRESS FOR RINGS OF CARBON STEEL OR CORROSION RESISTANT STEEL
s = 200,000 PSI WORKING STRESS FOR RINGS OF BERYLLIUM COPPER.

USER ACTIVITIES:
ARMY - AT
NAVY - AS, MC

REVIEWER ACTIVITIES:
ARMY - AV, ER, ME, MI
AIR FORCE - 82
DLA - IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

APPROVED 11 DEC 1958 REVISED © FOR CHANGES SEE PAGES 1 THRU 9

P.A. NAVY-OS Other Cust ARMY-AR AIR FORCE-99	INTERNATIONAL INTEREST	TITLE RING, RETAINING, EXTERNAL, BASIC (TAPERED SECTION TYPE)	MILITARY STANDARD MSI6624
PROCUREMENT SPECIFICATION MIL-R-21248	SUPERSEDES: MS9012 (ASG) AND MS9013 (ASG)	PAGE 8	OF 9

C5-913

FED. SUP CLASS
5365

LIMIT LOADS LISTED BELOW ARE BASED ON RINGS OF BERYLLIUM COPPER (WORKING STRESS 180,000 PSI) FOR SIZES BELOW .250 INCH AND ON RINGS OF STEEL (WORKING STRESS 250,000 PSI) FOR SIZES .250 INCH AND OVER. IF THE ALLOWABLE GROOVE CAPACITY LOADS AS CALCULATED BY USING THE FORMULA ON PAGE 7 ARE LESS, THEN THEY SHOULD BE USED.

TABLE VII. LIMIT LOADS.

NOMINAL RING SIZE		ALLOWABLE THRUST LOAD FOR RING ASSEMBLIES WITH PARTS HAVING MAXIMUM CORNER RADII OR CHAMFERS	
FROM	TO	CARBON STEEL OR CRES	BERYLLIUM COPPER
.125	.156		45 LB
.188	.236		105 LB
.250	.469	470 LB	340 LB
.500	.672	910 LB	650 LB
.688	1.023	1340 LB	950 LB
1.062	1.500	1950 LB	1400 LB
1.562	2.000	3000 LB	2100 LB
2.062	2.688	5000 LB	
2.750	3.438	7350 LB	
3.500	5.000	10500 LB	
5.250	6.000	13500 LB	
6.250	7.000	21000 LB	
7.500	10.000	30000 LB	

USER ACTIVITIES:
ARMY - AT
NAVY - AS, MC

REVIEWER ACTIVITIES:
ARMY - AV, ER, ME, MI
AIR FORCE - 82
DLA - IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A. NAVY-OS Other Cust ARMY-AR AIR FORCE-99	INTERNATIONAL INTEREST	TITLE RING, RETAINING, EXTERNAL, BASIC (TAPERED SECTION TYPE)	MILITARY STANDARD MS16624
PROCUREMENT SPECIFICATION MIL-R-21248	SUPERSEDES: MS9012 (ASG) AND MS9013 (ASG)	PAGE 9	OF 9