

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DOOSIS SPECIFIED IN THE SOLUTION MIL-1-45914

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE

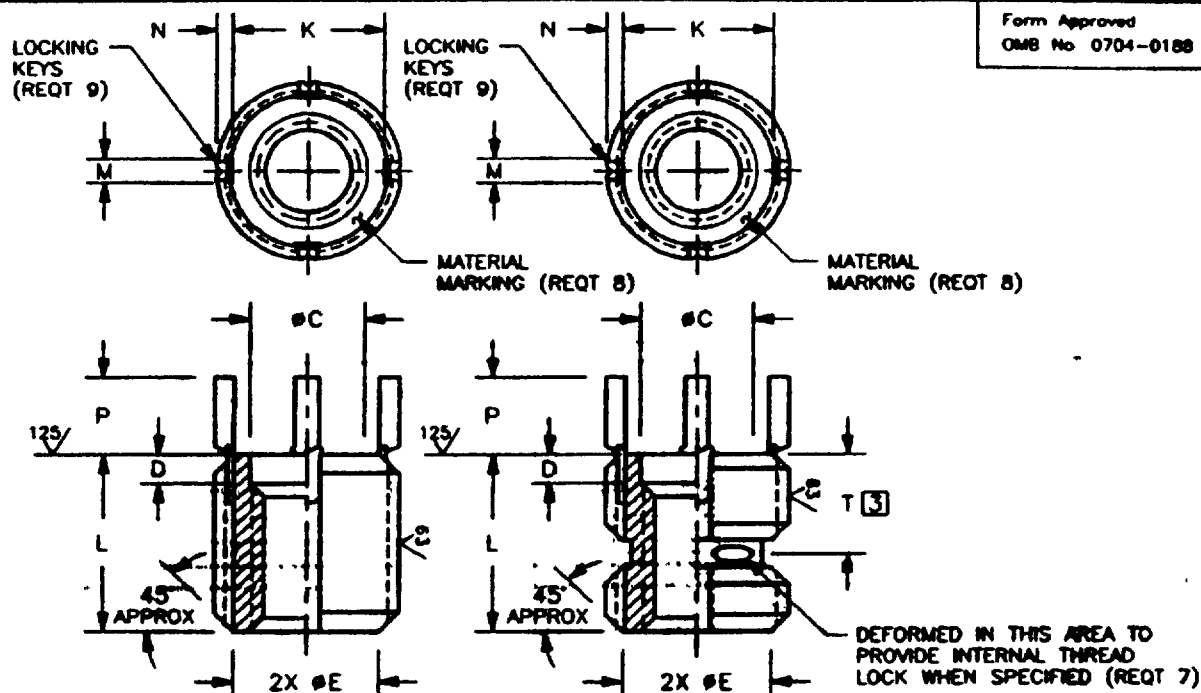


TABLE I COARSE INTERNAL THREADS

DASH NO	INTERNAL THREAD MIL-S-8679 UNJC-38	EXTERNAL THREAD FED-STD-H2B/2 EXCEPT MODIFIED MINOR DIA.		ØC	D	ØE	K	L	KEY DIMENSIONS			T
		SIZE	ØMINOR						M REF	N REF	P REF	
101	.190-24	.375-16UNC-2A	.320 .312	.196	.070	.310	.284	.312	.068	.040	.130	.220
102	.250-20	.4375-14UNC-2A	.383 .375	.257	.070	.375	.344	.375	.068	.040	.190	.220
103	.3125-18	.500-13UNC-2A	.440 .432	.316	.070	.430	.407	.437	.068	.040	.190	.220
104	.375-16	.5625-12UNC-2A	.503 .495	.380	.070	.495	.469	.500	.068	.040	.190	.250
105	.4375-14	.625-11UNC-2A	.565 .551	.445	.100	.550	.532	.625	.068	.040	.190	.280
106	.500-13	.6875-11NS-2A	.625 .615	.507	.100	.615	.595	.688	.068	.040	.190	.280
107	.5625-12	.8125-16UN-2A	.752 .744	.580	.100	.745	.720	.812	.068	.040	.190	.320
108	.625-11	.875-14UNF-2A	.815 .807	.640	.100	.805	.782	.875	.068	.040	.190	.330
109	.750-10	1.125-12UNF-2A	1.050 1.040	.763	.100	1.040	.975	1.125	.103	.070	.250	---
109L	.750-10	1.125-12UNF-2A	1.050 1.040	.763	.100	1.040	.975	1.250	.103	.070	.250	.490
110	.875-9	1.250-12UNF-2A	1.175 1.165	.888	.100	1.165	1.100	1.250	.103	.070	.250	---
110L	.875-9	1.250-12UNF-2A	1.175 1.165	.888	.100	1.165	1.100	1.375	.103	.070	.250	.490
111	1.000-8	1.375-12UNF-2A	1.300 1.290	1.015	.100	1.290	1.225	1.375	.103	.070	.250	---
111L	1.000-8	1.375-12UNF-2A	1.300 1.290	1.015	.100	1.290	1.225	1.500	.103	.070	.250	.550

(F) ENTIRE STANDARD REVISED

INCH-POUND

PREPARING ACTIVITY: ARMY-AR

CUSTOMERS: ARMY- AR NAVY- AS

AIR FORCE- 99 DIA-

REVIEW: AV, SH, 82, IS, NS

USER: AT, GL, MC

PROJECT NUMBER: 5340-2052

MILITARY SPECIFICATION SHEET

TITLE

INSERT, SCREW-THREAD,
 LOCKED IN, KEY-LOCKED,
 HEAVY DUTY

SPECIFICATION SHEET NUMBER

MS51831F 9 MAR 92

SUPERSEDING
 MS51831E 6 SEPT 85

AMSC- N/A

FSC- 5340

DISTRIBUTION STATEMENT

Δ Approved for public release, distribution is unlimited

Page 1 of 3

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODDS SPECIFIED IN THE SOLUTION. MIL-I-45914

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

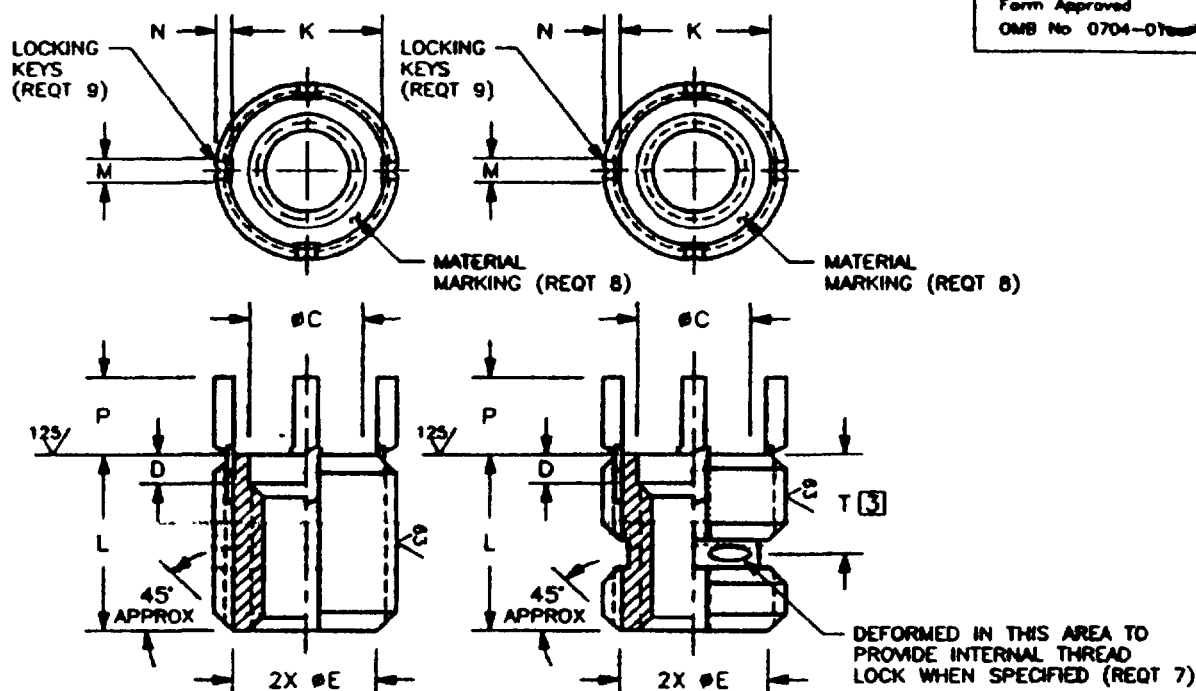


TABLE II FINE INTERNAL THREADS

DASH NO.	INTERNAL THREAD MIL-S-8879 UNJF-3B	EXTERNAL THREAD FED-STD-H28/2 EXCEPT MODIFIED MINOR DIA.		ØC	D	ØE	K	L	KEY DIMENSIONS			T
		SIZE	Ø MINOR	±.005	±.010	REF	REF	±.015	M REF	N REF	P REF	±.030
201	.190-32	.375-16UNC-2A	.320 .312	.196	.070	.310	.284	.312	.068	.040	.130	.220
202	.250-28	.4375-14UNC-2A	.383 .375	.257	.070	.375	.344	.375	.068	.040	.190	.220
203	.3125-24	.500-13UNC-2A	.440 .432	.316	.070	.430	.407	.437	.068	.040	.190	.220
204	.375-24	.5625-12UNC-2A	.503 .495	.380	.070	.495	.469	.500	.068	.040	.190	.250
205	.4375-20	.625-11UNC-2A	.565 .551	.445	.100	.550	.532	.625	.068	.040	.190	.280
206	.500-20	.6875-11NS-2A	.625 .615	.507	.100	.615	.595	.688	.068	.040	.190	.280
207	.5625-18	.8125-16UN-2A	.752 .744	.580	.100	.745	.720	.812	.068	.040	.190	.320
208	.625-18	.875-14UNF-2A	.815 .807	.640	.100	.805	.782	.875	.068	.040	.190	.330
209	.750-16	1.125-12UNF-2A	1.050 1.040	.763	.100	1.040	.975	1.125	.103	.070	.250	---
209L	.750-16	1.125-12UNF-2A	1.050 1.040	.763	.100	1.040	.975	1.250	.103	.070	.250	.490
210	.875-14	1.250-12UNF-2A	1.175 1.165	.888	.100	1.165	1.100	1.250	.103	.070	.250	---
210L	.875-14	1.250-12UNF-2A	1.175 1.165	.888	.100	1.165	1.100	1.375	.103	.070	.250	.490
211	1.000-12	1.375-12UNF-2A	1.300 1.290	1.015	.100	1.290	1.225	1.375	.103	.070	.250	---
211L	1.000-12	1.375-12UNF-2A	1.300 1.290	1.015	.100	1.290	1.225	1.500	.103	.070	.250	.550

PREPARING ACTIVITY: ARMY-AR

CUSTODIANS: ARMY- AR NAVY- AS

AIR FORCE- 99 OLA-

REVIEW: AV, SH, 82, IS, NS

USER: AT, GL, MC

PROJECT NUMBER: 5340-2052

MILITARY SPECIFICATION SHEET

TITLE

INSERT, SCREW-THREAD,
 LOCKED IN, KEY-LOCKED,
 HEAVY DUTY

SPECIFICATION SHEET NUMBER

MS51831F 9 MAR 92

SUPERSEDING

MS51831E 6 SEPT 85

AMSC-

N/A

FBC- 5340

DISTRIBUTION STATEMENT

A Approved for public release, distribution is unlimited

Page 2 of 3

DD Form 672, MAY 88

PREVIOUS EDITIONS ARE OBSOLETE

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DOOISS SPECIFIED IN THE SOLICITATION: MIL-I-45914

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

Form Approved
 OMB No 0704-0188

REQUIREMENTS

- MATERIAL.** STEEL, CORROSION-RESISTANT, TYPE 303 (UNS S30300) IN ACCORDANCE WITH AMS 5640 (TYPE 1) OR ASTM A 582, OR 303SE (UNS S30323) IN ACCORDANCE WITH AMS 5640 (TYPE 2), AMS 5738 OR ASTM A 582 STEEL, CORROSION-RESISTANT, TYPE A286 (UNS S66286) IN ACCORDANCE WITH AMS 5734 OR AMS 5737 STEEL, ALLOY, GRADE 4140 (UNS G41400) IN ACCORDANCE WITH MIL-S-5626 OR GRADE 8740 (UNS G87400) IN ACCORDANCE WITH AMS 6322
 LOCKING KEYS STEEL, CORROSION-RESISTANT, TYPE 302 CHEMICAL COMPOSITION OF ASTM A 580 ONLY
- CADMIUM PLATING AND SURFACE TREATMENT.** CORROSION-RESISTANT STEEL SHALL BE PASSIVATED IN ACCORDANCE WITH QQ-P-35
 ALLOY STEEL SHALL BE CADMIUM PLATED IN ACCORDANCE WITH QQ-P-418, TYPE II, CLASS 3 THE LOCKING KEYS MAY OR MAY NOT BE CADMIUM PLATED
- LUBRICATION.** INSERTS WITH SELF-LOCKING INTERNAL THREADS SHALL BE DRY FILM LUBRICATED IN ACCORDANCE WITH MIL-L-48010, TYPE I. THE LOCKING KEYS MAY OR MAY NOT BE LUBRICATED
- SURFACE TEXTURE.** MACHINED SURFACES SHALL BE IN ACCORDANCE WITH ANSI/ASME B48.1
- HEAT TREATMENT.** ALLOY STEEL INSERTS SHALL BE HEAT TREATED TO 160,000 psi FtU MINIMUM IN ACCORDANCE WITH MIL-H-6875
 CORROSION-RESISTANT STEEL INSERTS, TYPE A286 (AMS 5734), SHALL BE HEAT TREATED TO 140,000 psi FtU MINIMUM
- HARDNESS.** ALLOY STEEL INSERTS SHALL HAVE A HARDNESS RANGE OF 38-40 HRC
 CORROSION-RESISTANT STEEL INSERTS, TYPE A286, SHALL HAVE A HARDNESS RANGE OF 29-38 HRC.
- PART NUMBER.** THE PART NUMBER SHALL CONSIST OF THE BASIC MS SHEET NUMBER PLUS THE DASH NUMBER TAKEN FROM TABLE I OR TABLE II, AS APPLICABLE
 EXAMPLE. MS51831 - 102 L
 ADD "L" AS SUFFIX TO DASH NUMBER FOR INTERNAL THREAD LOCK
 LEAVE BLANK IF INTERNAL THREAD LOCK IS NOT REQUIRED
 DASH NUMBER FROM TABLE I OR TABLE II
 MATERIAL DASH INDICATES CRES, TYPE 303 OR 303SE
 ADD "CA" IN LIEU OF DASH FOR CRES, TYPE A286
 ADD "A" IN LIEU OF DASH FOR ALLOY STEEL, GRADE 4140 OR 8740
 BASIC MS SHEET NUMBER
 EXAMPLE. MS51831CA102L INDICATES - INSERT, SCREW-THREAD, LOCKED IN, KEY-LOCKED, HEAVY DUTY, CRES A286, .250-20UNJC-38 INTERNAL THREAD WITH INTERNAL THREAD LOCK FEATURE
- MATERIAL MARKING.** CRES 303 OR 303SE HAS NO IDENTIFYING MARK.
 CRES A286 SHALL BE IDENTIFIED ON TOP OF INSERT BY ONE (1) LINE OR DASH MARK.
 ALLOY STEEL 4140 OR 8740 SHALL BE IDENTIFIED ON TOP OF INSERT BY TWO (2) PARALLEL LINES OR DASH MARKS
- INSERTS WITH INTERNAL THREAD SIZE 250 AND SMALLER SHALL BE SUPPLIED WITH TWO (2) LOCKING KEYS SPACED 180° APART
 INSERTS WITH INTERNAL THREAD SIZE 3125 AND GREATER SHALL BE SUPPLIED WITH FOUR (4) LOCKING KEYS SPACED 90° APART
- INSERTS SHALL BE FREE OF ALL HANGING BURRS AND SLIVERS WHICH MIGHT BECOME DISLODGED UNDER USAGE
- SOURCE IDENTIFICATION MARK.** SOURCE IDENTIFICATION MARK SHALL BE IN ACCORDANCE WITH MIL-I-45814
- ALL DIMENSIONS ARE AFTER CADMIUM PLATING OR SURFACE TREATMENT AND PRIOR TO THE ADDITION OF THE LUBRICATION
- FILLETS ARE R.015 MAXIMUM.

NOTES

- ALL DIMENSIONS ARE IN INCHES
- INSTALLATION OF INSERTS SHALL BE IN ACCORDANCE WITH MS51835
- ☒ DISTANCE TO CENTER OF INTERNAL THREAD LOCK.
- IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.
- REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DOOISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.

PREPARING ACTIVITY: ARMY-AR CUSTODIANS: ARMY- AR NAVY- AS AIR FORCE- 99 DLA- REVIEW: AV, SH, 82, IS, NS USER: AT, GL, MC PROJECT NUMBER 5340-2052	MILITARY SPECIFICATION SHEET TITLE INSERT, SCREW-THREAD, LOCKED IN, KEY-LOCKED, HEAVY DUTY	SPECIFICATION SHEET NUMBER MS51831F 9 MAR 92 SUPERSEDING MS51831E 6 SEPT 85 AMSC- N/A FSC- 5340
DISTRIBUTION STATEMENT Approved for public release, distribution is unlimited		Page <u>3</u> of <u>3</u>