

## REPORT No. 554

### WIND-TUNNEL INVESTIGATION OF ORDINARY AND SPLIT FLAPS ON AIRFOILS OF DIFFERENT PROFILE

By CARL J. WENZINGER

#### SUMMARY

*The Clark Y, the N. A. C. A. 23012, and the N. A. C. A. 23021 airfoils equipped with full-span ordinary flaps and with full-span simple split flaps were tested in the N. A. C. A. 7- by 10-foot wind tunnel. The principal object of the tests was to determine the characteristics of the airfoils with ordinary flaps and, in addition, to determine the relative merits of the various airfoils when equipped with either ordinary flaps or with simple split flaps. The Clark Y airfoil was tested with 3 widths of ordinary flap, 10, 20, and 30 percent of the airfoil chord. The optimum width of the ordinary and the simple split flap based on the maximum lift attained with the Clark Y airfoil was then tested on each of the other two airfoils.*

*The optimum width of ordinary flap for maximum lift attainable was found to be the same as that of the split flap, 20 percent of the airfoil chord. The split flap produced somewhat greater increases in  $C_{L_{max}}$  on the airfoils tested than did the ordinary flap of the same width, but the  $L/D$  at maximum lift was practically the same for the two types of flap. Any gap between the airfoil and the leading edge of ordinary flaps had a very detrimental effect on the  $C_{L_{max}}$  attainable. Based principally on factors affecting airplane performance, the relative order of merit of the airfoils tested with either ordinary or split flaps is N. A. C. A. 23012, Clark Y, and N. A. C. A. 23021. The hinge-moment coefficients (based on flap chord and area) of the full-span ordinary flaps were practically independent of flap chord; the actual hinge moments varied approximately as the square of the chord. In addition, the hinge-moment coefficients of the split flaps were practically the same as those of full-span ordinary flaps of corresponding widths.*

#### INTRODUCTION

Many experimental investigations have been made of various types of flap for increasing, in particular, the maximum lift of airplanes as an aid to improved performance. Among the devices already investigated in considerable detail by the N. A. C. A. are simple split flaps, split flaps of the Zap type, Fowler flaps, and external-airfoil flaps. Some uncorrelated data are also available from various sources on slotted flaps and on

ordinary flaps. Because of the simplicity of ordinary flaps and the lack of correlated data on them as a lift-increasing device, it appeared desirable to make a more complete investigation of this type of flap.

Three basic airfoil sections were used in the present tests to obtain an estimate of the effect of airfoil section and thickness. In addition to the Clark Y, the N. A. C. A. 23012 airfoil was selected as being representative of the best airfoils at present available for use on conventional airplanes, and the N. A. C. A. 23021 airfoil was selected as a representative thick section. Three widths of ordinary flap were tested on the Clark Y airfoil, and one width on each of the other two airfoils. For purposes of comparison one simple split flap was also tested on the N. A. C. A. 23012 and 23021 airfoils, and data are included from previous tests of the Clark Y airfoil with a split flap. The aerodynamic characteristics of the airfoils with all the different flaps were measured and, in addition, hinge moments were obtained for the ordinary flaps on the Clark Y airfoil.

#### MODELS AND TESTS

**Models.**—Mahogany models of the Clark Y, the N. A. C. A. 23012, and the N. A. C. A. 23021 airfoil sections were tested. The span of each model was 60 inches and the chord 10 inches. The Clark Y airfoil with the 3 widths of ordinary flap tested (10, 20, and 30 percent of the wing chord) is shown in figure 1. These flaps are arranged to lock rigidly to the airfoil or to rotate freely about their respective hinge axes. The other two airfoils are shown with ordinary flaps in figure 2 and with split flaps in figure 3.

The ordinates of the airfoil sections are included with the charts of their aerodynamic characteristics in figures 4, 5, and 6. The size of flap that gave the highest value of the maximum lift coefficient for the Clark Y airfoil together with reasonable hinge moments (20-percent-chord flap) was used with the N. A. C. A. 23012 and the N. A. C. A. 23021 airfoils.

**Tests.**—The tests were made in the N. A. C. A. 7- by 10-foot wind tunnel which, together with associ-

ated apparatus and standard test procedure, is described in reference 1. The dynamic pressure was maintained constant at 16.37 pounds per square foot, which corresponds to an air speed of 80 miles per hour under standard sea-level conditions. The average Reynolds Number for the tests was 609,000, based on the air speed and on the 10-inch airfoil chord. Lift,

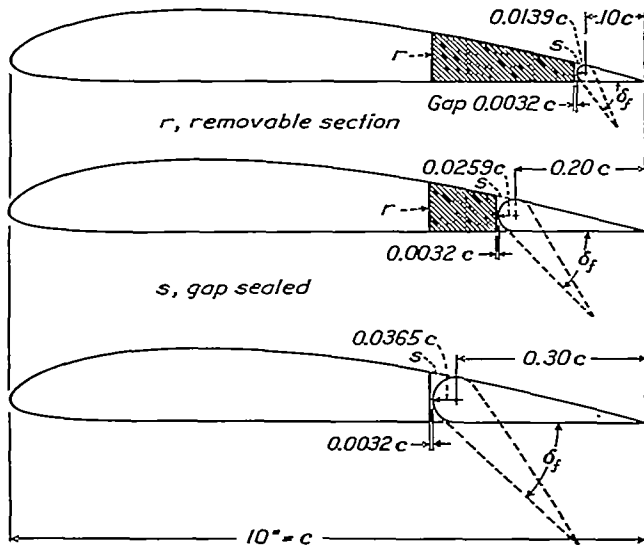


FIGURE 1.—Full-span ordinary flaps tested on the Clark Y airfoil.

drag, and pitching moments were measured for all flap arrangements with flap deflections from 0° to beyond those for maximum lift. The angle-of-attack range covered was from below zero lift to beyond the stall of the airfoil. Hinge moments were also measured for the three widths of ordinary flap on the Clark Y airfoil.

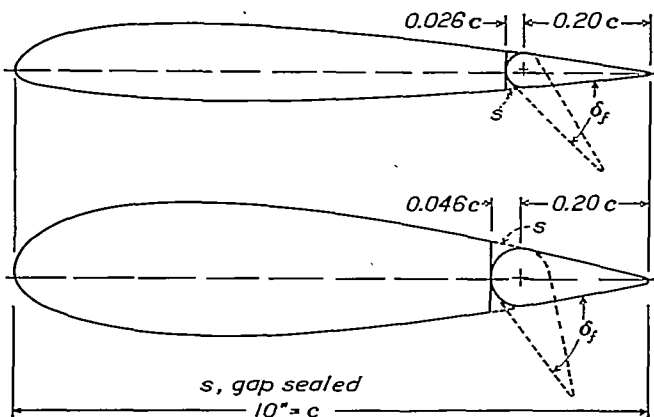


FIGURE 2.—Full-span ordinary flaps tested on the N. A. C. A. 23012 and N. A. C. A. 23021 airfoils.

These moments were obtained by the methods given in reference 2, which presents results of hinge-moment tests on split flaps of various chords.

**RESULTS**

Results of the investigation are given in standard nondimensional coefficient form for the following four coefficients:

$$C_L = \frac{\text{lift}}{qS}$$

$$C_D = \frac{\text{drag}}{qS}$$

$$C_{m,c/4} = \frac{\text{pitching moment about quarter chord}}{qSc}$$

$$C_{h_f} = \frac{\text{flap hinge moment}}{qS_f c_f}$$

in which

- $S$ , airfoil area.
- $S_f$ , flap area.
- $c$ , airfoil chord.
- $c_f$ , flap chord.
- $q$ , dynamic pressure.

The data were corrected for the effects of the jet boundaries and for the tunnel static-pressure

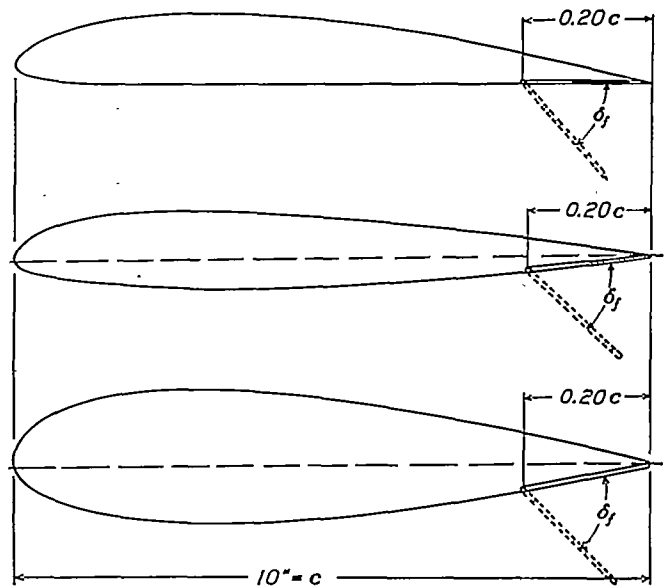


FIGURE 3.—Full-span split flaps tested on the Clark Y, the N. A. C. A. 23012, and the N. A. C. A. 23021 airfoils.

gradient. The standard jet-boundary corrections,  $\Delta\alpha = \delta \frac{S}{C} C_L \times 57.3$ , in degrees, and  $\Delta C_D = \delta \frac{S}{C} C_L^2$ , where  $C$  is the jet cross-sectional area, were used. The value of factor  $\delta = -0.165$  was taken as being most nearly representative of the boundary effect in the 7- by 10-foot wind tunnel. (See reference 3.) The longitudinal static-pressure gradient in the 7- by 10-foot wind tunnel produces an additional downstream force on the model. This force corresponds to a value of  $\Delta C_D = 0.0015$  for rectangular airfoils of thickness equal to 12 percent of the chord and  $\Delta C_D = 0.0029$  for an airfoil having a thickness of 21 percent of the chord. These values were obtained in accordance with methods given in reference 4.

**DISCUSSION  
 PLAIN AIRFOILS**

Complete aerodynamic characteristics of the three plain airfoils are given in figures 4, 5, and 6. These characteristics include those for the three airfoils of

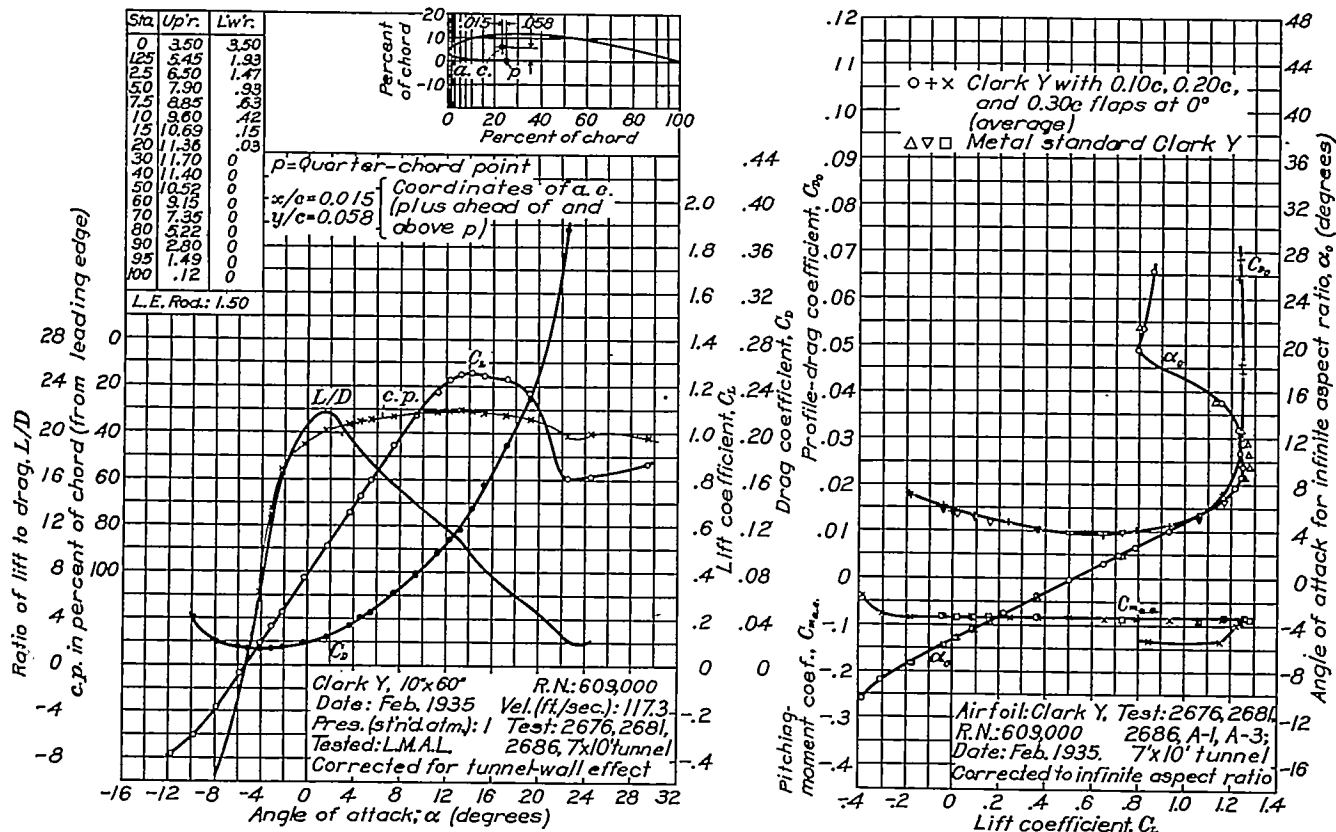


FIGURE 4.—The Clark Y airfoil.

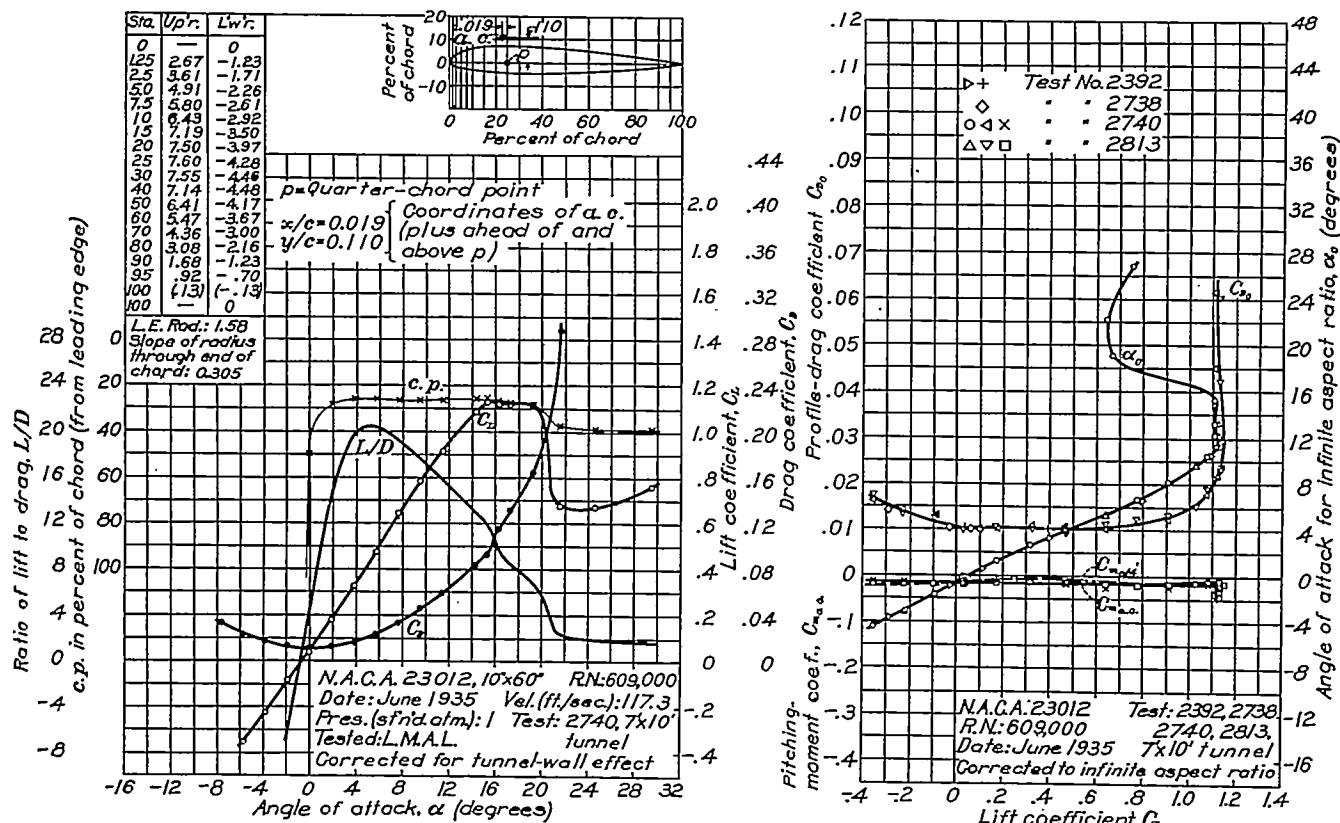


FIGURE 5.—The N. A. C. A. 23012 airfoil

aspect ratio 6 corrected to free-air conditions, profile-drag coefficients, and angle of attack for infinite aspect ratio.

AIRFOILS WITH FLAPS

Clark Y airfoil with ordinary flap.—Lift, drag, and center-of-pressure characteristics for the airfoil with the 10-percent-chord flap are given in figure 7. These results are for the airfoil with the gap between the flap and main portion of the airfoil completely sealed with plasticine. Values of  $L/D$  and  $C_{m_{c/4}}$  for the 10-percent-chord flap are given in figure 8. Values of  $C_{L_{max}}$  and values of  $L/D$  and  $C_D$  at  $C_{L_{max}}$  are given in figure 9 for different deflections of the 10-percent-chord flap. The latter characteristics are given for the conditions in which the gap between the flaps and the main portion

from references 5 and 6.) The effects on  $C_{L_{max}}$  are shown and the effects on  $L/D$  and  $C_D$  at  $C_{L_{max}}$ . From these results it may be concluded that split flaps of the same width give somewhat higher maximum lifts than do ordinary flaps. Values of  $L/D$  and  $C_D$  at  $C_{L_{max}}$  are nearly the same for both types of flap. Practically no further gain in maximum lift is obtained by increasing the flap chord beyond 20 percent of the airfoil chord, the data indicating that with wider split flaps the maximum lift remains about the same but that it drops off with wider ordinary flaps. The optimum width of either ordinary or split flaps for maximum lift appears to be 20 percent of the airfoil chord.

Clark Y airfoil with a 20-percent-chord split flap.—For comparison with tests of the N. A. C. A. 23012 and N. A. C. A. 23021 airfoils having split flaps, the

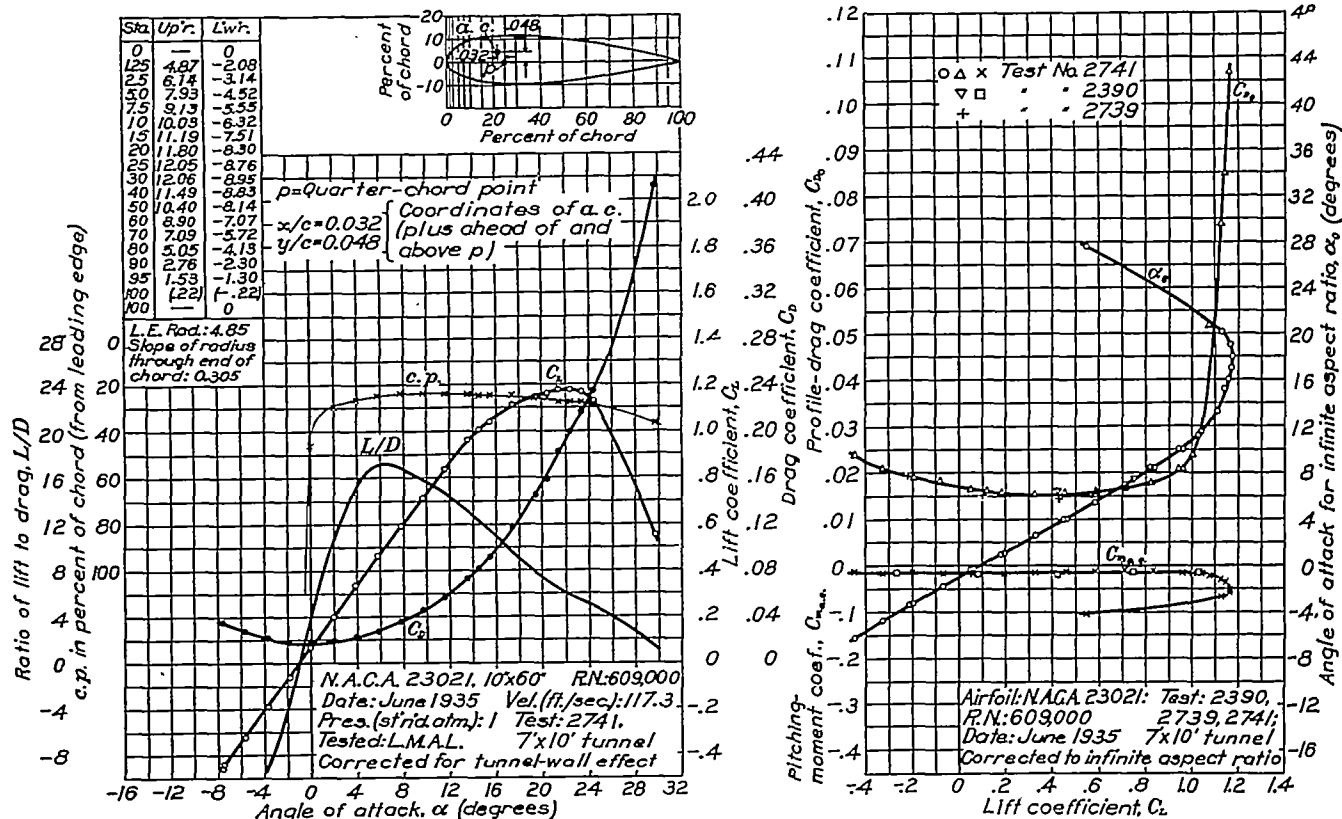


FIGURE 6.—The N. A. C. A. 23021 airfoil.

of the airfoil is both open and sealed. It will be noted from figure 9 that even a small open gap had a very detrimental effect on the maximum lift of the airfoil. It is therefore essential to keep the flap gaps completely sealed to obtain the best characteristics with ordinary flaps. Similar charts for the airfoil with a 20-percent-chord flap are shown in figures 10, 11, and 12. Charts for the airfoil with a 30-percent-chord flap are given in figures 13, 14, and 15.

Optimum sizes of ordinary and split flaps on the Clark Y airfoils.—Figure 18 gives a comparison of different widths of ordinary and of split flaps on Clark Y airfoils. (The data for the split flaps are taken

lift, the drag, and the center-of-pressure characteristics for a Clark Y airfoil with a 20-percent-chord split flap are given in figure 16. These data were taken from reference 6 and have been corrected for a wing of aspect ratio 6 in free air. The  $L/D$  and  $C_{m_{c/4}}$  for the Clark Y airfoil with split flap are given in figure 17. A comparison of 20-percent-chord ordinary and split flaps on a Clark Y airfoil is given in figure 19. This figure shows the variation of  $C_{L_{max}}$  and of  $L/D$  and  $C_D$  at  $C_{L_{max}}$  for different flap deflections. As previously noted, the split flap gives a somewhat higher maximum lift than does the ordinary flap but has slight effect on the other factors.

N. A. C. A. 23012 airfoil with 20-percent-chord ordinary and split flaps.—Lift, drag, and center-of-pressure characteristics are given in figure 20 for a

curves for 20-percent-chord split flaps are given in figures 22 and 23. A comparison of ordinary and

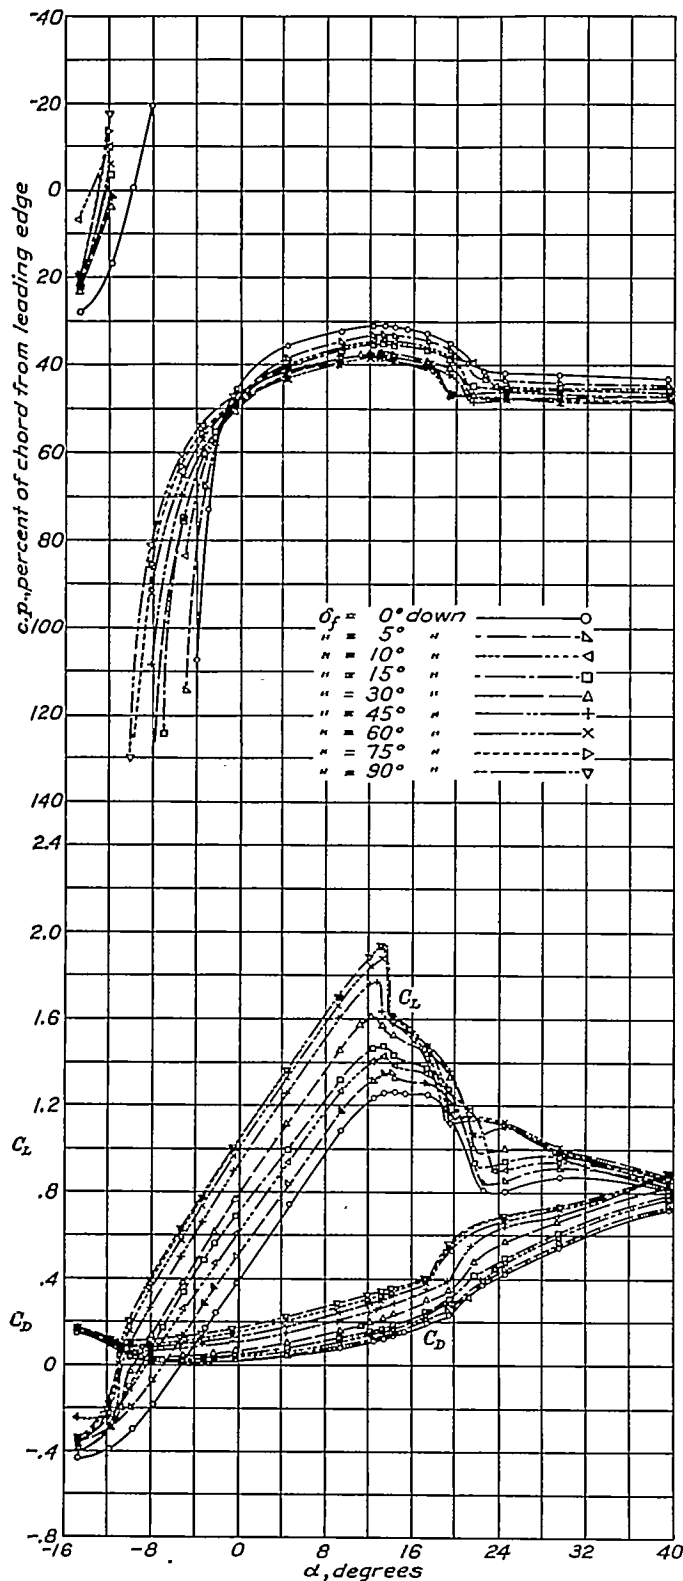


FIGURE 7.—Lift, drag, and center of pressure for the Clark Y airfoil with 0.10c full-span ordinary flap. Flap gap sealed.

20-percent-chord ordinary flap on the N. A. C. A. 23012 airfoil. The  $L/D$  and  $C_{m_c/h}$  for the 20-percent-chord ordinary flap are given in figure 21. Similar

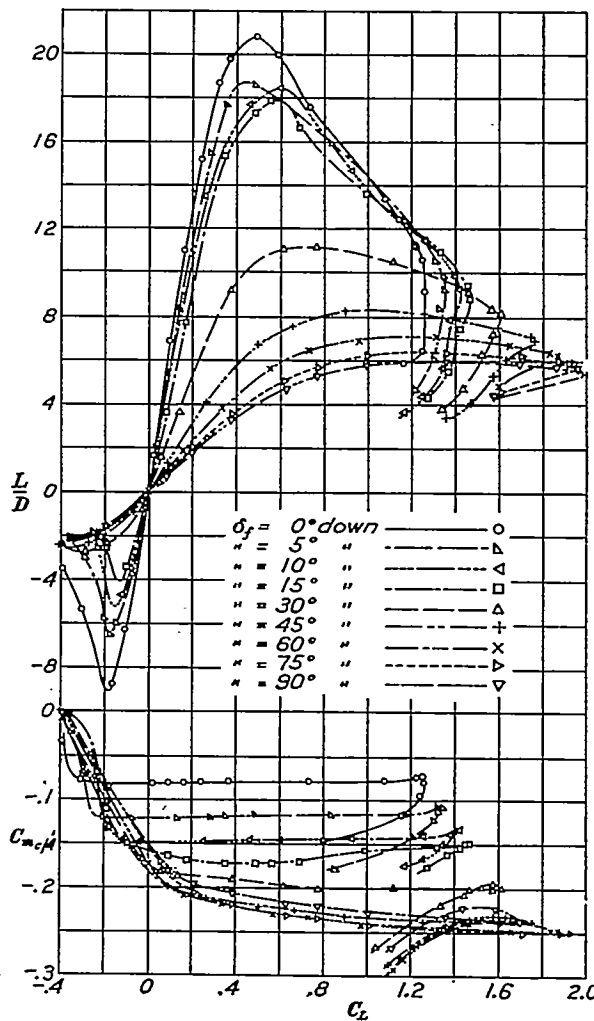


FIGURE 8.—Lift-drag ratio and pitching-moment coefficient for the Clark Y airfoil with 0.10c full-span ordinary flap. Flap gap sealed.

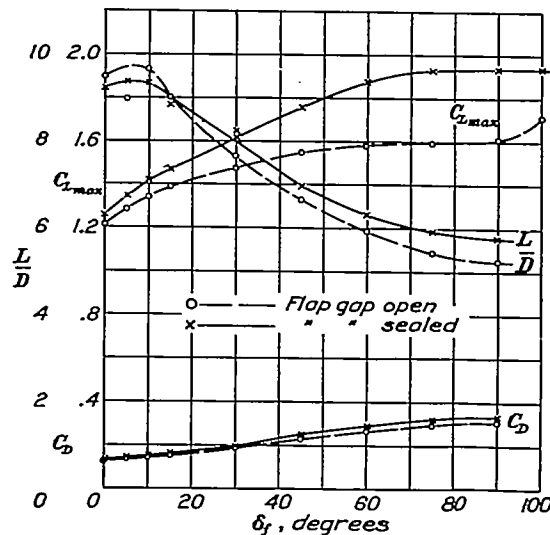


FIGURE 9.—Effect of flap deflection on maximum lift, and on lift-drag ratio and drag at maximum lift. The 0.10c full-span ordinary flap on the Clark Y airfoil.

split flaps on the N. A. C. A. 23012 airfoil is given in figure 24. This figure shows the effects of  $C_{Lmax}$  as well as of  $L/D$  and  $C_D$  at  $C_{Lmax}$  for different flap deflec-

tions. As in the case of the Clark Y airfoil, the split flap gave a higher maximum lift on the N. A. C. A.

N. A. C. A. 23021 airfoil with 20-percent-chord ordinary and split flaps.—Charts similar to those for

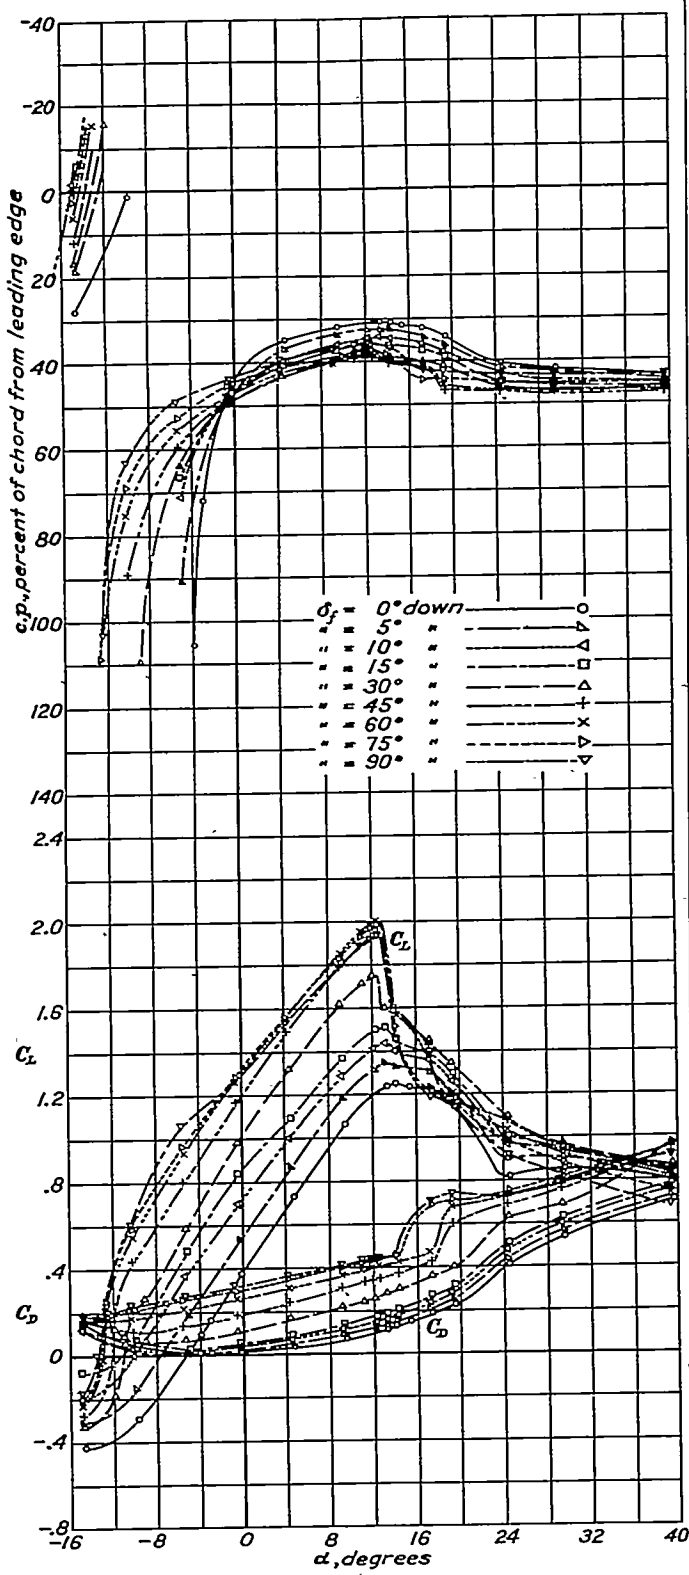


FIGURE 10.—Lift, drag, and center of pressure for the Clark Y airfoil with 0.20c full-span ordinary flap. Flap gap sealed.

23012 airfoil than did the ordinary flap. In addition, the two types of flap had almost the same effect on the other factors considered.

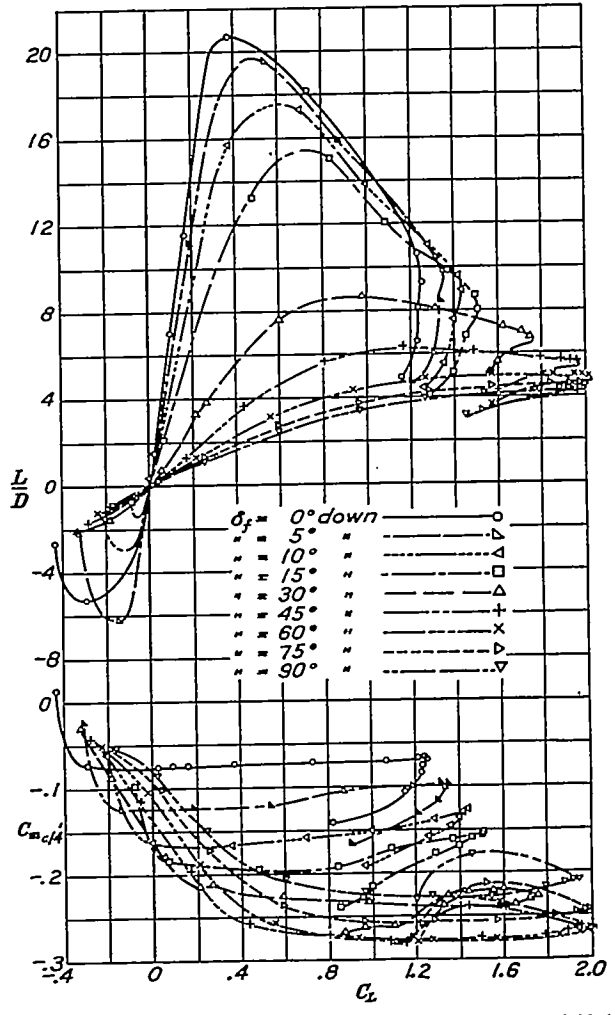


FIGURE 11.—Lift-drag ratio and pitching-moment coefficient for the Clark Y airfoil with 0.20c full-span ordinary flap. Flap gap sealed.

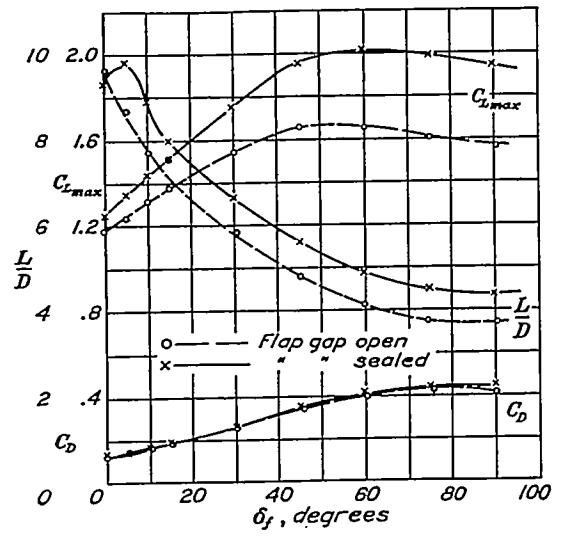


FIGURE 12.—Effect of flap deflection on maximum lift, and on lift-drag ratio and drag at maximum lift. The 0.20c full-span ordinary flap on the Clark Y airfoil.

the N. A. C. A. 23012 airfoil are given for the N. A. C. A. 23021 airfoil with flaps in figures 25, 26, 27, 28,

and 29. The ordinary and split flaps on the N. A. C. A. 23021 airfoil also showed the same relative

Comparison of lift effects of 20-percent-chord ordinary and split flaps on Clark Y, N. A. C. A. 23012,

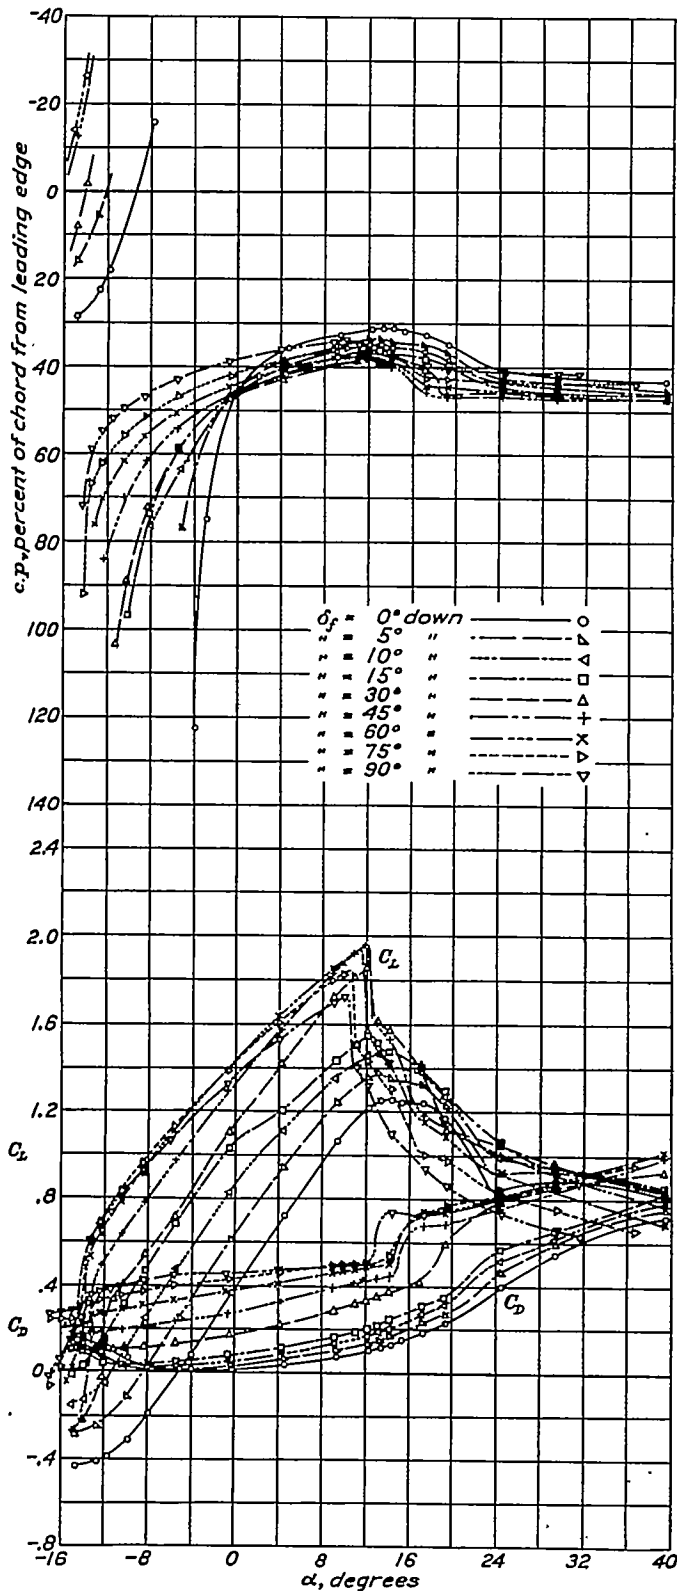


FIGURE 13.—Lift, drag, and center of pressure for the Clark Y airfoil with 0.30c full-span ordinary flap. Flap gap sealed.

effects as they did on the Clark Y and on the N. A. C. A. 23012 airfoils.

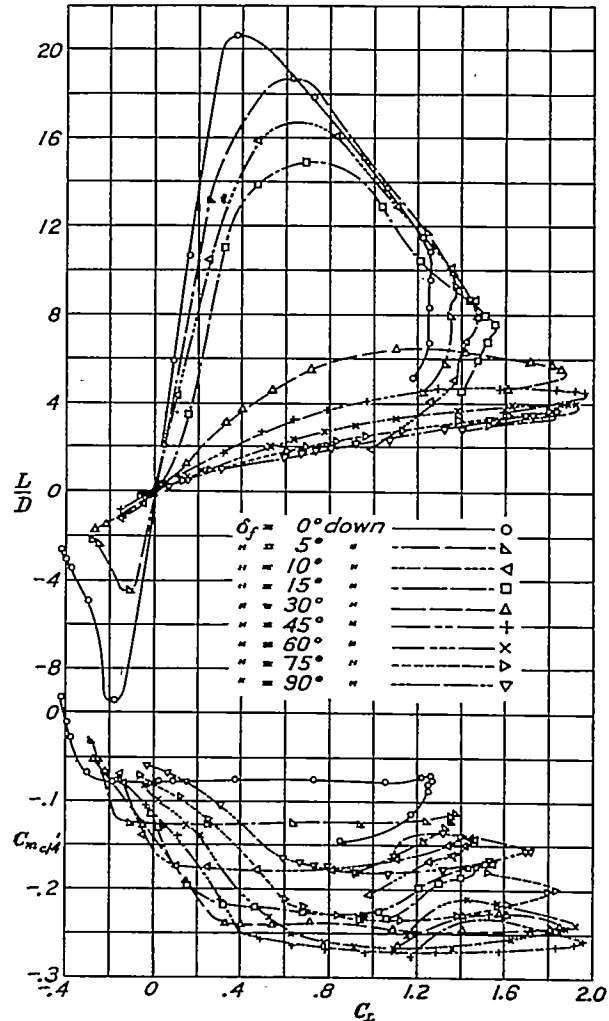


FIGURE 14.—Lift-drag ratio and pitching-moment coefficient for the Clark Y airfoil with 0.30c full-span ordinary flap. Flap gap sealed.

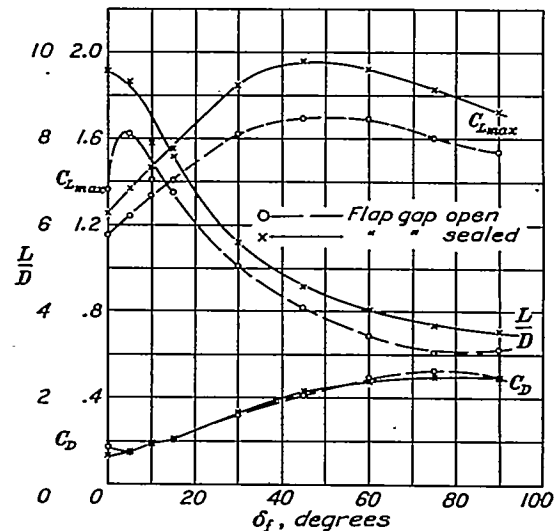


FIGURE 15.—Effect of flap deflection on maximum lift, and on lift-drag ratio and drag at maximum lift. The 0.30c full-span ordinary flap on the Clark Y airfoil.

and N. A. C. A. 23021 airfoils.—Table I shows the effects at a test Reynolds Number of 609,000 on the

maximum lift coefficient with flaps neutral; on the maximum lift coefficient with flaps deflected; on the increment in maximum lift coefficient due to the two

Somewhat higher maximum lift coefficients and greater increments in maximum lift were given by the

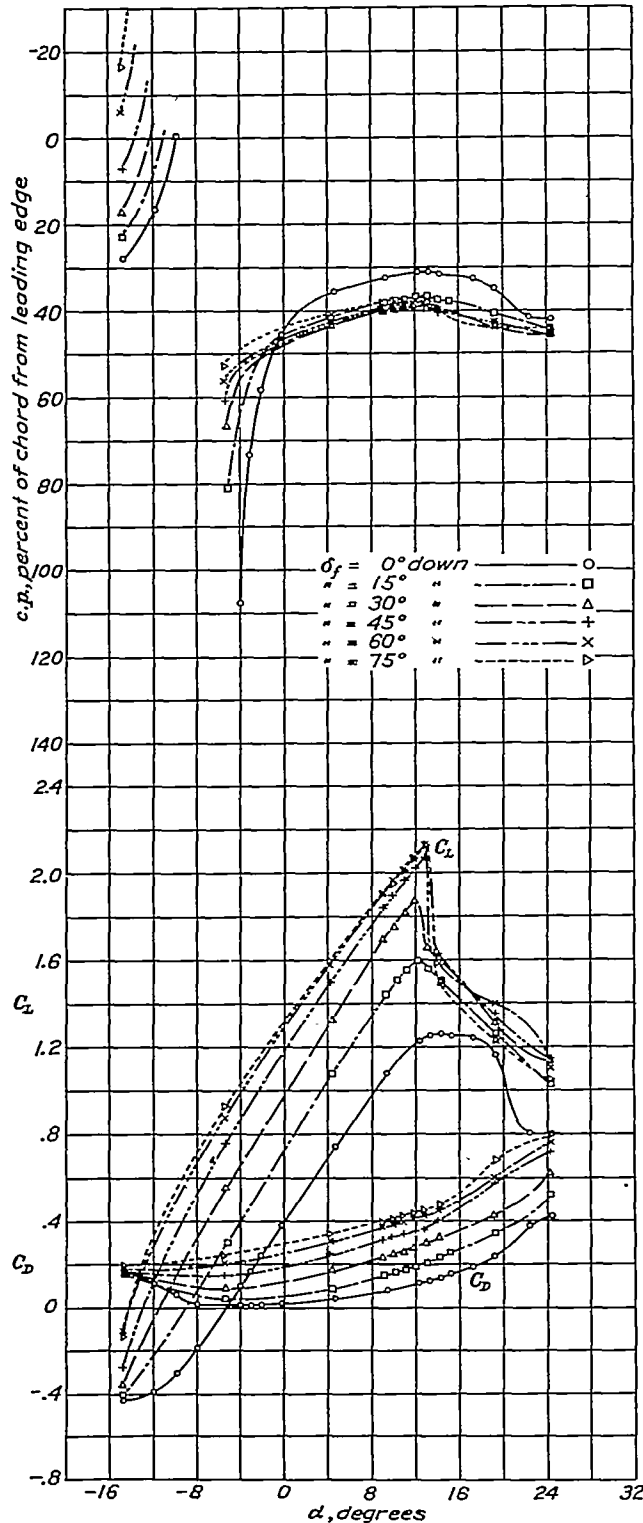


FIGURE 16.—Lift, drag, and center of pressure for Clark Y airfoil with 0.20c full-span split flap. (Data from reference 6.)

types of flaps on various airfoils; on the ratio of maximum lift to minimum drag; and on the ratio of lift to drag at maximum lift.

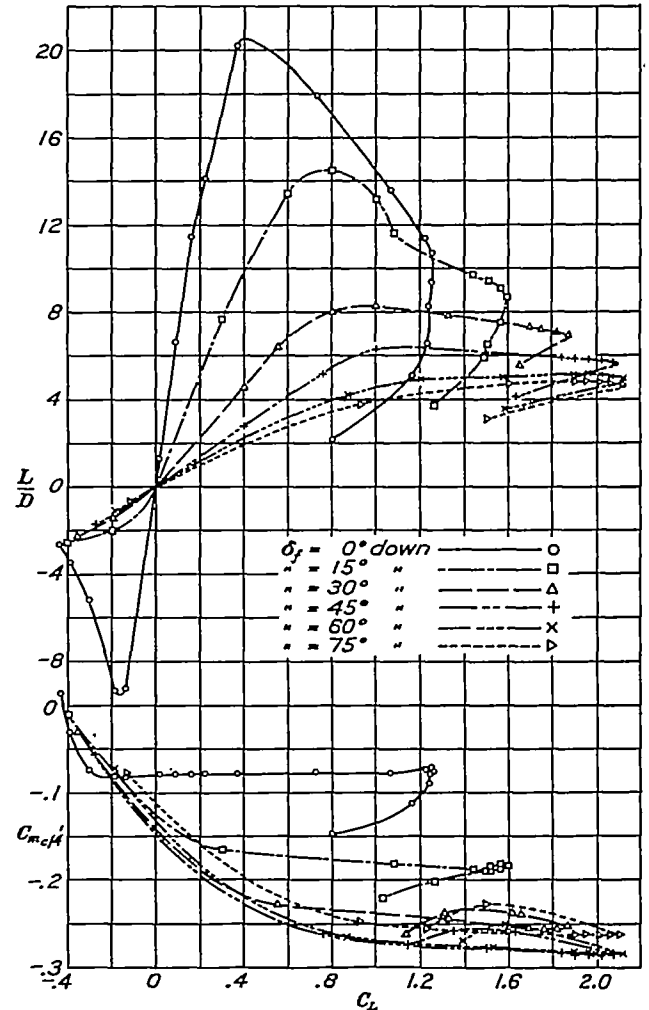


FIGURE 17.—Lift-drag ratio and pitching-moment coefficient for the Clark Y airfoil with 0.20c full-span split flap.

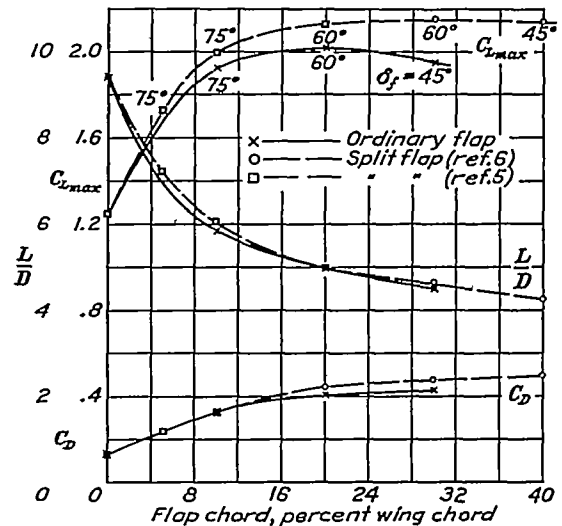


FIGURE 18.—Effect of flap chord on maximum lift, and on lift-drag ratio and drag at maximum lift for both ordinary and split flaps on the Clark Y airfoil.

split flap than by ordinary flaps on the three airfoils tested. The highest maximum lift coefficient and the

greatest increment in maximum lift were both given by flaps on the N. A. C. A. 23021 airfoil. In this case an

lift above that of the plain airfoil of more than 100 percent. The highest speed-range ratio  $C_{L_{max}}/C_{D_{min}}$  was given, however, by flaps on the N. A. C. A. 23012 air-

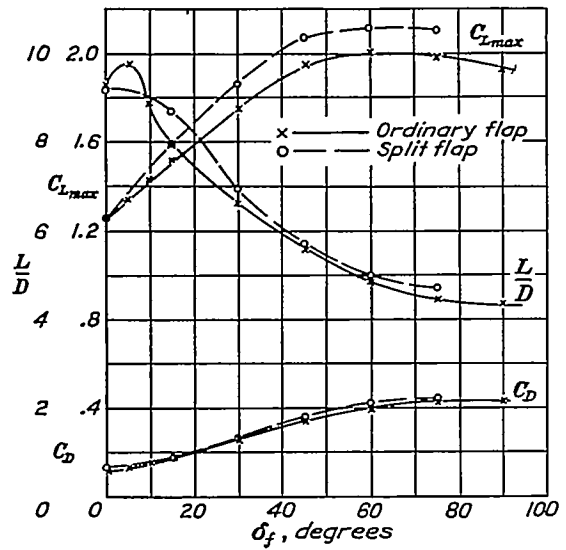


FIGURE 19.—Effect of flap deflection on maximum lift, and on lift-drag ratio and drag at maximum lift. The 0.20c full-span ordinary and split flaps on the Clark Y airfoil.

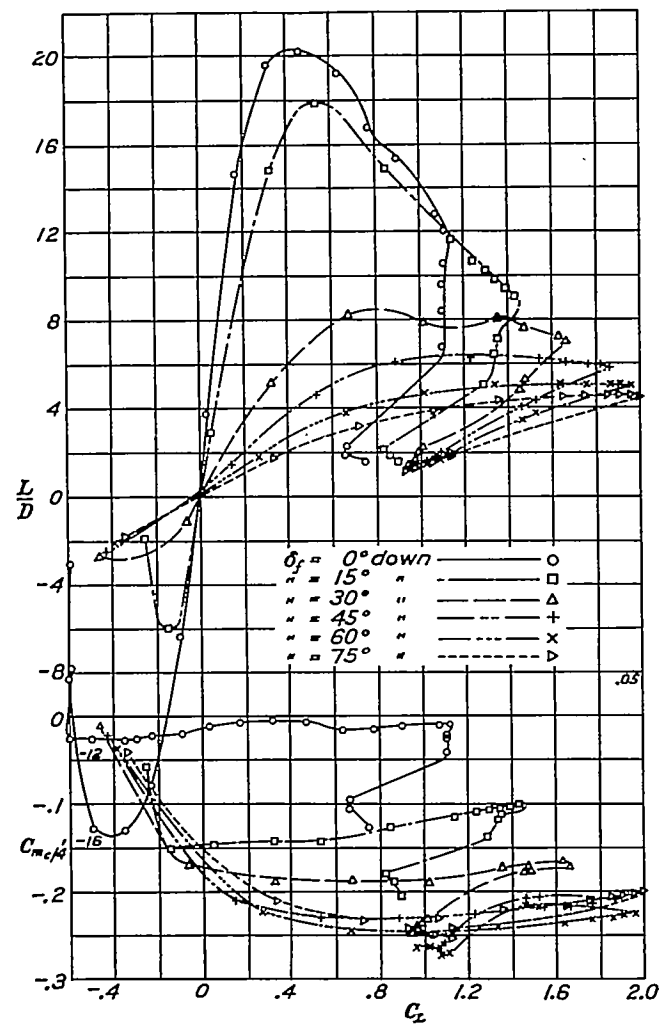


FIGURE 21.—Lift-drag ratio and pitching-moment coefficient for the N. A. C. A. 23012 airfoil with 0.20c full-span ordinary flap. Flap gap sealed.

increment in maximum lift coefficient of 1.193 was obtained, which represents an increase in the maximum

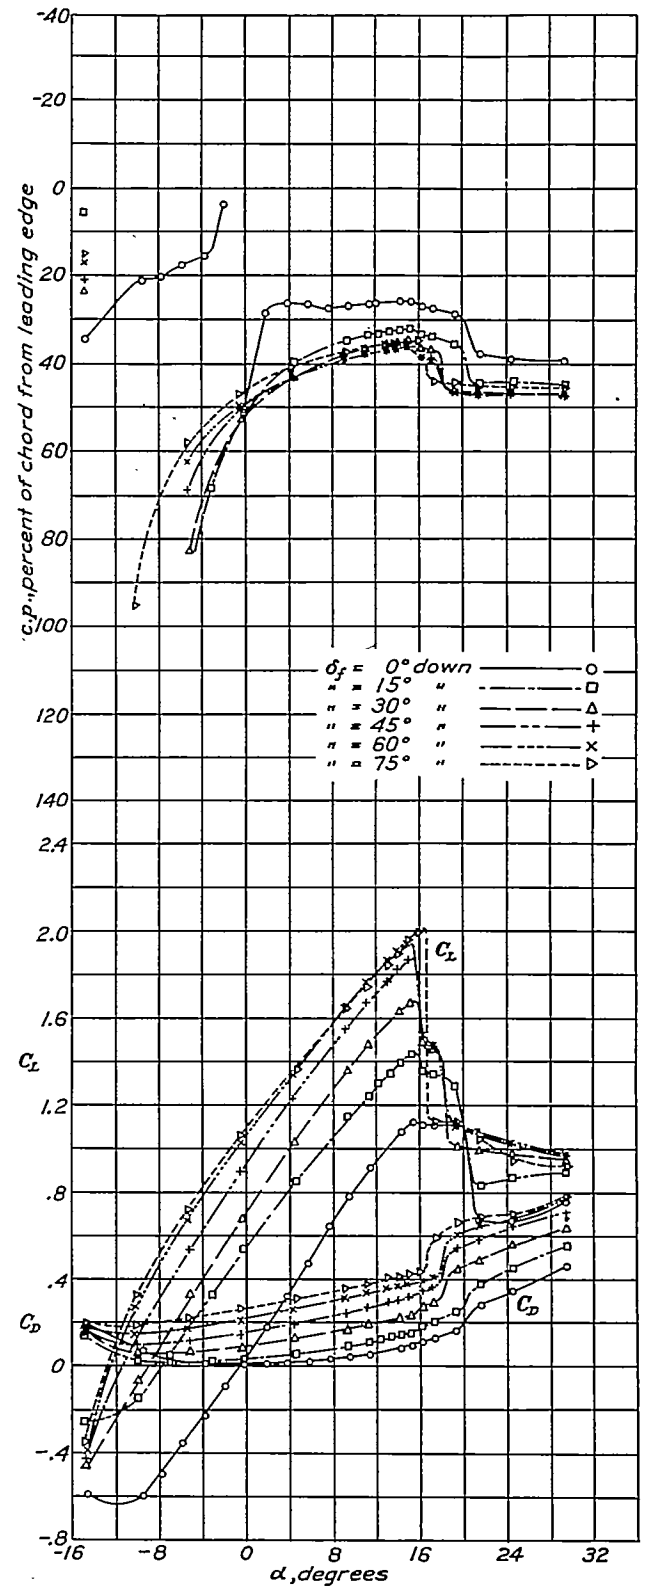


FIGURE 20.—Lift, drag, and center of pressure for the N. A. C. A. 23012 airfoil with 0.20c full-span ordinary flap. Flap gap sealed.

foil, which has a lower maximum lift but which also has a considerably lower minimum drag. The steepest

gliding angle attainable (indicated by  $L/D$  at  $C_{Lmax}$ ) is the same with either type of flap on the particular airfoil considered.

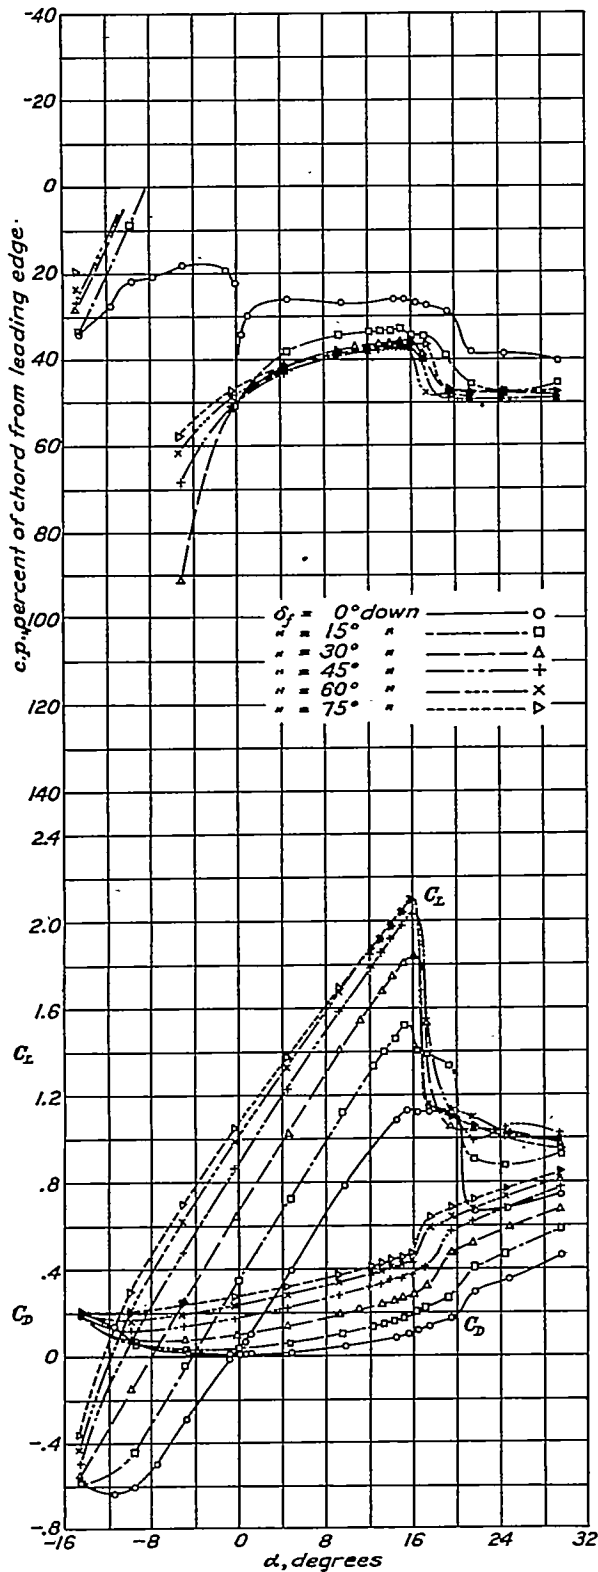


FIGURE 22.—Lift, drag, and center of pressure for the N. A. C. A. 23012 airfoil with 0.20c full-span split flap.

Some tests in the full-scale tunnel and in the variable-density tunnel (reference 7) indicate that the maximum

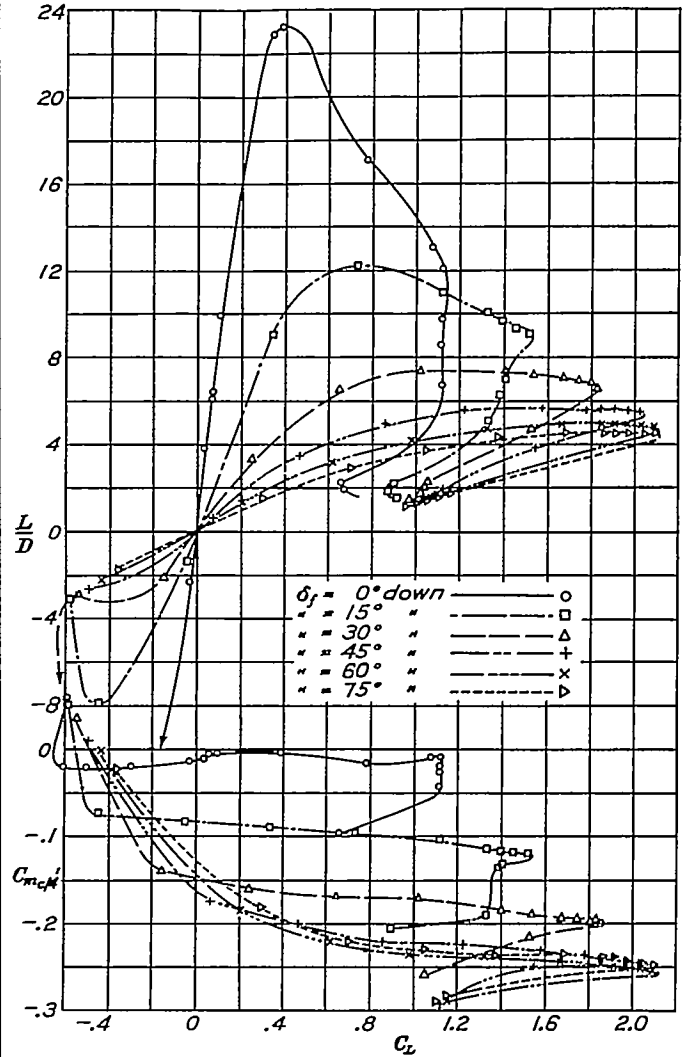


FIGURE 23.—Lift-drag ratio and pitching-moment coefficient for the N. A. C. A. 23012 airfoil with 0.20c full-span split flap.

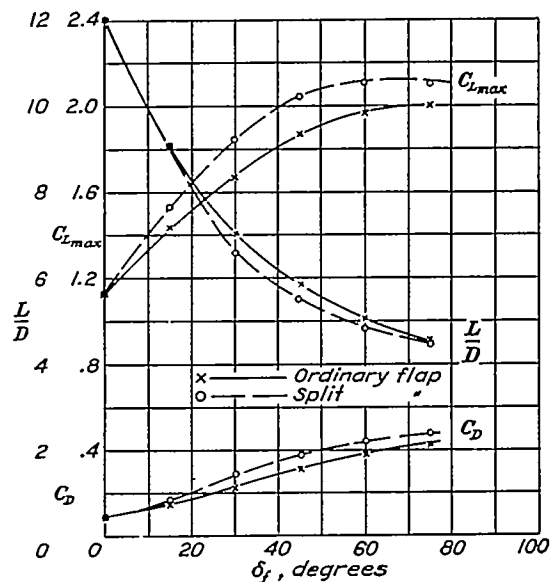


FIGURE 24.—Effect of flap deflection on maximum lift, and on lift-drag ratio and drag at maximum lift. The 0.20c full-span ordinary and split flaps on the N. A. C. A. 23012 airfoil.

lift of the N. A. C. A. 23012 airfoil is equal to or slightly greater than that of the Clark Y airfoil in the normal full-scale range of the Reynolds Number. Further-

maximum lift than the Clark Y. Thus, it appears that the N. A. C. A. 23012 plain wing will have some ad-

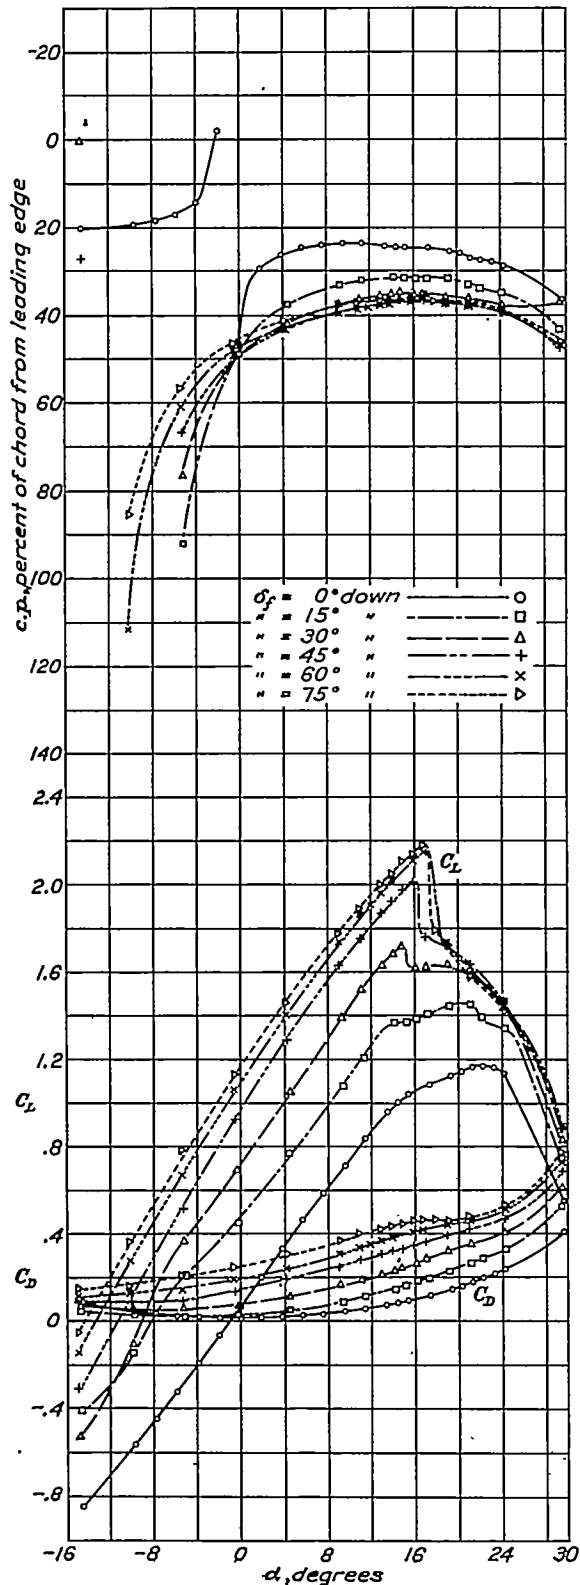


FIGURE 25.—Lift, drag, and center of pressure for the N. A. C. A. 23021 airfoil with 0.20c full-span ordinary flap. Flap gap sealed.

more, recent tests in the variable-density tunnel show that at large as well as at small Reynolds Numbers the N. A. C. A. 23021 airfoil has considerably lower

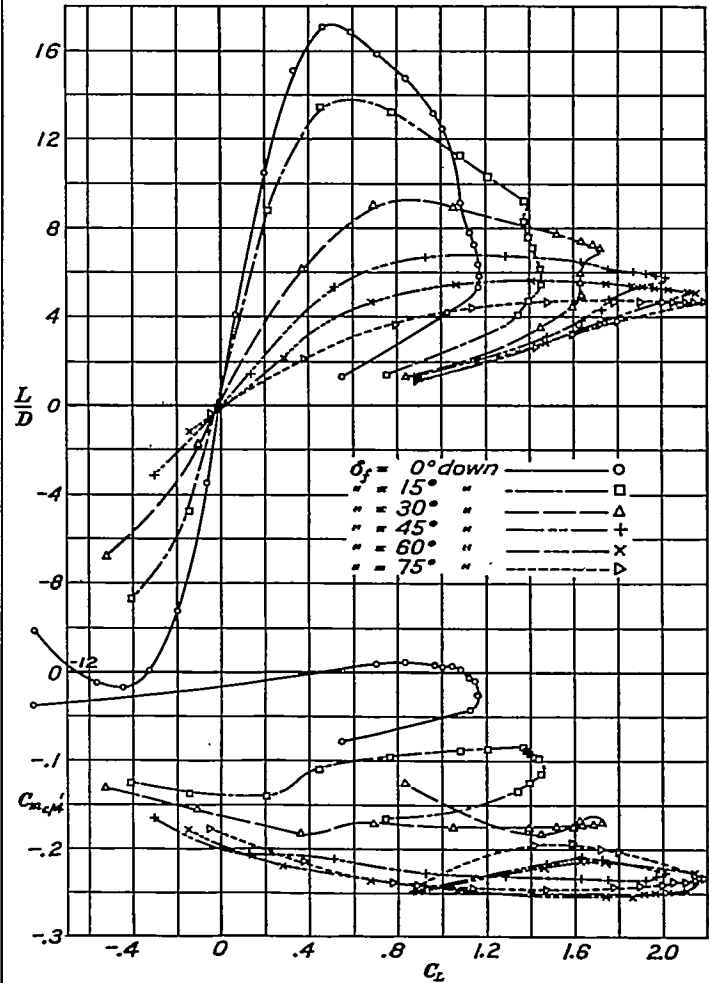


FIGURE 26.—Lift-drag ratio and pitching-moment coefficient for the N. A. C. A. 23021 airfoil with 0.20c full-span ordinary flap. Flap gap sealed.

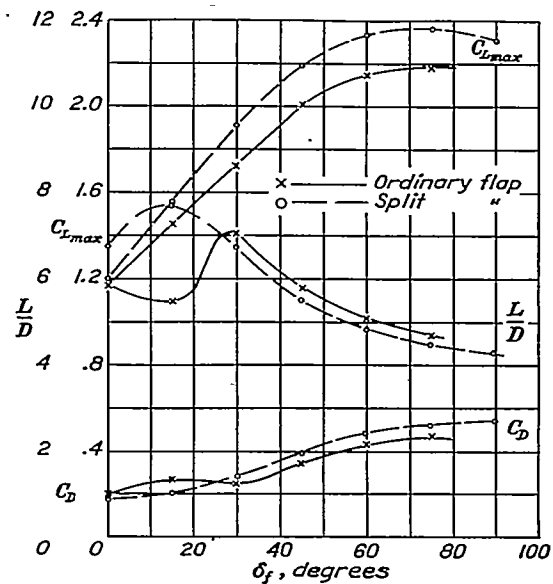


FIGURE 27.—Effect of flap deflection on maximum lift, and on lift-drag ratio and drag at maximum lift. The 0.20c full-span ordinary and split flaps on the N. A. C. A. 23021 airfoil.

vantages over the Clark Y or N. A. C. A. 23021 wings in the full-scale range of the Reynolds Number that

are not shown by low-scale tests if the lift increments due to the flaps are not adversely affected. Experimental data (unpublished) have shown that actually the increments in maximum lift due to split flaps on medium-thick airfoils vary but little with Reynolds Number. In connection with the present investigation, a few tests were made in the variable-density tunnel to determine the scale effect on  $C_{L_{max}}$  at high

(Effective Reynolds Number = test  $R \times \frac{\text{critical } R \text{ free air}}{\text{critical } R \text{ tunnel}}$ ) See reference 7.) The value of the factor is 1.4 for the 7- by 10-foot wind tunnel and 2.6 for the variable-density wind tunnel. The data show that the scale effect is about the same for the N. A. C. A. 23021 airfoil with the flap deflected downward  $75^\circ$  as it is for

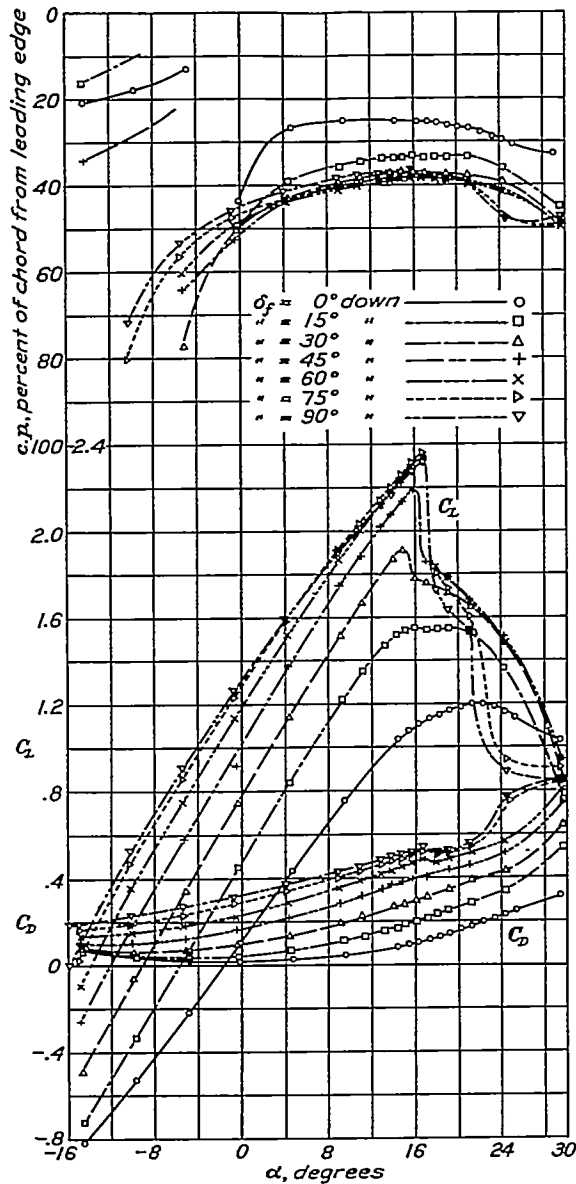


FIGURE 28.—Lift, drag, and center of pressure for the N. A. C. A. 23021 airfoil with 0.20c full-span split flap.

Reynolds Numbers of the N. A. C. A. 23021 airfoil (a thick section) with a 20-percent-chord split flap. The results of the scale-effect tests are given in figure 30 in which  $C_{L_{max}}$  for the N. A. C. A. 23021 airfoil with the flap neutral and with the flap deflected downward  $75^\circ$  is plotted against "effective" Reynolds Number both for the 7- by 10-foot and the variable-density wind tunnels.

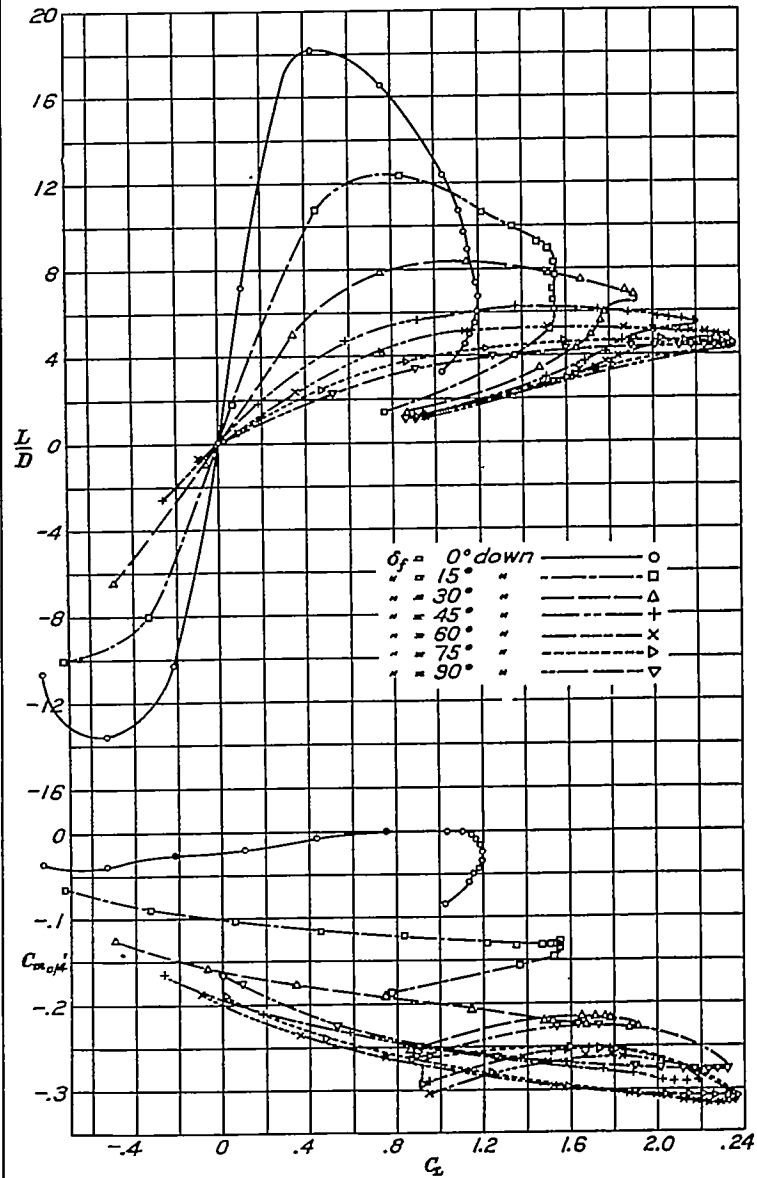


FIGURE 29.—Lift-drag ratio and pitching-moment coefficient for the N. A. C. A. 23021 airfoil with 0.20c full-span split flap.

the plain airfoil and that the increment in  $C_{L_{max}}$  due to the deflected split flap is, therefore, practically independent of scale effect. It seems fairly well established that increments of  $C_{L_{max}}$  due to split flaps on medium-thick and thick airfoils are independent of scale effect, so that values of the increments obtained at the relatively low scale of the present tests may be directly applied to full-scale wings.

TABLE I

COMPARISON OF CLARK Y, N. A. C. A. 23012, AND N. A. C. A. 23021 AIRFOILS WITH BOTH ORDINARY AND SPLIT 0.20c FLAPS

[The 7- by 10-foot wind tunnel. R. 609, 000]

Type of flap	Flap neutral		Flap deflected			
	$C_{L_{max}}$	$C_{L_{max}}/C_{D_{min}}$	$C_{L_{max}}$	$\Delta C_{L_{max}}$	$*C_{L_{max}}/C_{D_{min}}$	$L/D$ at $C_{L_{max}}$
Clark Y						
Ordinary.....	1.250	89.4	2.105	0.765	144	4.8
Split.....	1.250	89.4	2.118	.868	151	4.8
N. A. C. A. 23012						
Ordinary.....	1.128	107	2.000	0.874	191	4.5
Split.....	1.128	107	2.100	.974	200	4.5
N. A. C. A. 23021						
Ordinary.....	1.170	73.2	2.187	1.017	137	4.6
Split.....	1.170	73.2	2.363	1.193	148	4.6

\*  $C_{D_{min}}$  values for flap neutral.

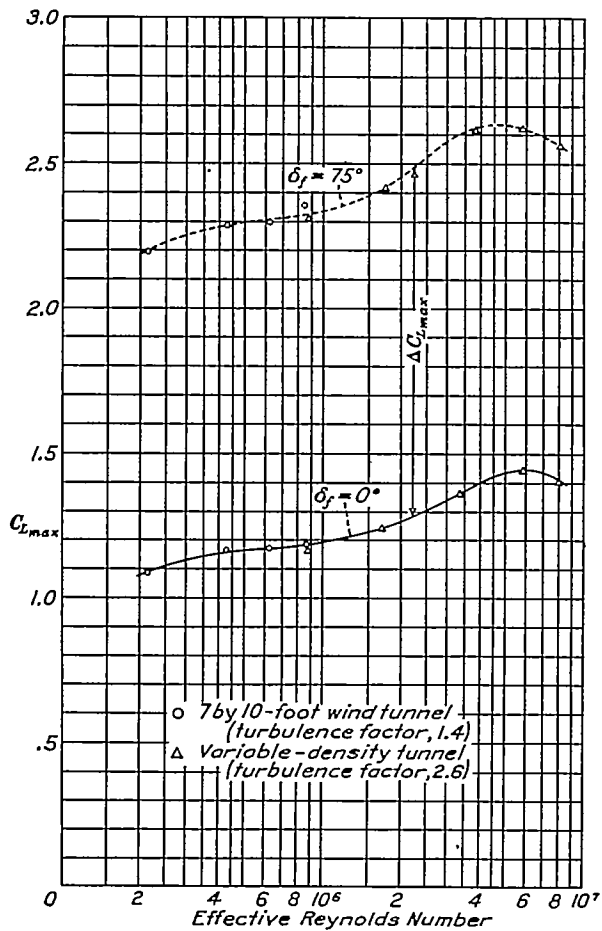


FIGURE 30.—Scale effect on maximum lift coefficient of the N. A. C. A. 23021 airfoil with 0.20c split flap neutral and deflected 75°.

Hinge moments of ordinary flaps.—The hinge moments were obtained for the three widths of ordinary flap on the Clark Y airfoil. These results are given in figures 31, 32, and 33 as coefficients of flap hinge

moment against flap deflection for various angles of attack. Comparison of hinge-moment coefficients for the three widths of ordinary flap indicates that they are practically independent of the flap chord. Comparison of the hinge-moment coefficients of ordinary flaps with those of the split flaps given in reference

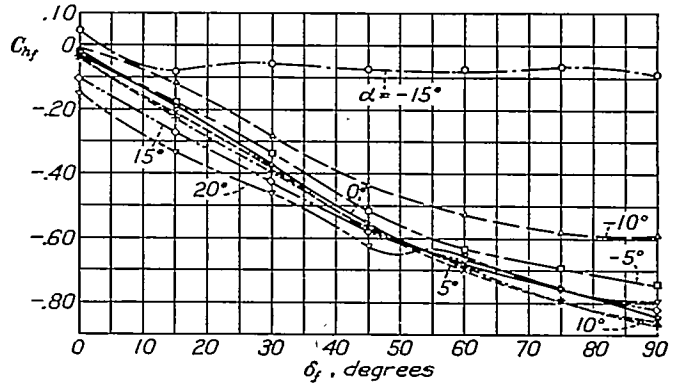


FIGURE 31.—Hinge-moment coefficients of 0.10c full-span ordinary flap on the Clark Y airfoil. Flap gap sealed.

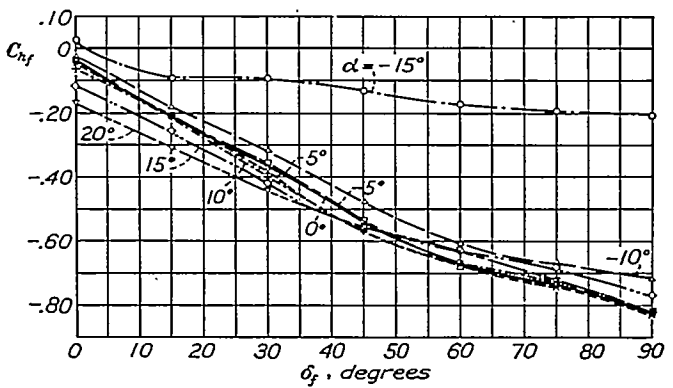


FIGURE 32.—Hinge-moment coefficients of 0.20c full-span ordinary flap on the Clark Y airfoil. Flap gap sealed.

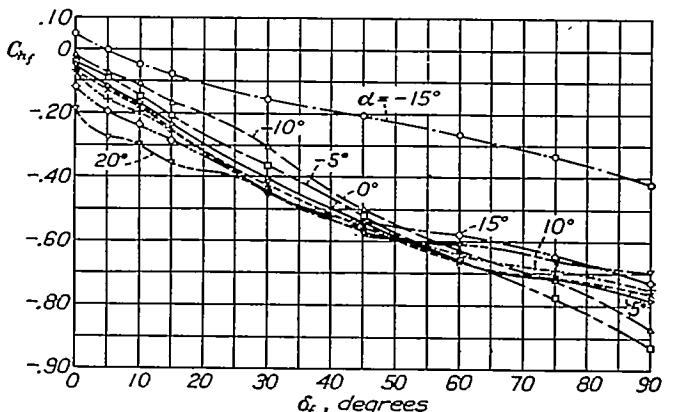


FIGURE 33.—Hinge-moment coefficients of 0.30c full-span ordinary flap on the Clark Y airfoil. Flap gap sealed.

2 indicates also that the hinge-moment coefficients are practically the same for the two types of flap. The actual hinge moments in inch-pounds are plotted against flap chord to a logarithmic scale in figure 34 for different deflections of the ordinary flaps and for several angles of attack. The slope of these curves is approximately 2, indicating that the actual hinge

moment varies as the square of the flap chord for a given flap deflection.

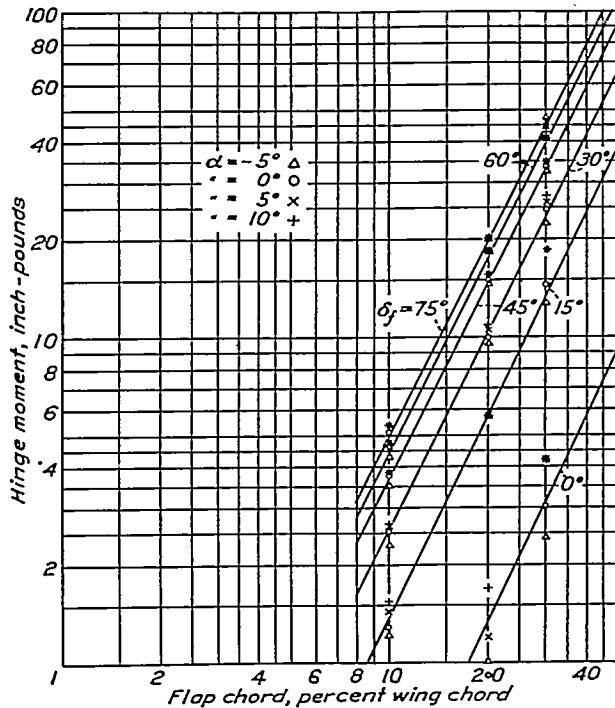


FIGURE 34.—Variation of hinge moment with flap chord for full-span ordinary flaps on the Clark Y airfoil.  $q=16.37$  lb./sq. ft.

**CONCLUSIONS**

1. Full-span split flaps produced somewhat greater increases in  $C_{L_{max}}$  of the three airfoils tested than did full-span ordinary flaps of the same width, but the  $L/D$  at  $C_{L_{max}}$  was practically the same for the two types of flap.

2. Based principally on the speed-range ratio  $C_{L_{max}}/C_{D_{min}}$ , the relative order of merit of the airfoils tested with either ordinary or split flaps is N. A. C. A. 23012, Clark Y, and N. A. C. A. 23021.

3. Any gap between the wing and the leading edge of ordinary flaps had a very detrimental effect on the  $C_{L_{max}}$  attainable.

4. The hinge-moment coefficients of the full-span ordinary flaps were practically independent of flap chord; the actual hinge moments varied approximately as the square of the flap chord. Both of these findings accord with theory.

5. The hinge-moment coefficients of the full-span ordinary flaps were practically the same as those of split flaps of similar size.

LANGLEY MEMORIAL AERONAUTICAL LABORATORY,  
 NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS,  
 LANGLEY FIELD, VA., October 25, 1935.

**REFERENCES**

1. Harris, Thomas A.: The 7 by 10 Foot Wind Tunnel of the National Advisory Committee for Aeronautics. T. R. No. 412, N. A. C. A., 1931.
2. Wenzinger, Carl J.: Wind-Tunnel Measurements of Air Loads on Split Flaps. T. N. No. 498, N. A. C. A., 1934.
3. Theodorsen, Theodore: Interference on an Airfoil of Finite Span in an Open Rectangular Wind Tunnel. T. R. No. 461, N. A. C. A., 1933.
4. Glauert, H.: Wind Tunnel Interference on Wings, Bodies, and Airscrews. R. & M. No. 1566, British A. R. C., 1933.
5. Gruschwitz, Eugen, and Schrenk, Oskar: A Simple Method for Increasing the Lift of Airplane Wings by Means of Flaps. T. M. No. 714, N. A. C. A., 1933.
6. Weick, Fred E., and Harris, Thomas A.: The Aerodynamic Characteristics of a Model Wing Having a Split Flap Deflected Downward and Moved to the Rear. T. N. No. 422, N. A. C. A., 1932.
7. Jacobs, Eastman N., and Clay, William C.: Characteristics of the N. A. C. A. 23012 Airfoil from Tests in the Full-Scale and Variable-Density Tunnels. T. R. No. 530, N. A. C. A., 1935.