

REPORT No. 903

THEORETICAL AND EXPERIMENTAL DATA FOR A NUMBER OF NACA 6A-SERIES AIRFOIL SECTIONS

By LAURENCE K. LOFTIN, Jr.

SUMMARY

The NACA 6A-series airfoil sections were designed to eliminate the trailing-edge cusp which is characteristic of the NACA 6-series sections. Theoretical data are presented for NACA 6A-series basic thickness forms having the position of minimum pressure at 30, 40, and 50 percent chord and with thickness ratios varying from 6 percent to 15 percent. Also presented are data for a mean line designed to maintain straight sides on the cambered sections.

The experimental results of a two-dimensional wind-tunnel investigation of the aerodynamic characteristics of five NACA 64A-series airfoil sections and two NACA 63A-series airfoil sections are presented. An analysis of these results, which were obtained at Reynolds numbers of 3×10^6 , 6×10^6 , and 9×10^6 , indicates that the section minimum-drag and maximum-lift characteristics of comparable NACA 6-series and 6A-series airfoil sections are essentially the same. The quarter-chord pitching-moment coefficients and angles of zero lift of NACA 6A-series airfoil sections are slightly more negative than those of corresponding NACA 6-series airfoil sections. The position of the aerodynamic center and the lift-curve slope of smooth NACA 6A-series airfoil sections appear to be essentially independent of airfoil thickness ratio in contrast to the trends shown by NACA 6-series sections. The addition of standard leading-edge roughness causes the lift-curve slope of the newer sections to decrease with increasing airfoil thickness ratio.

INTRODUCTION

Much interest is being shown in airfoil sections having small thickness ratios because of their high critical Mach numbers. The NACA 6-series airfoil sections of small thickness have relatively high critical Mach numbers but have the disadvantage of being very thin near the trailing edge, particularly when the sections considered have the position of minimum pressure well forward on the basic thickness form. The thin trailing-edge portions lead to difficulties in structural design and fabrication. In order to overcome these difficulties, the trailing-edge cusp has been removed from a number of NACA 6-series basic thickness forms and the sides of the airfoil sections made straight from approximately 80 percent chord to the trailing edge. These new sections are designated NACA 6A-series airfoil sections. A special mean line, designated the $a=0.8$ (modified) mean

line, has also been designed to maintain straight sides on the cambered sections.

This paper presents theoretical pressure-distribution data and ordinates for NACA 6A-series basic thickness forms covering a range of thickness ratios extending from 6 to 15 percent and a range of positions of minimum pressure extending from 30 percent to 50 percent chord.

The aerodynamic characteristics of seven NACA 6A-series airfoil sections as determined in the Langley two-dimensional low-turbulence pressure tunnel are also presented. These data are analyzed and compared with similar data for NACA 6-series airfoil sections of comparable thickness and design lift coefficient.

COEFFICIENTS AND SYMBOLS

c_d	section drag coefficient
$c_{d_{min}}$	minimum section drag coefficient
c_l	section lift coefficient
c_{l_d}	design section lift coefficient
$c_{l_{max}}$	maximum section lift coefficient
$c_{m_{ac}}$	section pitching-moment coefficient about aerodynamic center
$c_{m_{c/4}}$	section pitching-moment coefficient about quarter-chord point
α_0	section angle of attack
α_i	section angle of attack corresponding to design lift coefficient
$\frac{dc_l}{d\alpha_0}$	section lift-curve slope
V	free-stream velocity
v	local velocity
Δv	increment of local velocity
Δv_a	increment of local velocity caused by additional type of load distribution
P_R	resultant pressure coefficient; difference between local upper-surface and lower-surface pressure coefficients
R	Reynolds number
c	airfoil chord length
x	distance along chord from leading edge
y	distance perpendicular to chord
y_c	mean-line ordinate
a	mean-line designation; fraction of chord from leading edge over which design load is uniform
ψ	airfoil design parameter (reference 1)

THEORETICAL CHARACTERISTICS OF AIRFOILS

Designation.—The system used for designating the new airfoil sections is the same as that employed for the NACA 6-series sections (reference 1) except that the capital letter "A" is substituted for the dash which appears between the digit denoting the position of minimum pressure and that denoting the ideal lift coefficient. For example, the NACA 64₁-212 becomes the NACA 64₁A212 when the cusp is removed from the trailing edge. In the absence of any further modification of the designation, the cambered airfoils are to be considered as having the $\alpha=0.8$ (modified) mean line.

Basic thickness forms.—The theoretical methods by which the basic thickness forms of the NACA 6-series family of airfoil sections were derived in order to have pressure distributions of a specified type are described in reference 1. Removing the trailing-edge cusp was accomplished by increasing the value of the airfoil design parameter ψ (reference 1) corresponding to the rear portion of the airfoil until the airfoil ordinates formed a straight line from approximately 80 percent chord to the trailing edge. Once the final form of the ψ curves was established, the new pressure distribu-

tions corresponding to the modified thickness forms were calculated by the usual methods as described in reference 1.

A comparison of the theoretical pressure distributions of an NACA 64₁-012 airfoil section and an NACA 64₁A012 airfoil section (fig. 1) indicates that removing the trailing-edge cusp has little effect upon the velocities around the section. A slight reduction of the peak negative pressure and flatter pressure gradient over the forward and rearward portions of the airfoil section seem to be the principal effects. The theoretical calculations also indicate the presence of a trailing-edge stagnation point caused by the finite trailing-edge angle of the NACA 6A-series sections. This stagnation point is, of course, never realized experimentally.

Ordinates and theoretical pressure-distribution data for NACA 6A-series basic thickness forms having the position of minimum pressure at 30, 40, and 50 percent chord are presented in figure 2 for airfoil thickness ratios of 6, 8, 10, 12, and 15 percent. If intermediate thickness ratios involving a change in thickness of not more than 1 to 2 percent are desired, the ordinates of the basic thickness forms may be scaled linearly without seriously altering the gradients of the theoretical pressure distribution.


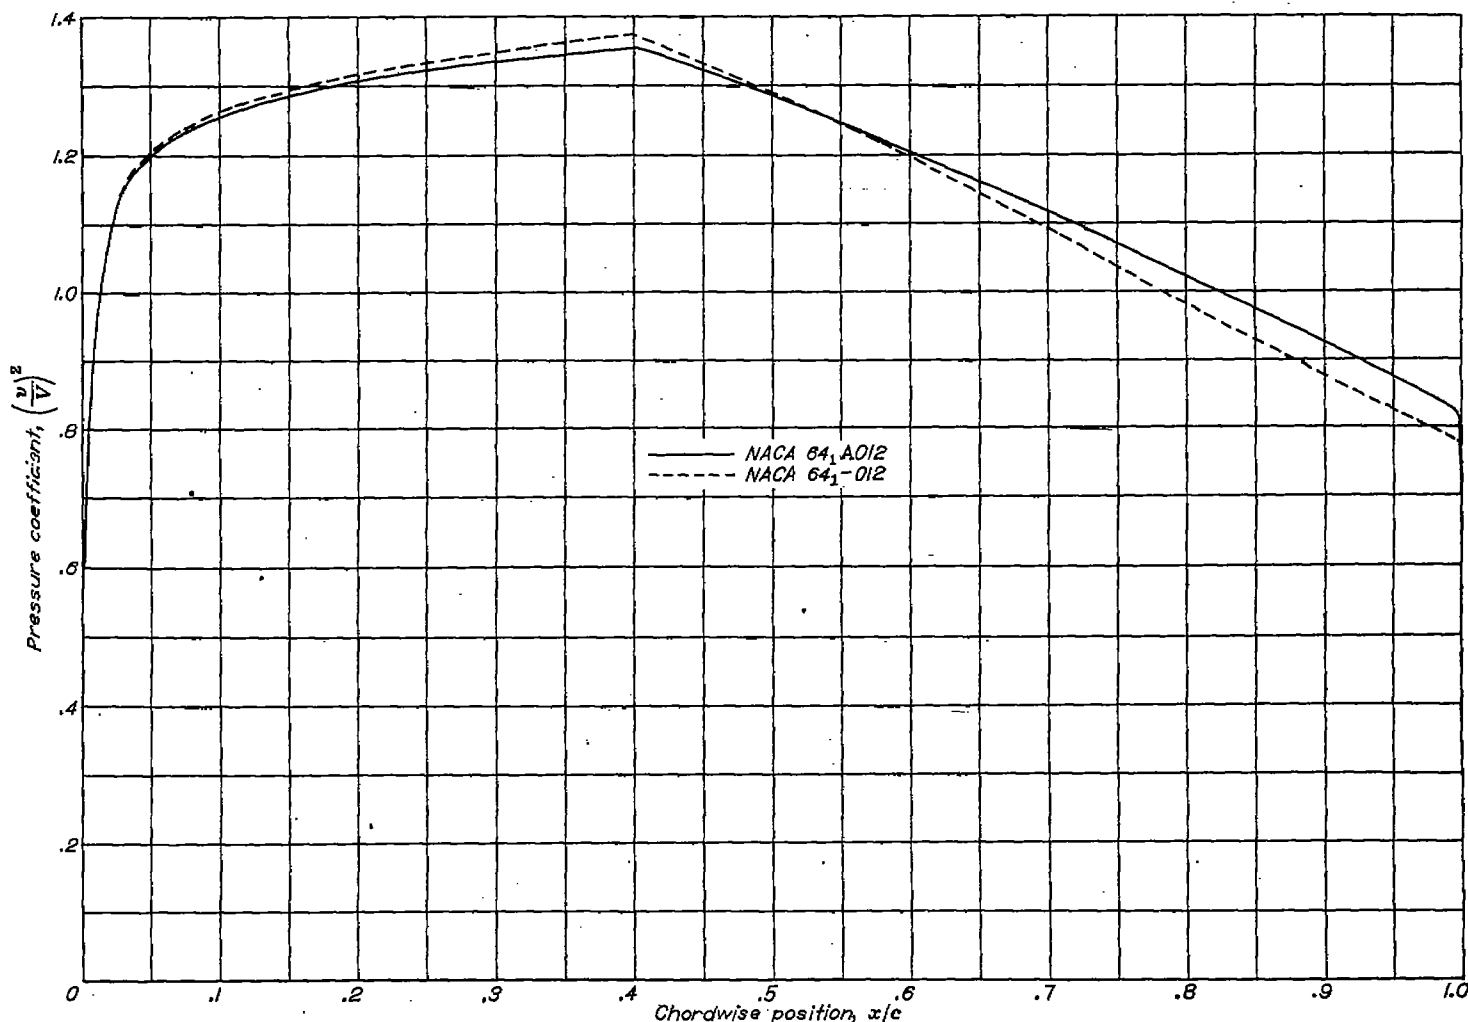


FIGURE 1.—Comparison of theoretical pressure distribution at zero lift of the NACA 64₁-012 and the NACA 64₁A012 airfoil sections.

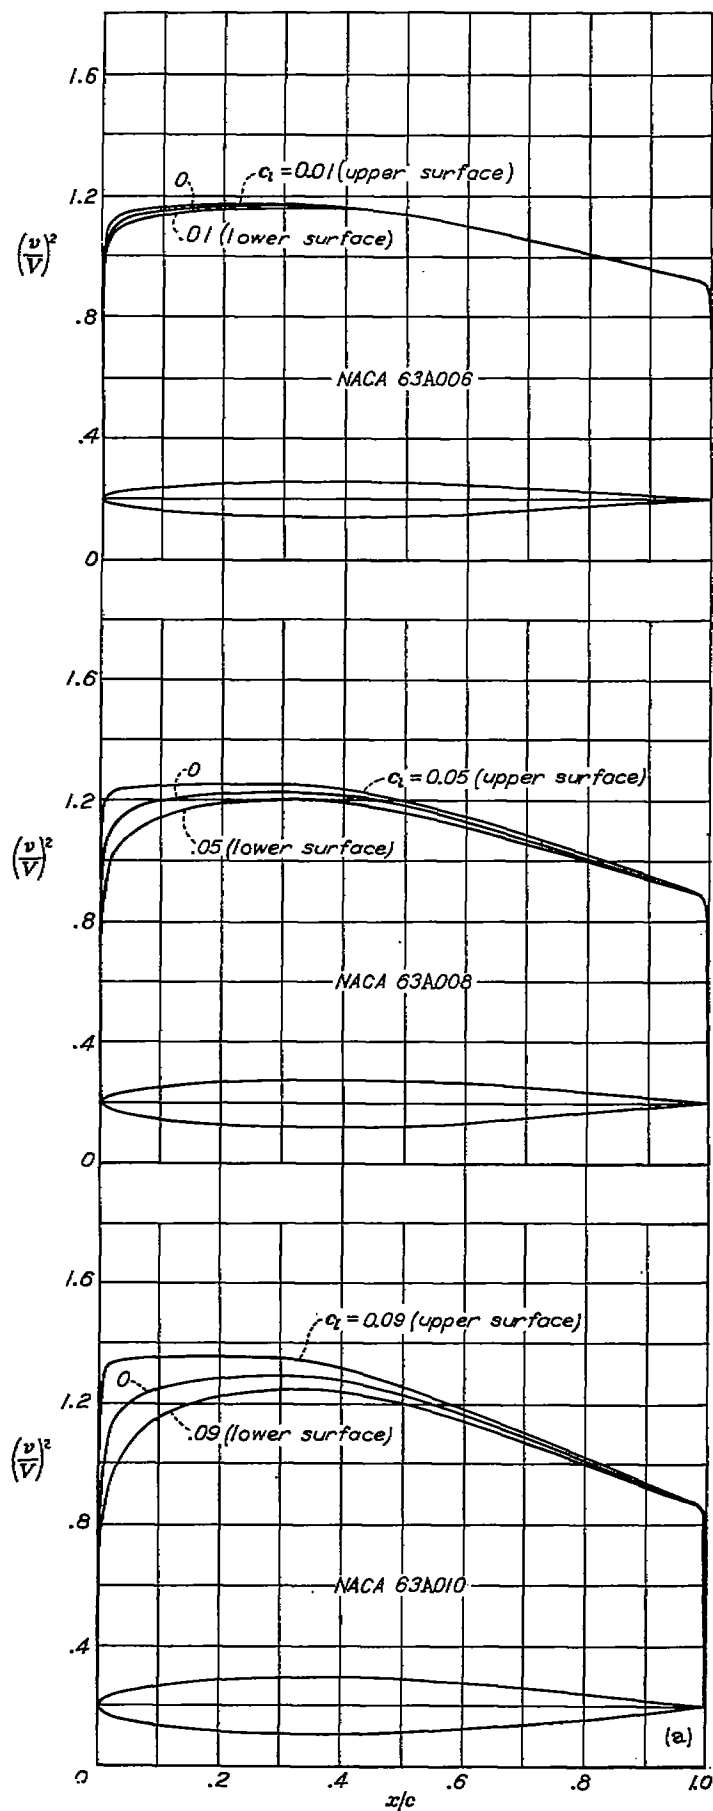

NACA 63A006 BASIC THICKNESS FORM

x (percent c)	y (percent c)	$(v/V)^2$	v/V	$\Delta v/V$
0	0	0	0	4.580
.5	.495	.900	.949	2.079
.75	.695	1.083	1.041	1.794
1.25	.754	1.086	1.042	1.370
2.5	1.045	1.112	1.055	.976
5.0	1.447	1.134	1.065	.693
7.5	1.747	1.142	1.069	.583
10	1.989	1.150	1.072	.493
15	2.362	1.159	1.077	.383
20	2.681	1.165	1.079	.321
25	2.820	1.168	1.081	.278
30	2.942	1.170	1.082	.244
35	2.996	1.169	1.081	.217
40	2.985	1.162	1.078	.195
45	2.914	1.151	1.073	.176
50	2.788	1.138	1.067	.158
55	2.613	1.120	1.058	.140
60	2.398	1.100	1.049	.126
65	2.143	1.079	1.039	.112
70	1.869	1.057	1.028	.098
75	1.566	1.035	1.017	.085
80	1.248	1.010	1.005	.072
85	.939	.986	.993	.060
90	.630	.964	.982	.047
95	.322	.939	.969	.033
100	.018	0	0	0

L. E. radius: 0.255 percent c
 T. E. radius: 0.014 percent c

NACA 63A008 BASIC THICKNESS FORM

x (percent c)	y (percent c)	$(v/V)^2$	v/V	$\Delta v/V$
0	0	0	0	3.465
.5	.638	.850	.922	1.661
.75	.791	1.034	1.017	1.674
1.25	1.003	1.080	1.039	1.344
2.5	1.391	1.132	1.064	.967
5.0	1.930	1.188	1.091	.689
7.5	2.332	1.185	1.089	.562
10	2.658	1.198	1.095	.484
15	3.155	1.212	1.101	.393
20	3.515	1.221	1.105	.322
25	3.766	1.227	1.108	.279
30	3.926	1.230	1.109	.246
35	3.995	1.228	1.108	.218
40	3.978	1.219	1.104	.195
45	3.878	1.204	1.097	.174
50	3.705	1.183	1.088	.158
55	3.468	1.159	1.077	.138
60	3.176	1.132	1.064	.123
65	2.837	1.104	1.051	.109
70	2.457	1.073	1.036	.096
75	2.055	1.042	1.021	.082
80	1.647	1.010	1.005	.070
85	1.240	.980	.990	.058
90	.833	.951	.975	.045
95	.425	.919	.959	.030
100	.018	0	0	0

L. E. radius: 0.473 percent c
 T. E. radius: 0.020 percent c


NACA 63A010 BASIC THICKNESS FORM

x (percent c)	y (percent c)	$(v/V)^2$	v/V	$\Delta v/V$
0	0	0	0	2.805
.5	.816	.774	.880	1.833
.75	.983	.985	.992	1.594
1.25	1.280	1.043	1.021	1.307
2.5	1.737	1.140	1.068	.987
5.0	2.412	1.200	1.095	.694
7.5	2.917	1.225	1.107	.500
10	3.324	1.246	1.116	.453
15	3.950	1.263	1.128	.383
20	4.400	1.262	1.132	.324
25	4.714	1.250	1.136	.280
30	4.913	1.234	1.138	.247
35	4.995	1.201	1.136	.218
40	4.968	1.279	1.131	.195
45	4.837	1.253	1.122	.174
50	4.613	1.220	1.109	.155
55	4.311	1.196	1.094	.137
60	3.943	1.162	1.073	.122
65	3.517	1.125	1.061	.109
70	3.044	1.086	1.042	.094
75	2.545	1.043	1.024	.081
80	2.040	1.009	1.004	.068
85	1.535	.972	.985	.057
90	1.030	.938	.969	.044
95	.525	.900	.949	.030
100	.021	0	0	0

L. E. radius: 0.742 percent c
 T. E. radius: 0.023 percent c

FIGURE 2—NACA 6A-series basic thickness forms.

NACA 63₁A012 BASIC THICKNESS FORM

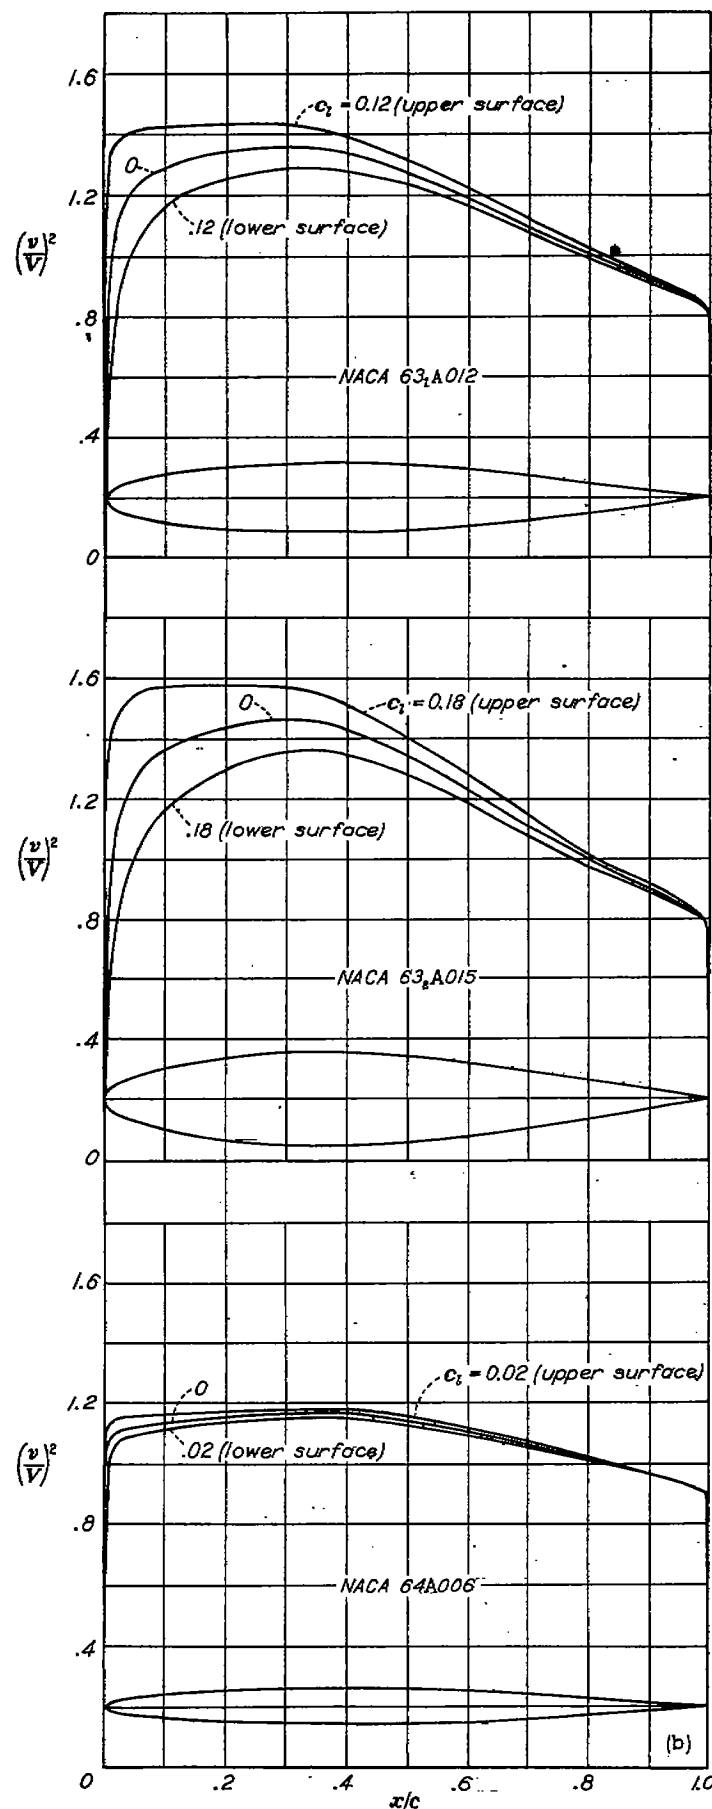

x (percent c)	y (percent c)	$(v/V)^2$	u/V	$\Delta c_d/V$
0	0	0	0	2.361
.5	.973	.686	.828	1.701
.75	1.173	.924	.961	1.516
1.25	1.492	.985	.982	1.258
2.5	2.078	1.136	1.066	.935
5.0	2.895	1.229	1.109	.679
7.5	3.504	1.265	1.125	.589
10	3.994	1.291	1.136	.482
15	4.747	1.324	1.161	.384
20	5.287	1.344	1.189	.326
25	5.664	1.355	1.164	.281
30	5.901	1.360	1.166	.248
35	5.995	1.357	1.165	.219
40	5.957	1.340	1.158	.190
45	5.792	1.312	1.145	.174
50	5.517	1.275	1.129	.154
55	5.148	1.234	1.111	.136
60	4.700	1.191	1.091	.120
65	4.186	1.145	1.070	.106
70	3.621	1.098	1.048	.092
75	3.026	1.051	1.025	.079
80	2.426	1.007	1.003	.066
85	1.826	.964	.982	.055
90	1.225	.925	.962	.042
95	.625	.880	.938	.029
100	.025	0	0	0

L. E. radius: 1.071 percent c
T. E. radius: 0.028 percent c

NACA 63₂A015 BASIC THICKNESS FORM

x (percent c)	y (percent c)	$(v/V)^2$	u/V	$\Delta c_d/V$
0	0	0	0	1.930
.5	1.208	.550	.742	1.504
.75	1.448	.825	.908	1.370
1.25	1.844	.882	.939	1.176
2.5	2.579	1.120	1.058	.905
5.0	3.618	1.267	1.121	.609
7.5	4.382	1.323	1.150	.555
10	4.997	1.361	1.167	.452
15	5.942	1.408	1.187	.384
20	6.619	1.437	1.199	.326
25	7.091	1.455	1.206	.262
30	7.384	1.464	1.210	.250
35	7.496	1.458	1.207	.220
40	7.435	1.435	1.198	.190
45	7.215	1.396	1.182	.174
50	6.858	1.349	1.161	.162
55	6.387	1.296	1.138	.134
60	5.820	1.237	1.112	.118
65	5.173	1.175	1.084	.104
70	4.408	1.118	1.056	.090
75	3.731	1.065	1.027	.077
80	2.981	1.006	1.000	.064
85	2.282	.950	.975	.062
90	1.512	.900	.949	.040
95	.772	.850	.922	.028
100	.032	0	0	0

L. E. radius: 1.630 percent c
T. E. radius: 0.037 percent c

NACA 64A006 BASIC THICKNESS FORM

x (percent c)	y (percent c)	$(v/V)^2$	u/V	$\Delta c_d/V$
0	0	0	0	4.688
.5	.485	1.019	1.009	2.101
.75	.585	1.046	1.023	1.798
1.25	.739	1.076	1.037	1.422
2.5	1.018	1.106	1.062	.930
5.0	1.399	1.118	1.087	.694
7.5	1.684	1.126	1.061	.564
10	1.919	1.132	1.064	.482
15	2.283	1.141	1.068	.382
20	2.567	1.149	1.072	.321
25	2.767	1.154	1.074	.278
30	2.896	1.158	1.076	.246
35	2.977	1.162	1.078	.219
40	2.999	1.165	1.079	.197
45	2.945	1.156	1.075	.177
50	2.826	1.142	1.069	.159
55	2.653	1.125	1.061	.143
60	2.438	1.107	1.052	.126
65	2.188	1.087	1.043	.112
70	1.907	1.066	1.032	.099
75	1.602	1.043	1.021	.087
80	1.285	1.018	1.009	.074
85	.987	.992	.996	.061
90	.649	.964	.982	.047
95	.381	.935	.967	.033
100	.013	0	0	0


L. E. radius: 0.246 percent c
T. E. radius: 0.014 percent c

FIGURE 2.—Continued.

THEORETICAL AND EXPERIMENTAL DATA FOR A NUMBER OF NACA 6A-SERIES AIRFOIL SECTIONS

207


NACA 64A008 BASIC THICKNESS FORM

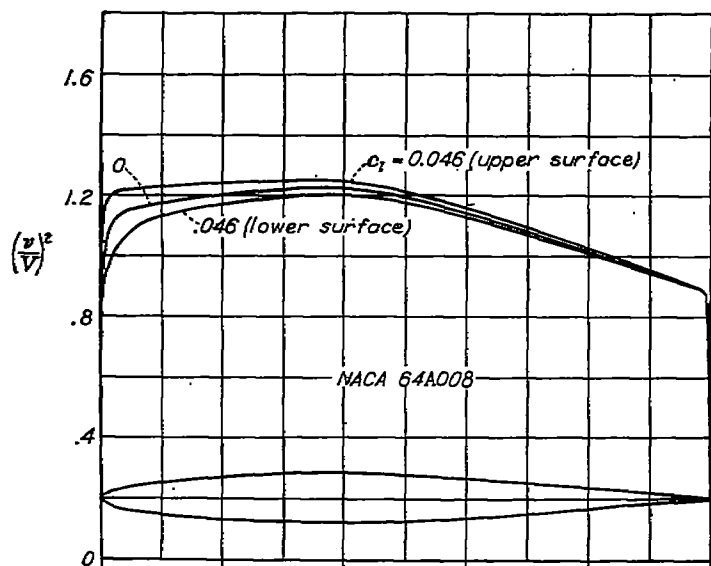

x (percent c)	y (percent c)	$(v/V)^2$	w/V	$\Delta x_d/V$
0	0	0	0	3.546
.5	.646	.947	.973	1.972
.75	.778	1.006	1.032	1.667
1.25	.983	1.068	1.033	1.352
2.5	1.353	1.122	1.059	.971
5.0	1.823	1.151	1.073	.692
7.5	2.245	1.185	1.079	.584
10	2.559	1.176	1.064	.481
15	3.047	1.191	1.061	.382
20	3.414	1.201	1.066	.323
25	3.681	1.209	1.100	.279
30	3.886	1.217	1.103	.247
35	3.972	1.221	1.105	.221
40	3.998	1.225	1.107	.198
45	3.921	1.211	1.100	.177
50	3.757	1.191	1.091	.158
55	3.524	1.167	1.080	.141
60	3.234	1.141	1.068	.125
65	2.897	1.113	1.055	.111
70	2.521	1.084	1.041	.098
75	2.117	1.053	1.026	.084
80	1.698	1.020	1.010	.072
85	1.278	.987	.993	.059
90	.858	.951	.975	.045
95	.438	.914	.956	.032
100	.018	0	0	0

L. E. radius: 0.439 percent c
 T. E. radius: 0.020 percent c


NACA 64A010 BASIC THICKNESS FORM

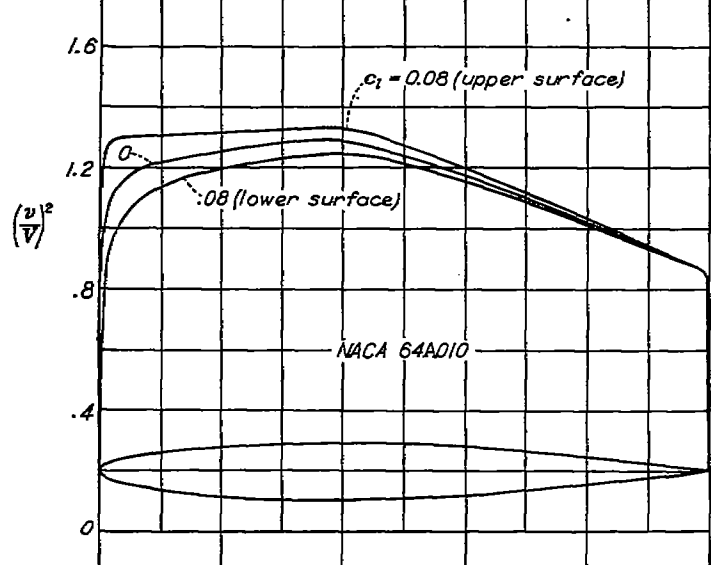

x (percent c)	y (percent c)	$(v/V)^2$	w/V	$\Delta x_d/V$
0	0	0	0	2.863
.5	.804	.888	.932	1.845
.75	.969	.952	.976	1.603
1.25	1.225	1.042	1.021	1.300
2.5	1.698	1.130	1.063	.957
5.0	2.327	1.178	1.085	.688
7.5	2.805	1.201	1.096	.602
10	3.199	1.217	1.108	.480
15	3.813	1.238	1.113	.382
20	4.272	1.254	1.120	.324
25	4.606	1.265	1.125	.290
30	4.837	1.275	1.129	.245
35	4.968	1.282	1.132	.221
40	4.895	1.285	1.135	.199
45	4.894	1.268	1.126	.177
50	4.684	1.240	1.114	.168
55	4.388	1.208	1.099	.140
60	4.021	1.174	1.084	.124
65	3.597	1.139	1.067	.109
70	3.127	1.102	1.050	.096
75	2.623	1.063	1.031	.083
80	2.103	1.023	1.011	.070
85	1.682	.981	.990	.058
90	1.062	.933	.969	.044
95	.641	.896	.945	.031
100	.021	0	0	0

L. E. radius: 0.687 percent c
 T. E. radius: 0.023 percent c

NACA 64A012 BASIC THICKNESS FORM

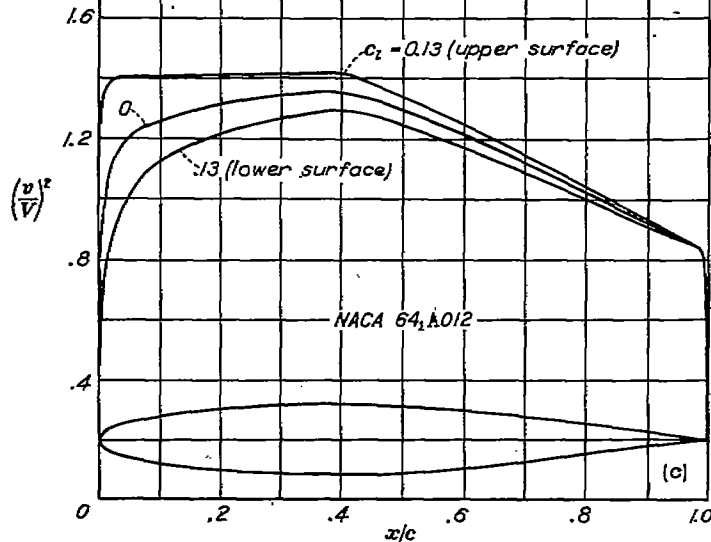


x (percent c)	y (percent c)	$(v/V)^2$	w/V	$\Delta x_d/V$
0	0	0	0	2.408
.5	.961	.792	.890	1.720
.75	1.158	.893	.945	1.515
1.25	1.454	1.006	1.003	1.254
2.5	2.018	1.127	1.062	.941
5.0	2.788	1.201	1.096	.681
7.5	3.384	1.235	1.111	.560
10	3.839	1.257	1.121	.478
15	4.580	1.258	1.135	.383
20	5.132	1.308	1.144	.325
25	5.584	1.324	1.151	.281
30	5.809	1.336	1.156	.249
35	5.965	1.346	1.160	.221
40	5.993	1.354	1.164	.199
45	5.883	1.326	1.152	.177
50	5.606	1.289	1.135	.157
55	5.214	1.250	1.118	.139
60	4.801	1.207	1.099	.123
65	4.289	1.164	1.079	.108
70	3.721	1.118	1.057	.094
75	3.118	1.071	1.035	.080
80	2.500	1.023	1.011	.068
85	1.882	.974	.987	.056
90	1.263	.925	.962	.042
95	.644	.873	.934	.029
100	.025	0	0	0

L. E. radius: 0.994 percent c
 T. E. radius: 0.028 percent c

FIGURE 2.—Continued.


NACA 64A015 BASIC THICKNESS FORM

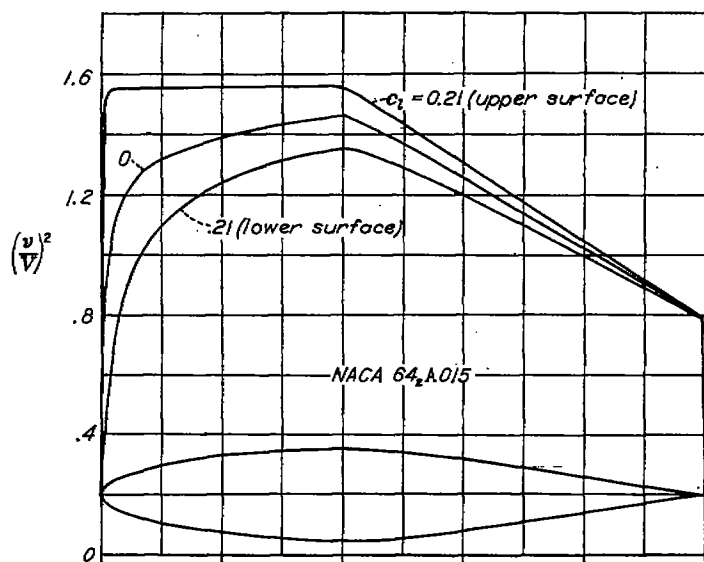

x (percent c)	y (percent c)	$(u/V)^2$	u/V	$\Delta s_s/V$
0	0	0	0	1.956
.5	1.198	.678	.823	1.532
.75	1.436	.789	.888	1.404
1.25	1.815	.936	.967	1.198
2.5	2.508	1.110	1.054	.912
5.0	3.477	1.226	1.107	.671
7.5	4.202	1.280	1.131	.552
10	4.799	1.314	1.146	.478
15	5.732	1.360	1.166	.384
20	6.428	1.390	1.179	.326
25	6.926	1.413	1.189	.283
30	7.270	1.430	1.196	.249
35	7.493	1.445	1.202	.222
40	7.487	1.458	1.207	.201
45	7.313	1.414	1.189	.177
50	6.978	1.364	1.168	.156
55	6.517	1.311	1.148	.137
60	5.956	1.255	1.120	.121
65	5.311	1.198	1.095	.106
70	4.600	1.139	1.067	.091
75	3.847	1.079	1.039	.078
80	3.084	1.020	1.010	.066
85	2.321	.961	.980	.053
90	1.558	.901	.949	.041
95	.795	.843	.918	.027
100	.032	0	0	0

L. E. radius: 1.561 percent c
 T. E. radius: 0.037 percent c


NACA 65A006 BASIC THICKNESS FORM

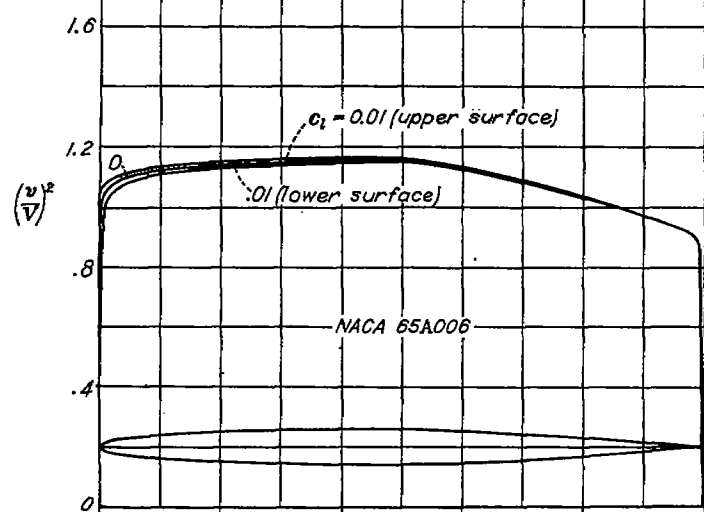

x (percent c)	y (percent c)	$(u/V)^2$	u/V	$\Delta s_s/V$
0	0	0	0	4.879
.5	.464	1.034	1.017	2.146
.75	.563	1.043	1.021	1.763
1.25	.718	1.058	1.029	1.365
2.5	.981	1.080	1.039	.966
5.0	1.313	1.101	1.049	.688
7.5	1.691	1.112	1.055	.502
10	1.824	1.120	1.058	.480
15	2.194	1.131	1.063	.382
20	2.474	1.139	1.067	.323
25	2.687	1.145	1.070	.278
30	2.842	1.149	1.072	.246
35	2.945	1.153	1.074	.219
40	2.996	1.157	1.076	.198
45	2.992	1.159	1.077	.178
50	2.925	1.157	1.076	.161
55	2.793	1.141	1.068	.143
60	2.602	1.124	1.060	.127
65	2.364	1.106	1.052	.112
70	2.087	1.083	1.041	.099
75	1.775	1.059	1.029	.087
80	1.437	1.032	1.016	.076
85	1.083	1.003	1.001	.061
90	.727	.973	.986	.047
95	.370	.936	.967	.033
100	.013	0	0	0

L. E. radius: 0.229 percent c
 T. E. radius: 0.014 percent c


NACA 65A008 BASIC THICKNESS FORM

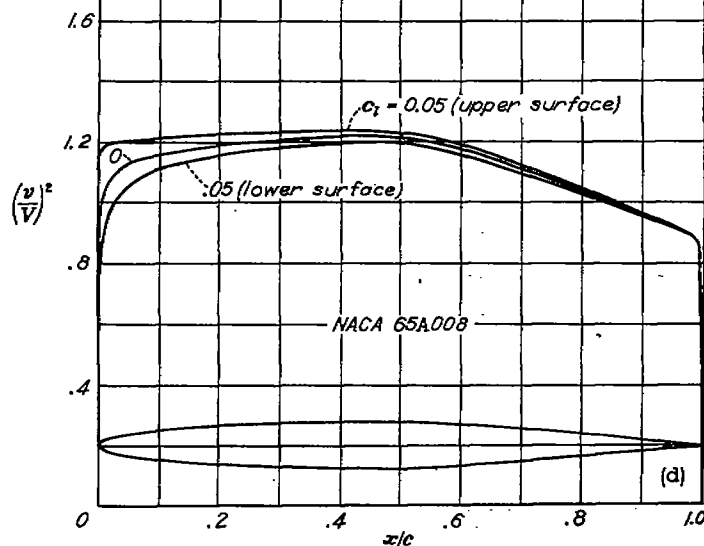

x (percent c)	y (percent c)	$(u/V)^2$	u/V	$\Delta s_s/V$
0	0	0	0	2.608
.5	.615	.973	.986	2.010
.75	.746	1.001	1.000	1.603
1.25	.951	1.038	1.019	1.333
2.5	1.308	1.089	1.043	.954
5.0	1.749	1.137	1.062	.636
7.5	2.120	1.145	1.070	.561
10	2.492	1.157	1.076	.478
15	2.926	1.175	1.084	.382
20	3.301	1.186	1.089	.322
25	3.585	1.195	1.093	.279
30	3.791	1.202	1.096	.247
35	3.923	1.207	1.099	.219
40	3.995	1.213	1.101	.198
45	3.988	1.217	1.103	.178
50	3.896	1.214	1.102	.161
55	3.714	1.191	1.091	.144
60	3.456	1.167	1.080	.128
65	3.186	1.139	1.067	.112
70	2.793	1.108	1.053	.098
75	2.348	1.076	1.037	.086
80	1.898	1.041	1.020	.073
85	1.430	1.002	1.001	.060
90	.960	.961	.980	.046
95	.490	.916	.957	.031
100	.018	0	0	0

L. E. radius: 0.408 percent c
 T. E. radius: 0.020 percent c

FIGURE 2.—Continued.

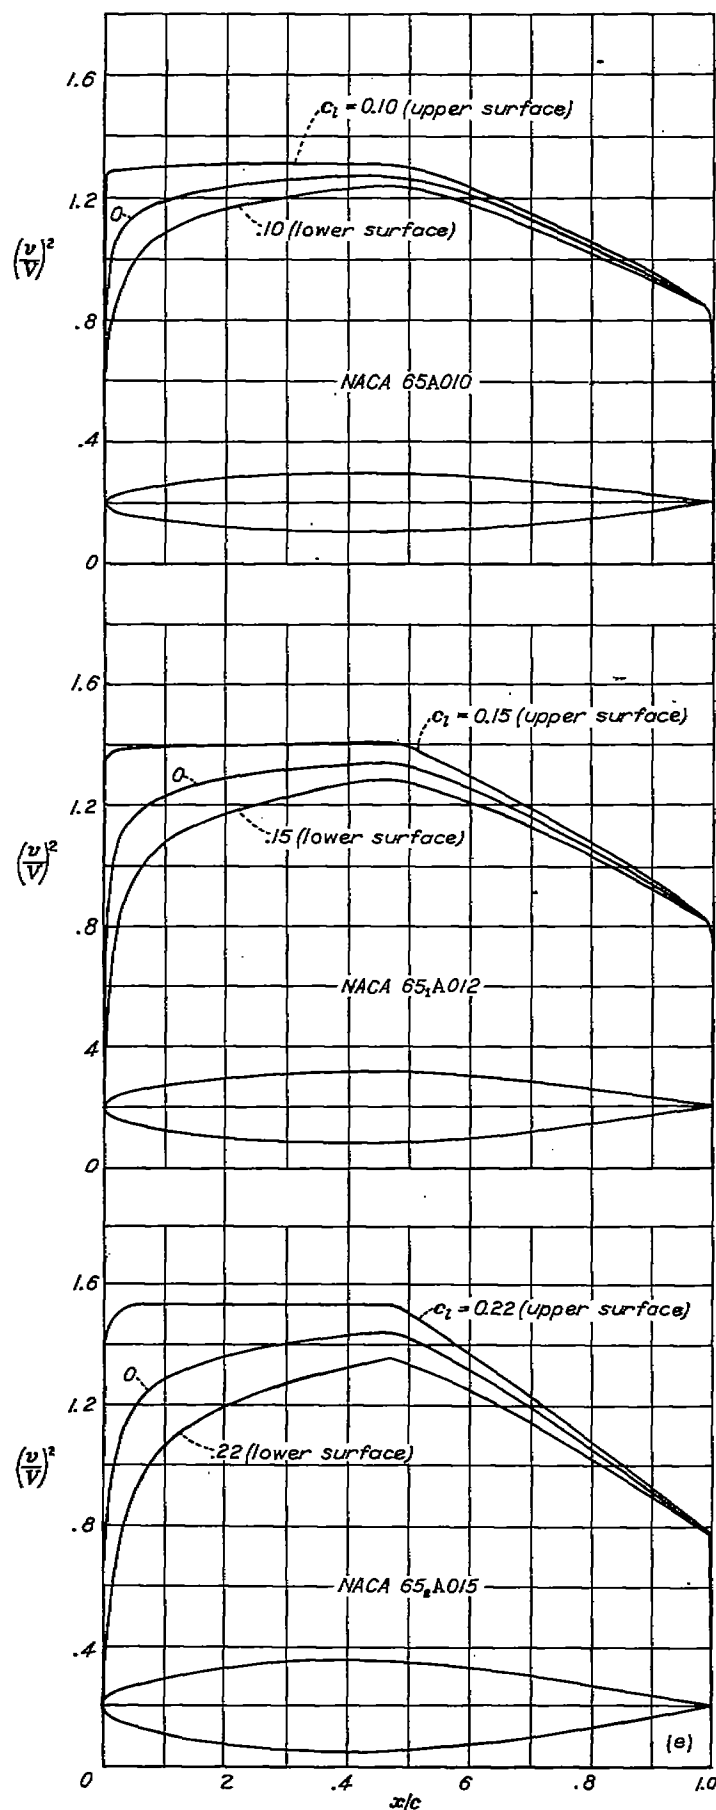

NACA 65A010 BASIC THICKNESS FORM

x (percent c)	y (percent c)	$(y/V)^2$	y/V	$\Delta y_d/V$
0	0	0	0	2.987
.5	.765	.897	.947	1.878
.75	.928	.948	.974	1.619
1.25	1.183	1.010	1.005	1.303
2.5	1.622	1.089	1.044	.936
5.0	2.182	1.148	1.071	.679
7.5	2.650	1.176	1.084	.539
10	3.040	1.194	1.093	.478
15	3.658	1.218	1.104	.382
20	4.127	1.234	1.111	.323
25	4.453	1.247	1.117	.281
30	4.742	1.257	1.121	.249
35	4.912	1.265	1.125	.222
40	4.995	1.272	1.128	.198
45	4.983	1.277	1.130	.178
50	4.883	1.271	1.127	.161
55	4.682	1.241	1.114	.144
60	4.304	1.208	1.099	.127
65	3.899	1.172	1.083	.111
70	3.432	1.133	1.064	.097
75	2.912	1.091	1.045	.084
80	2.352	1.047	1.023	.071
85	1.771	.999	.999	.058
90	1.188	.949	.974	.045
95	.604	.893	.945	.029
100	.021	0	0	0

L. E. radius: 0.639 percent c
T. E. radius: 0.023 percent c

NACA 65A012 BASIC THICKNESS FORM

x (percent c)	y (percent c)	$(y/V)^2$	y/V	$\Delta y_d/V$
0	0	0	0	2.520
.5	.913	.824	.908	1.757
.75	1.106	.883	.940	1.543
1.25	1.414	.989	1.084	1.283
2.5	1.942	1.081	1.040	.914
5.0	2.614	1.166	1.080	.672
7.5	3.178	1.204	1.097	.557
10	3.647	1.226	1.108	.477
15	4.392	1.263	1.124	.382
20	4.956	1.285	1.134	.324
25	5.383	1.301	1.141	.281
30	5.693	1.313	1.146	.250
35	5.897	1.324	1.151	.224
40	5.995	1.332	1.154	.198
45	5.977	1.338	1.157	.178
50	5.828	1.329	1.153	.161
55	5.544	1.292	1.137	.143
60	5.143	1.251	1.118	.126
65	4.654	1.204	1.097	.111
70	4.091	1.156	1.075	.096
75	3.487	1.104	1.051	.082
80	2.798	1.051	1.025	.069
85	2.106	.994	.997	.057
90	1.413	.936	.967	.043
95	.719	.871	.933	.027
100	.025	0	0	0

L. E. radius: 0.922 percent c
T. E. radius: 0.029 percent c

NACA 65A015 BASIC THICKNESS FORM

x (percent c)	y (percent c)	$(y/V)^2$	y/V	$\Delta y_d/V$
0	0	0	0	2.048
.5	1.131	.714	.845	1.586
.75	1.371	.781	.884	1.417
1.25	1.750	.891	.944	1.195
2.5	2.412	1.059	1.029	.880
5.0	3.255	1.187	1.089	.660
7.5	3.902	1.243	1.115	.558
10	4.553	1.280	1.131	.476
15	5.488	1.328	1.162	.382
20	6.195	1.369	1.166	.326
25	6.734	1.383	1.176	.282
30	7.122	1.401	1.184	.252
35	7.376	1.416	1.190	.227
40	7.496	1.427	1.195	.204
45	7.487	1.437	1.199	.181
50	7.369	1.419	1.191	.161
55	6.903	1.368	1.170	.142
60	6.393	1.311	1.145	.124
65	5.772	1.249	1.118	.109
70	5.063	1.186	1.089	.094
75	4.282	1.123	1.060	.080
80	3.451	1.056	1.028	.067
85	2.598	.986	.993	.055
90	1.743	.913	.956	.041
95	.887	.841	.917	.026
100	.032	0	0	0

L. E. radius: 1.416 percent c
T. E. radius: 0.038 percent c

FIGURE 2.—Concluded.

Mean line.—In order that the addition of camber not change the pressure gradients over the basic thickness form, a mean line should be used which causes uniform load to be carried from the leading edge to a point at least as far back as the position of minimum pressure on the basic thickness form. The usual practice is to camber NACA 6-series airfoil sections with the $\alpha=1.0$ type of mean line because this mean line appears to be best for high maximum lift coefficients and, contrary to theoretical predictions, does not cause excessive quarter-chord pitching-moment coefficients.


The $\alpha=1.0$ type mean line was not considered desirable, however, for the NACA 6A-series basic thickness forms because the surfaces of the cambered airfoil sections would be curved near the trailing edge. The type of mean line best suited for maintaining straight sides on these newer sections would be one that is straight from 80 percent chord to the trailing edge. Such a camber line could be obtained by modifying an $\alpha=0.7$ mean line. Consideration of the effect of mean-line loading upon the maximum lift coefficient indicated, however, that a mean line having a uniform load distribution as far back along the chord as possible was desirable. It was found that the $\alpha=0.8$ type mean line could be made straight from approximately 85 percent chord to the trailing edge without causing a sharp break in the mean line and with very little curvature between the 80-percent- and 85-percent-chord stations. The aerodynamic advantages of using this mean line in preference to one having uniform load to 70 percent chord were considered to be more important than the slight curvature existing in the modified $\alpha=0.8$ mean line. For this reason, all cambered NACA 6A-series airfoil sections have employed the $\alpha=0.8$ (modified) mean line.

The ordinates and load-distribution data corresponding to a design lift coefficient of 1.0 are presented in figure 3 for the $\alpha=0.8$ (modified) mean line. The ordinates of a mean line having any arbitrary design lift coefficient may be obtained simply by multiplying the ordinates presented by the desired design lift coefficient.

Cambered airfoils.—The method used for cambering the basic thickness distributions of figure 2 with the mean line of figure 17 is described and discussed in references 1 and 2. It consists essentially in laying out the ordinates of the basic thickness forms normal to the mean line at corresponding stations. A discussion of the method employed for combining the theoretical pressure-distribution data, presented in figures 2 and 3 for the mean-line and basic-thickness distributions, to give the approximate theoretical pressure distribution about a cambered or symmetrical airfoil section at any lift coefficient is given in reference 1.

APPARATUS AND TESTS

Wind tunnel.—All the tests described herein were conducted in the Langley two-dimensional low-turbulence pressure tunnel. The test section of this tunnel measures 3 feet by 7.5 feet. The models completely spanned the 3-foot dimension with the gaps between the model and tunnel

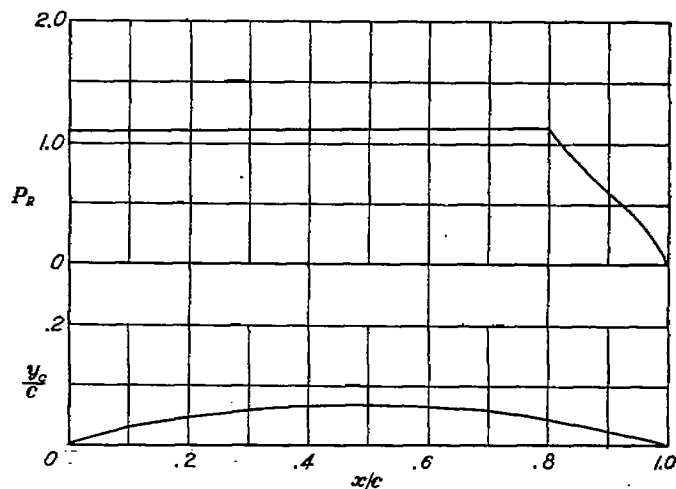

$c_{t_1} = 1.0$		$\alpha_{t_1} = 1.40^\circ$	$c_{m, H} = 0.219$	
x (percent c)	y_c (percent c)	dy_c/dx	P_R	$\frac{\Delta P}{P} = \frac{P_R}{4}$
0	0	0.47539		
.5	.281	.44004		
.75	.396	.39531		
1.25	.603	.33404	1.092	0.273
2.5	1.055	.27149		
5.0	1.803	.23378		
7.5	2.432	.20618		
10	2.981	.18540		
15	3.908	.13452	1.036	.274
20	4.651	.10873		
25	5.257	.08595		
30	5.742	.08198	1.100	.275
35	6.120	.06507		
40	6.394	-.01404	1.100	.275
45	6.571	.02559		
50	6.651	.00607		
55	6.631	-.01404	1.104	.276
60	6.508	-.03537		
65	6.274	-.05887	1.108	.277
70	5.913	-.08810	1.108	.277
75	5.401	-.12058	1.112	.278
80	4.673	-.18034	1.112	.278
85	3.607	-.23430	.840	.210
90	2.452	-.24521	.588	.147
95	1.226	-.24521	.368	.092
100	0	-.24521	0	0

FIGURE 3.—Data for NACA mean line $\alpha=0.8$ (modified).

walls sealed to prevent air leakage. Lift measurements were made by taking the difference between the pressure reaction upon the floor and ceiling of the tunnel, drag results were obtained by the wake-survey method, and pitching moments were determined with a torque balance. A more complete description of the tunnel and the method of obtaining and reducing the data are contained in reference 1.

Models.—The seven airfoil sections for which the experimental aerodynamic characteristics were obtained are:

NACA 63A010
NACA 63A210
NACA 64A010
NACA 64A210, NACA 64A212, NACA 64A215
NACA 64A410

The models representing the airfoil sections were of 24-inch chord and were constructed of laminated mahogany. The models were painted with lacquer and then sanded with No. 400 carborundum paper until aerodynamically smooth surfaces were obtained. The ordinates of the models tested are presented in tables I to VII.

THEORETICAL AND EXPERIMENTAL DATA FOR A NUMBER OF NACA 6A-SERIES AIRFOIL SECTIONS

211

TABLE I.—ORDINATES OF NACA 63A010 AIRFOIL SECTION

[Stations and ordinates given in percent of airfoil chord]

Upper surface		Lower surface	
Station	Ordinate	Station	Ordinate
0	0	0	0
.5	.816	.5	-.816
.75	.983	.75	-.983
1.25	1.250	1.25	-1.250
2.5	1.737	2.5	-1.737
5.0	2.412	5.0	-2.412
7.5	2.917	7.5	-2.917
10	3.324	10	-3.324
15	3.950	15	-3.950
20	4.400	20	-4.400
25	4.714	25	-4.714
30	4.913	30	-4.913
35	4.995	35	-4.995
40	4.968	40	-4.968
45	4.837	45	-4.837
50	4.613	50	-4.613
55	4.311	55	-4.311
60	3.943	60	-3.943
65	3.517	65	-3.517
70	3.044	70	-3.044
75	2.545	75	-2.545
80	2.040	80	-2.040
85	1.535	85	-1.535
90	1.030	90	-1.030
95	.625	95	-.625
100	.021	100	-.021

L. E. radius: 0.742
 T. E. radius: 0.023

TABLE III.—ORDINATES OF NACA 64A010 AIRFOIL SECTION

[Stations and ordinates given in percent of airfoil chord]

Upper surface		Lower surface	
Station	Ordinate	Station	Ordinate
0	0	0	0
.5	.804	.5	-.804
.75	.969	.75	-.969
1.25	1.225	1.25	-1.225
2.5	1.688	2.5	-1.688
5.0	2.327	5.0	-2.327
7.5	2.805	7.5	-2.805
10	3.199	10	-3.199
15	3.813	15	-3.813
20	4.272	20	-4.272
25	4.606	25	-4.606
30	4.837	30	-4.837
35	4.968	35	-4.968
40	4.995	40	-4.995
45	4.894	45	-4.894
50	4.684	50	-4.684
55	4.388	55	-4.388
60	4.021	60	-4.021
65	3.597	65	-3.597
70	3.127	70	-3.127
75	2.623	75	-2.623
80	2.103	80	-2.103
85	1.582	85	-1.582
90	1.062	90	-1.062
95	.541	95	-.541
100	.021	100	-.021

L. E. radius: 0.687
 T. E. radius: 0.023

TABLE II.—ORDINATES OF NACA 63A210 AIRFOIL SECTION

[Stations and ordinates given in percent of airfoil chord]

Upper surface		Lower surface	
Station	Ordinate	Station	Ordinate
0	0	0	0
.423	.888	.577	-.758
.664	1.058	.836	-.900
1.151	1.367	1.349	-1.125
2.384	1.944	2.616	-1.522
4.869	2.769	5.131	-2.047
7.304	3.400	7.638	-2.428
9.883	3.917	10.137	-2.725
14.889	4.729	15.131	-3.187
19.882	5.325	20.118	-3.498
24.894	5.764	25.102	-3.662
29.916	6.090	30.084	-3.784
34.935	6.219	35.065	-3.771
39.956	6.247	40.045	-3.689
44.975	6.161	45.026	-3.528
49.994	5.943	50.000	-3.283
55.012	5.637	54.988	-2.985
60.028	5.245	59.972	-2.641
65.041	4.772	64.959	-2.262
70.052	4.227	69.945	-1.861
75.061	3.624	74.939	-1.484
80.074	2.974	79.928	-1.104
85.072	2.254	84.928	-.812
90.050	1.519	89.950	-.539
95.026	.769	94.974	-.279
100.000	.021	100.000	-.021

L. E. radius: 0.742
 T. E. radius: 0.023
 Slope of radius through L. E.: 0.095

TABLE IV.—ORDINATES OF NACA 64A210 AIRFOIL SECTION

[Stations and ordinates given in percent of airfoil chord]

Upper surface		Lower surface	
Station	Ordinate	Station	Ordinate
0	0	0	0
.424	.856	.576	-.744
.665	1.044	.855	-.886
1.153	1.342	1.347	-1.100
2.387	1.895	2.613	-1.473
4.874	2.685	5.126	-1.963
7.359	3.288	7.681	-2.516
9.865	3.792	10.132	-2.800
14.874	4.692	15.126	-3.030
19.885	5.200	20.116	-3.340
24.900	5.656	25.100	-3.554
29.917	5.984	30.083	-3.688
34.935	6.192	35.065	-3.744
39.955	6.274	40.045	-3.716
44.975	6.208	45.025	-3.580
49.994	6.014	50.000	-3.354
55.012	5.714	54.988	-3.082
60.028	5.323	59.972	-2.719
65.042	4.852	64.953	-2.342
70.054	4.310	69.946	-1.944
75.063	3.702	74.937	-1.542
80.073	3.037	79.924	-1.167
85.074	2.301	84.926	-.859
90.052	1.551	89.943	-.571
95.027	.785	94.974	-.295
100.000	.021	100.000	-.021

L. E. radius: 0.687
 T. E. radius: 0.023
 Slope of radius through L. E.: 0.095

TABLE V.—ORDINATES OF NACA 64A410 AIRFOIL SECTION

[Stations and ordinates given in percent of airfoil chord]

Upper surface		Lower surface	
Station	Ordinate	Station	Ordinate
0	0	0	0
.380	.902	.680	-.678
.582	1.112	.918	-.798
1.099	1.461	1.441	-.908
2.276	2.095	2.724	-1.251
4.749	3.034	5.261	-1.592
7.280	3.865	7.770	-1.919
9.787	4.580	10.293	-2.244
14.748	5.366	15.262	-2.406
19.770	6.126	20.230	-2.489
24.800	6.705	25.200	-2.537
29.834	7.131	30.166	-2.518
34.871	7.414	35.129	-2.438
39.910	7.552	40.090	-2.293
44.950	7.522	45.050	-2.024
49.989	7.344	50.011	-1.738
55.025	7.040	54.975	-1.418
60.057	6.624	59.943	-1.089
65.085	6.106	64.915	-.780
70.108	5.480	69.882	-.490
75.126	4.780	74.874	-.229
80.151	3.937	79.842	-.132
85.148	3.018	84.862	-.070
90.104	2.038	89.890	-.045
95.083	1.028	94.947	-.021
100.000	.021	100.000	-.021

L. E. radius: 0.687
T. E. radius: 0.023
Slope of radius through L. E.: 0.190

TABLE VII.—ORDINATES OF NACA 64A215 AIRFOIL SECTION

[Stations and ordinates given in percent of airfoil chord]

Upper surface		Lower surface	
Station	Ordinate	Station	Ordinate
0	0	0	0
.388	1.243	.612	-1.131
.524	1.809	.878	-1.351
1.107	1.930	1.393	-1.688
2.333	2.713	2.667	-2.291
4.811	3.833	5.189	-3.111
7.804	4.683	7.696	-3.711
9.802	5.391	10.188	-4.199
12.811	6.810	15.189	-4.948
15.827	7.351	20.173	-5.421
20.849	7.976	25.151	-5.873
25.876	8.417	30.125	-6.121
30.903	8.686	35.097	-6.238
35.933	8.766	40.067	-6.208
40.963	8.627	45.037	-5.929
45.992	8.308	50.008	-5.498
50.918	7.843	54.982	-5.191
60.042	7.258	59.958	-4.654
65.068	6.666	64.937	-4.056
70.079	5.782	69.921	-3.410
75.093	4.926	74.907	-2.708
80.111	4.017	79.889	-2.147
85.109	3.039	84.891	-1.567
90.078	2.046	89.924	-1.008
95.039	1.039	94.961	-.649
100.000	.032	100.000	-.032

L. E. radius: 1.561
T. E. radius: 0.037
Slope of radius through L. E.: 0.095

TABLE VI.—ORDINATES OF NACA 641A212 AIRFOIL SECTION

[Stations and ordinates given in percent of airfoil chord]

Upper surface		Lower surface	
Station	Ordinate	Station	Ordinate
0	0	0	0
.409	1.013	.591	-.901
.648	1.233	.852	-1.075
1.135	1.580	1.365	-1.338
2.365	2.225	2.635	-1.808
4.849	3.145	5.151	-2.423
7.343	3.846	7.657	-2.874
9.842	4.432	10.158	-3.240
14.849	5.358	15.151	-3.796
19.862	6.060	20.138	-4.200
24.880	6.584	25.120	-4.482
29.900	6.956	30.100	-4.680
34.922	7.189	35.078	-4.741
39.946	7.272	40.054	-4.714
44.970	7.177	45.030	-4.549
49.993	6.985	50.007	-4.275
55.015	6.570	54.985	-3.918
60.034	6.108	59.966	-3.499
65.050	5.544	64.950	-3.084
70.064	4.903	69.936	-2.537
75.075	4.197	74.925	-2.037
80.090	3.433	79.910	-1.563
85.098	2.601	84.912	-1.159
90.062	1.751	89.938	-.781
95.032	.888	94.968	-.398
100.000	.025	100.000	-.025

L. E. radius: 0.904
T. E. radius: 0.023
Slope of radius through L. E.: 0.095

Tests.—The tests of each smooth airfoil section consisted in measurements of the lift, drag, and quarter-chord pitching-moment coefficients at Reynolds numbers of 3×10^6 , 6×10^6 , and 9×10^6 . In addition, the lift and drag characteristics of each section were determined at a Reynolds number of 6×10^6 with standard roughness applied to the leading edge of the model. The standard roughness employed on these 24-inch-chord models consisted of 0.011-inch-diameter carborundum grains spread over a surface length of 8 percent of the chord back from the leading edge on the upper and lower surfaces. The grains were thinly spread to cover from 5 to 10 percent of this area. In an effort to obtain some idea of the effectiveness of the airfoil sections when equipped with trailing-edge high-lift devices, each section was fitted with a simulated split flap deflected 60° . Lift measurements with the split flap were made at a Reynolds number of 6×10^6 with the airfoil leading edge both smooth and rough.

RESULTS

The results obtained from tests of the seven airfoil sections are presented in figures 4 to 10 in the form of standard aerodynamic coefficients representing the lift, drag, and quarter-chord pitching-moment characteristics of the airfoil sections.

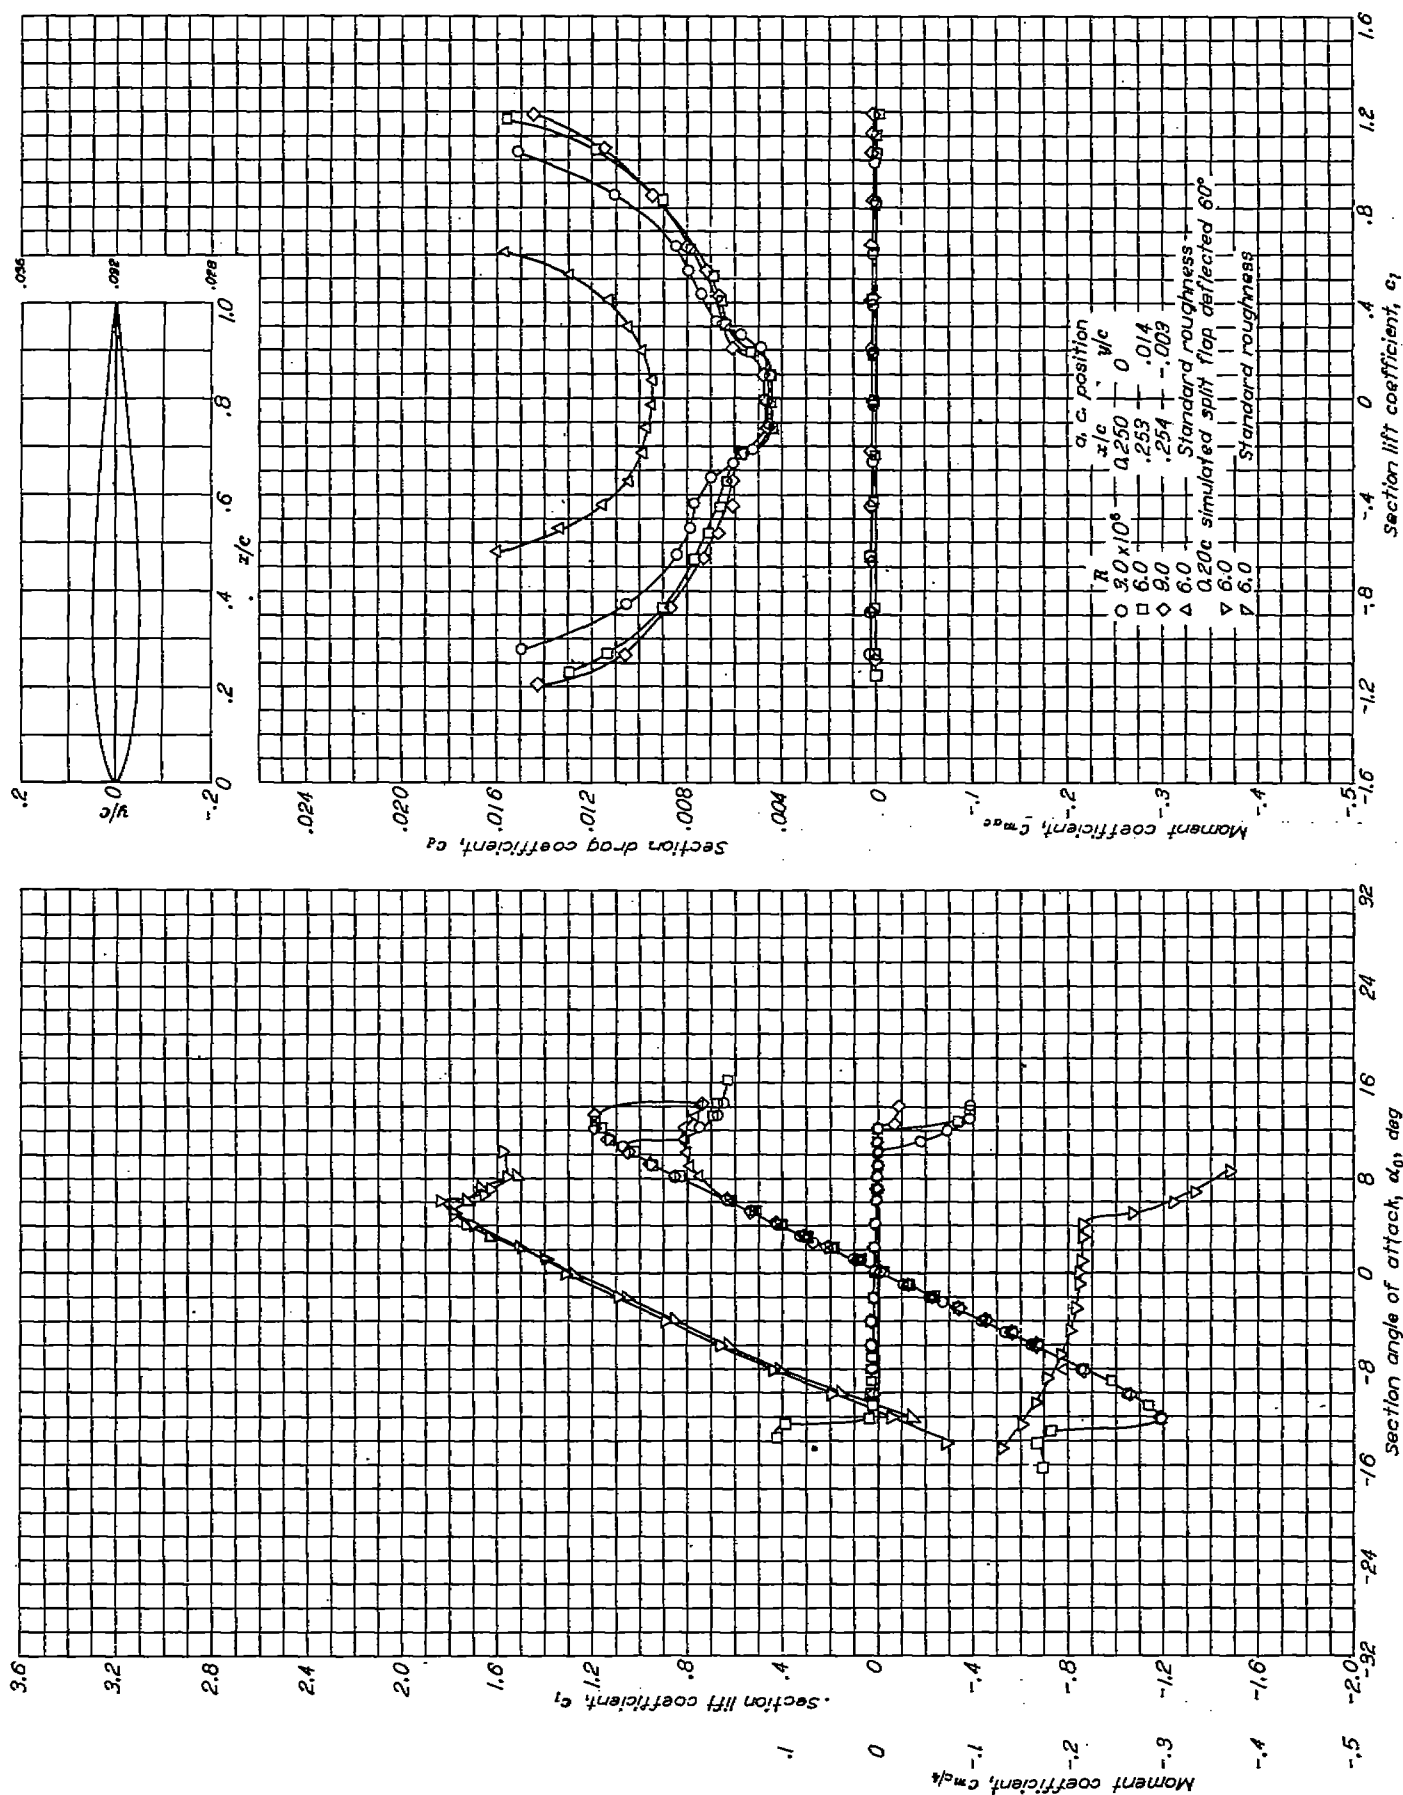


FIGURE 4.—Aerodynamic characteristics of the NACA 65A010 airfoil section, 24-inch chord.

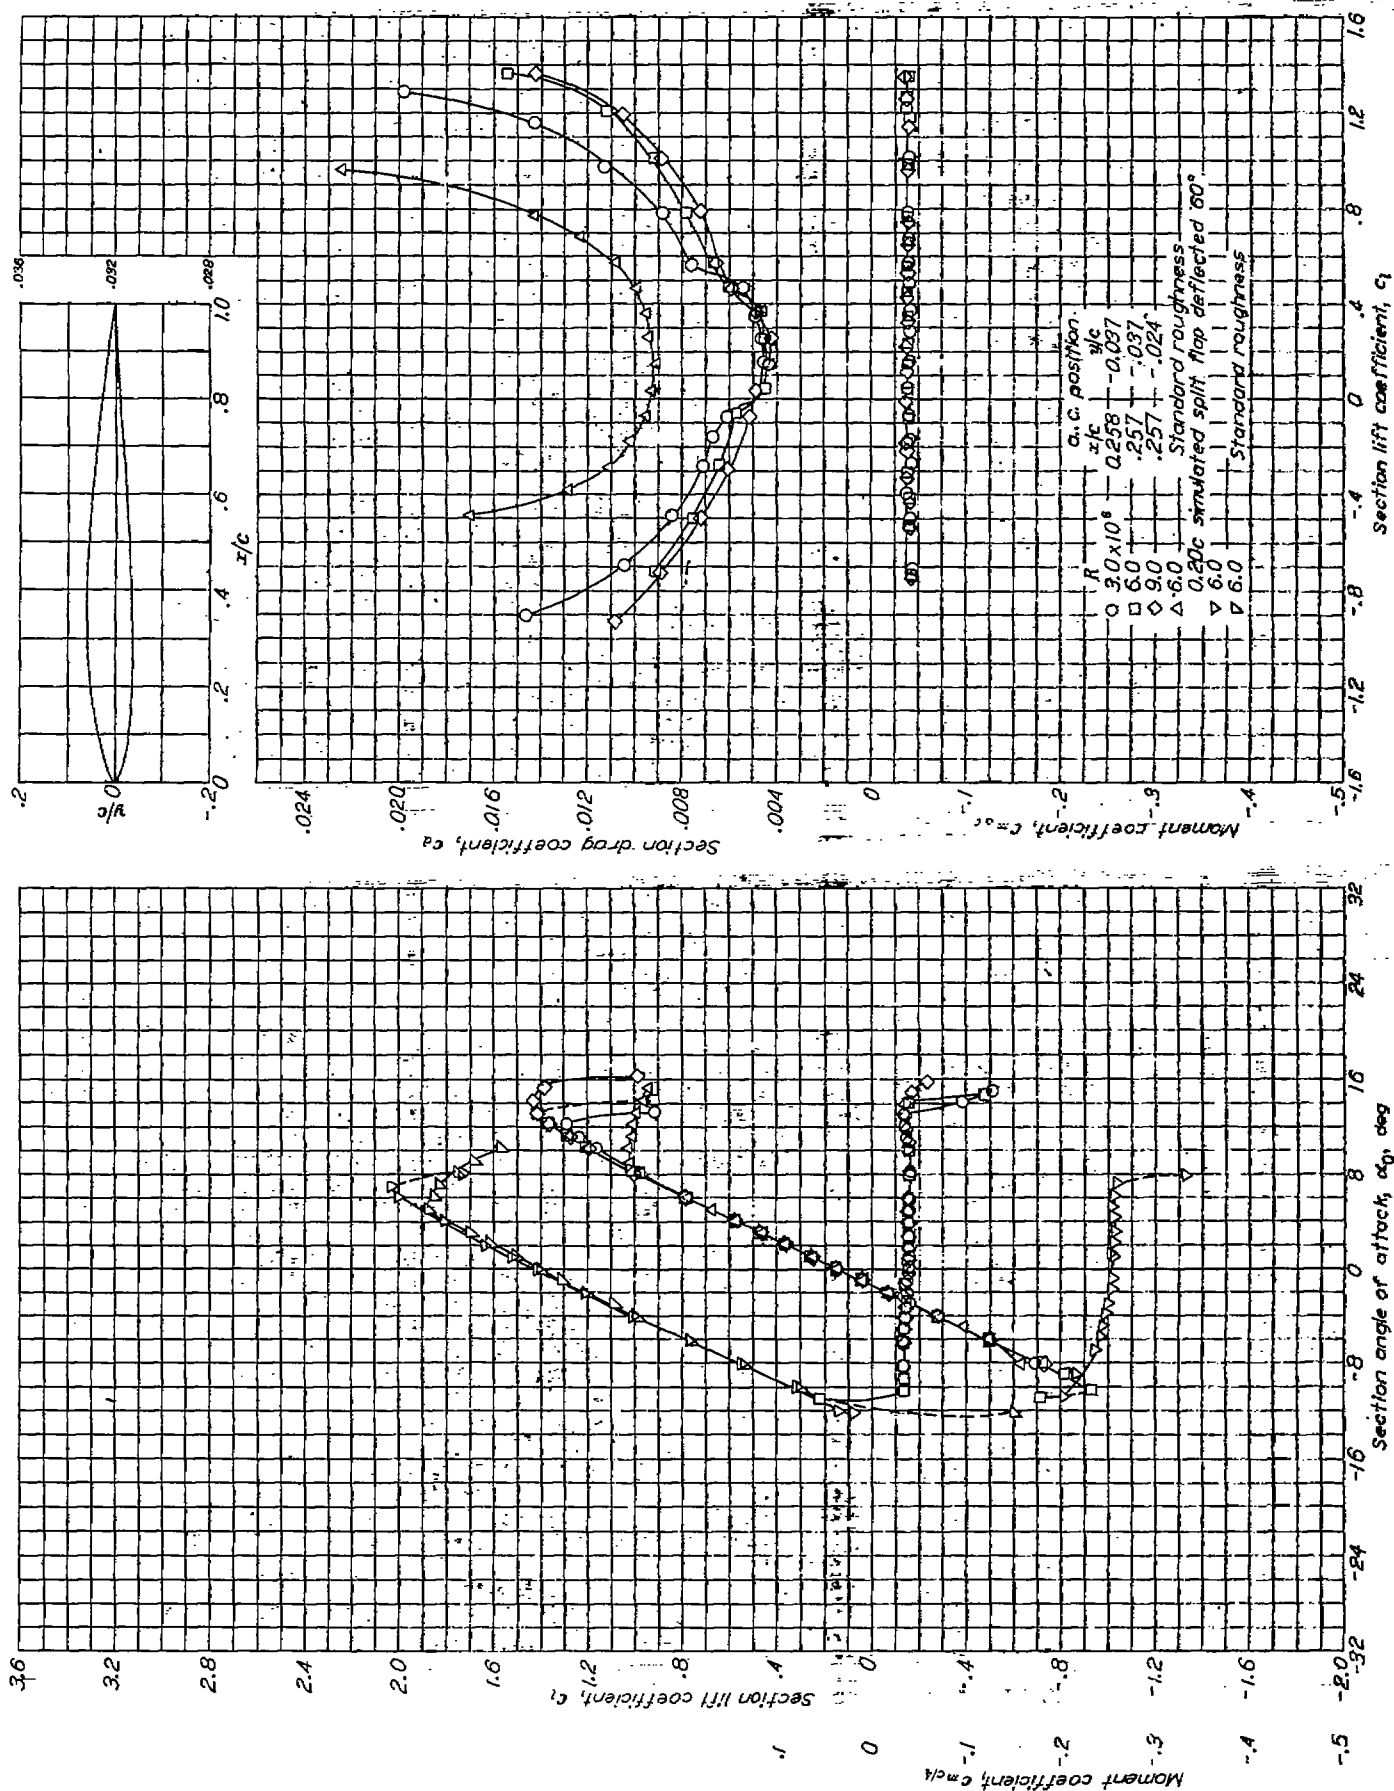


FIGURE 5.—Aerodynamic characteristics of the NACA 63A210 airfoil section, 24-inch chord.

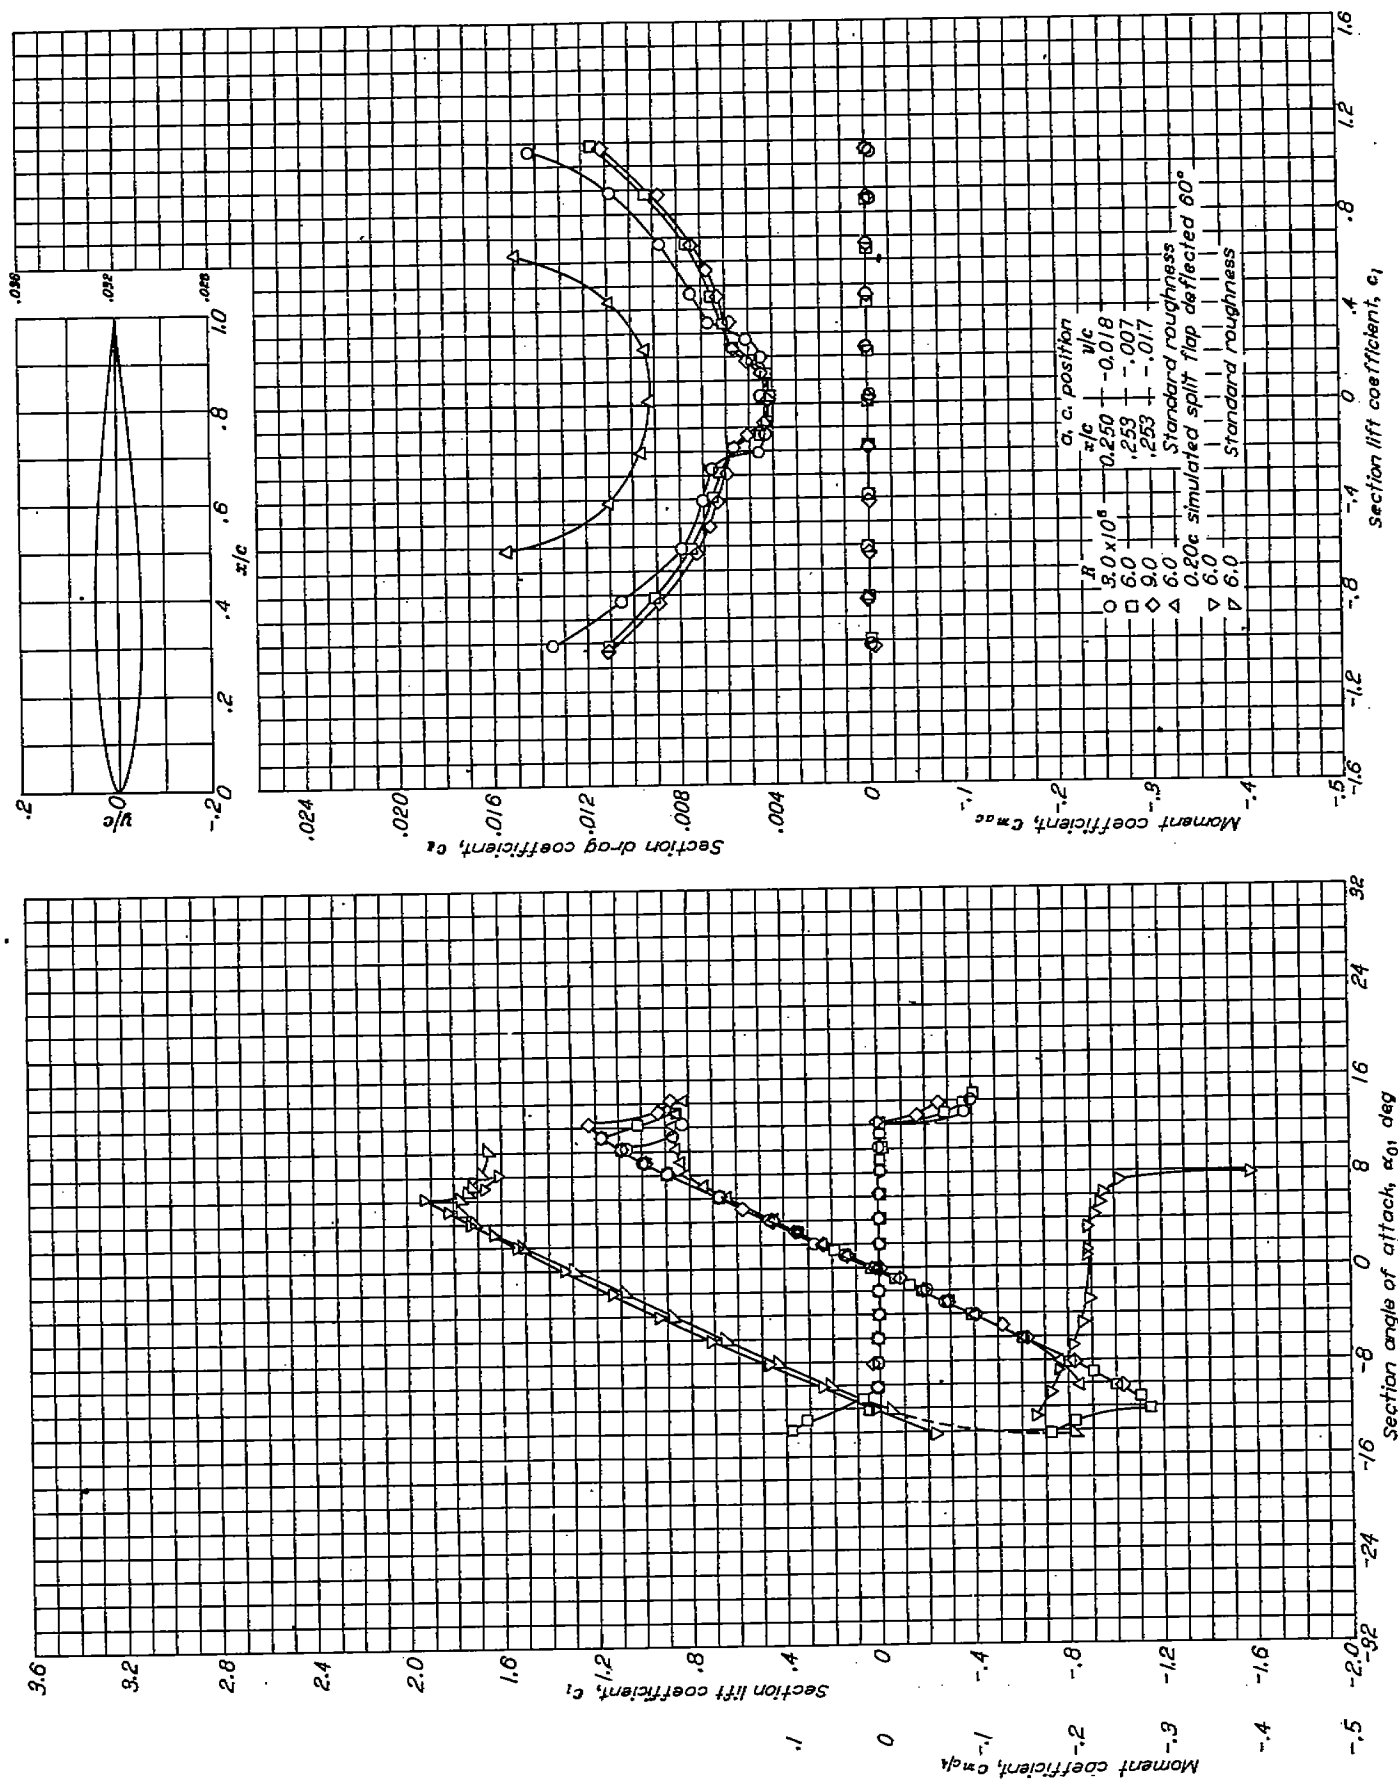


FIGURE 6.—Aerodynamic characteristics of the NACA 64A010 airfoil section, 24-inch chord.

FIGURE 7.—Aerodynamic characteristics of the NACA 64A210 airfoil section, 24-inch chord.

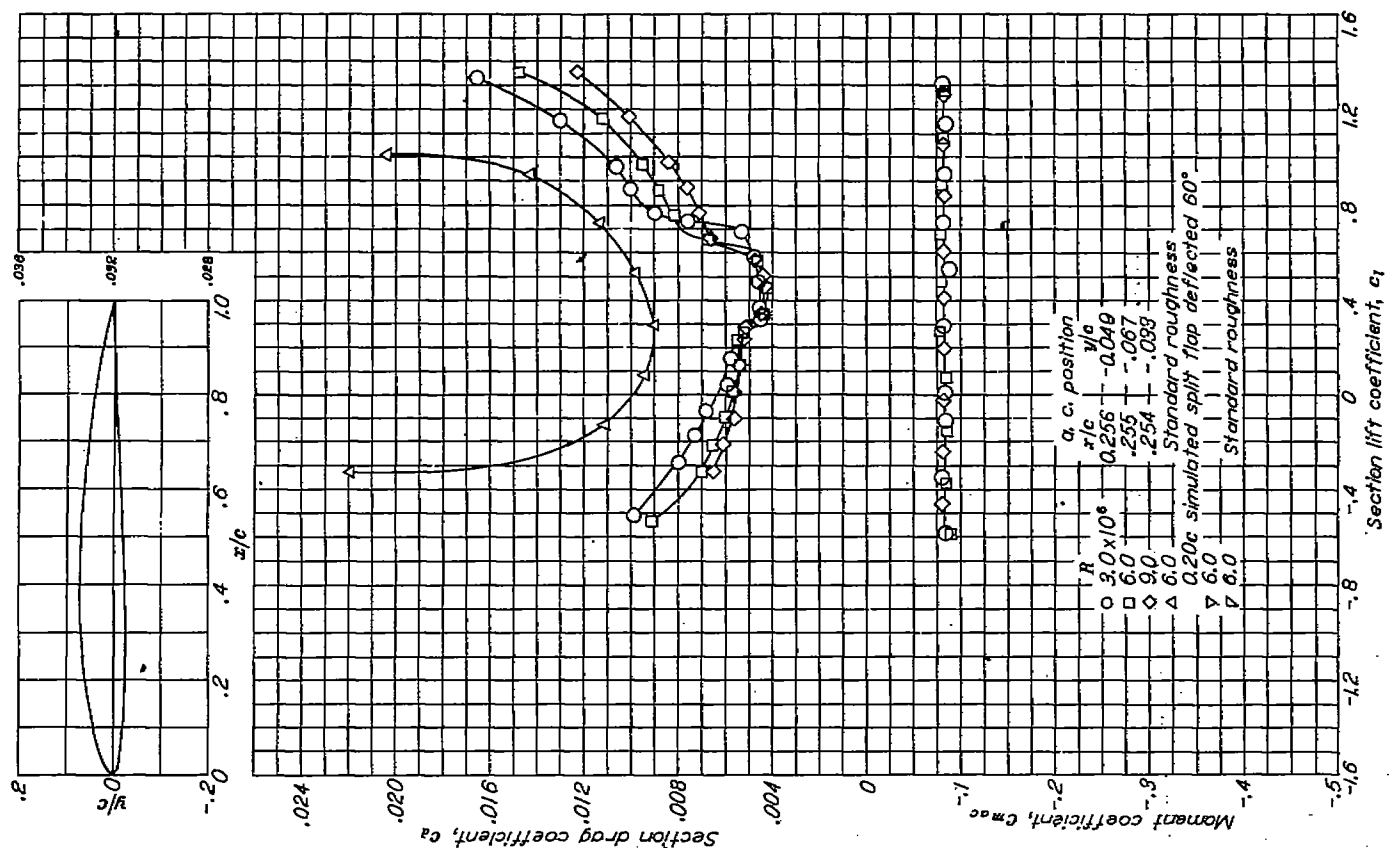


FIGURE 8.—Aerodynamic characteristics of the NACA 64A410 airfoil section, 24-inch chord.

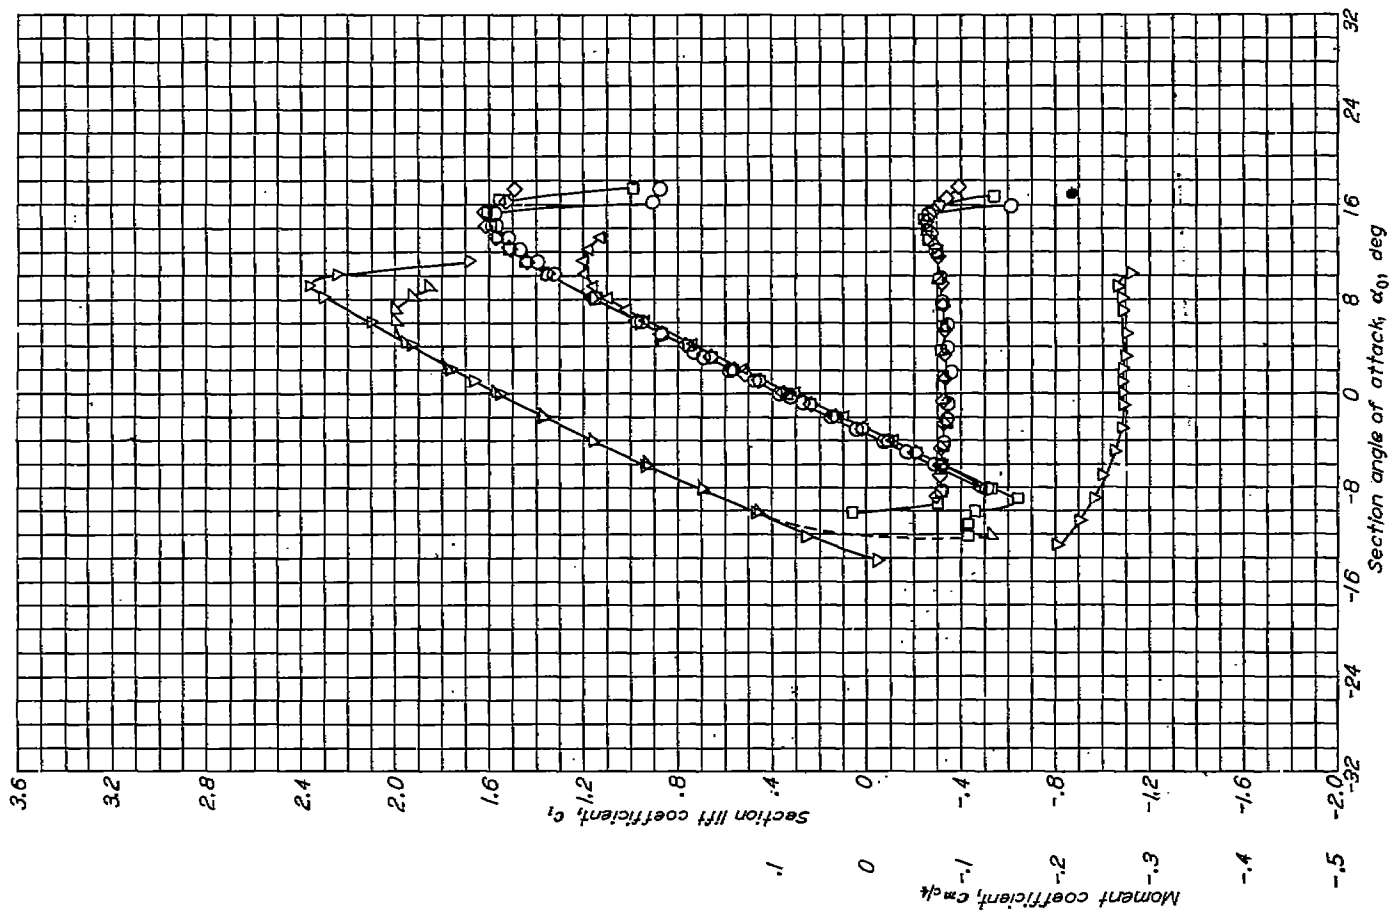


FIGURE 9.—Aerodynamic characteristics of the NACA 64, A212 airfoil section, 24-inch chord.

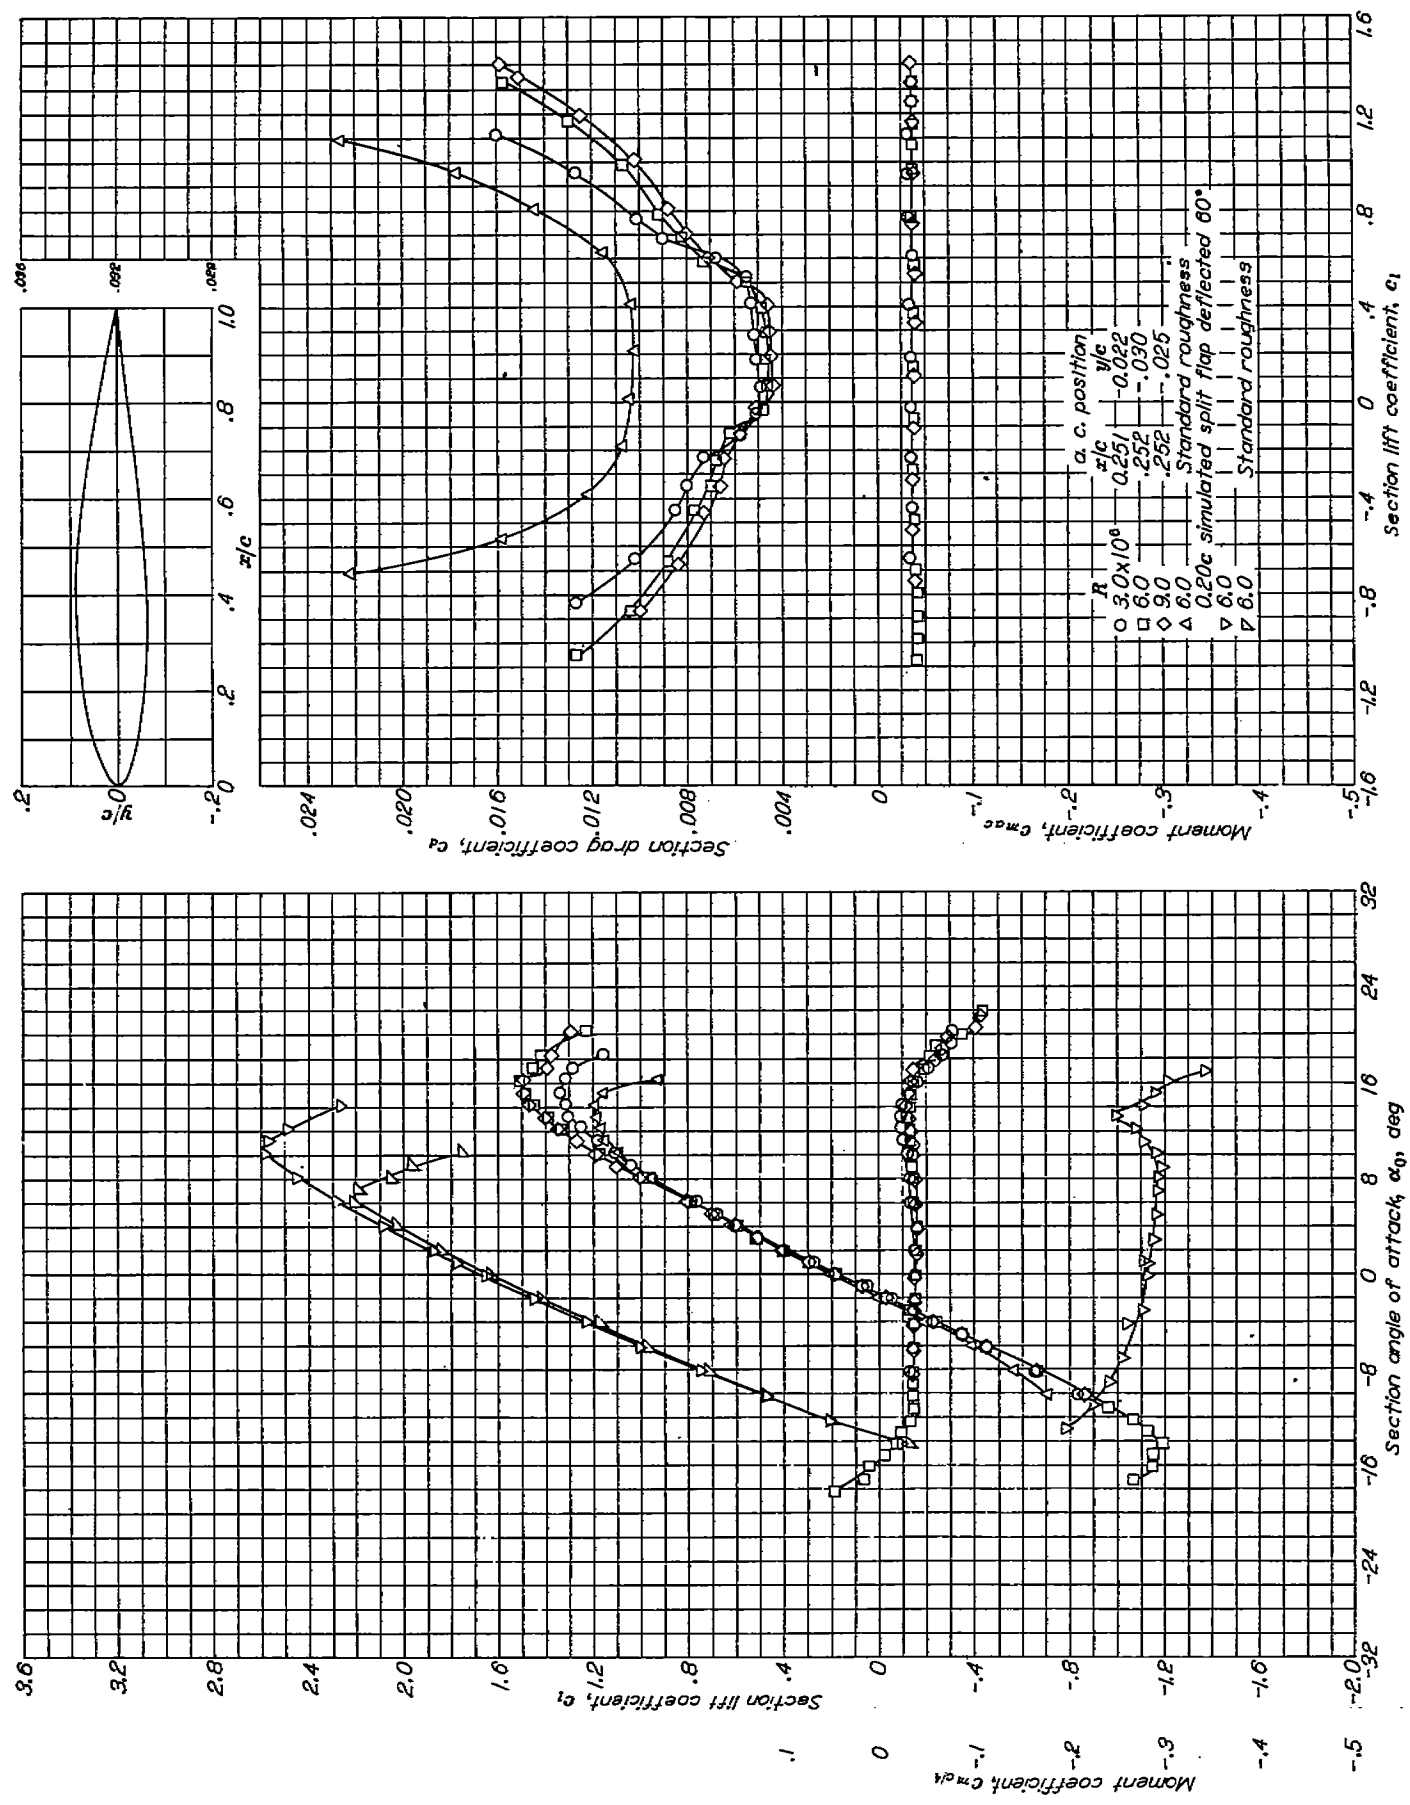


FIGURE 10.—Aerodynamic characteristics of the NACA 64A215 airfoil section, 24-inch chord.

The calculated position of the aerodynamic center and the variation of the pitching-moment coefficient with lift coefficient about this point are also included in these data. The influence of the tunnel boundaries has been removed from all the aerodynamic data by means of the following equations (developed in reference 1):

$$c_d = 0.990c_d'$$

$$c_l = 0.973c_l'$$

$$c_{m_{c/4}} = 0.951c_{m_{c/4}}'$$

$$\alpha_0 = 1.015\alpha_0'$$

where the primed quantities denote the measured coefficients.

DISCUSSION

Although the amount of systematic aerodynamic data presented for NACA 6A-series airfoil sections is not large, it is enough to indicate the relative merits of the NACA 6A-series airfoil sections as compared with the NACA 6-series sections. The variation of the important aerodynamic characteristics of the five NACA 64A-series airfoils with the pertinent geometrical parameters of the airfoils is shown in figures 11 to 17, together with comparable data for NACA 64-series airfoils. The curves shown in figures 11 to 17 are for the NACA 64-series airfoil sections and are taken from the faired data of reference 1. The experimental points which appear on these figures represent the results obtained for the NACA 64A-series airfoil sections in the present investigation. Since only two NACA 63A-series sections were tested, comparative results are not presented for them. The effect of removing the cusp from the NACA 63-series

sections is about the same as that of removing the cusp from the NACA 64-series sections.

The comparative data showing the effects upon the aerodynamic characteristics of removing the trailing-edge cusp from NACA 6-series airfoil sections should be used with caution if the cusp removal is affected in some manner other than that indicated earlier in this paper. For example, if the cusp should be removed from a cambered airfoil by means of a straight-line fairing of the airfoil surfaces, the amount of camber would be decreased near the trailing edge. Naturally the effect upon the aerodynamic characteristics of removing the cusp in such a manner would not be the same as indicated by the comparative results presented for NACA 6-series and 6A-series airfoils.

Drag.—The variation of section minimum drag coefficient with airfoil thickness ratio at a Reynolds number of 6×10^6 is shown in figure 11 for NACA 64-series and NACA 64A-series airfoil sections of various cambers, both smooth and with standard leading-edge roughness. As with the NACA 64-series sections (reference 1), the minimum drag coefficients of the NACA 64A-series sections show no consistent variation with camber. Comparison of the data of figure 11 indicates that removing the cusp from the trailing edge has no appreciable effect upon the minimum drag coefficients of the airfoils, either smooth or with standard leading-edge roughness.

Increasing the Reynolds number from 3×10^6 to 9×10^6 has about the same effect upon the minimum drag coefficient of NACA 64A-series airfoils (figs. 4 to 10) as that indicated in reference 1 for the NACA 64-series airfoils.

Some differences exist in the drag coefficients of NACA 64- and 64A-series airfoils outside the low-drag range of lift coefficients but these differences are small and do not show any consistent trends (figs. 4 to 10 and reference 1).

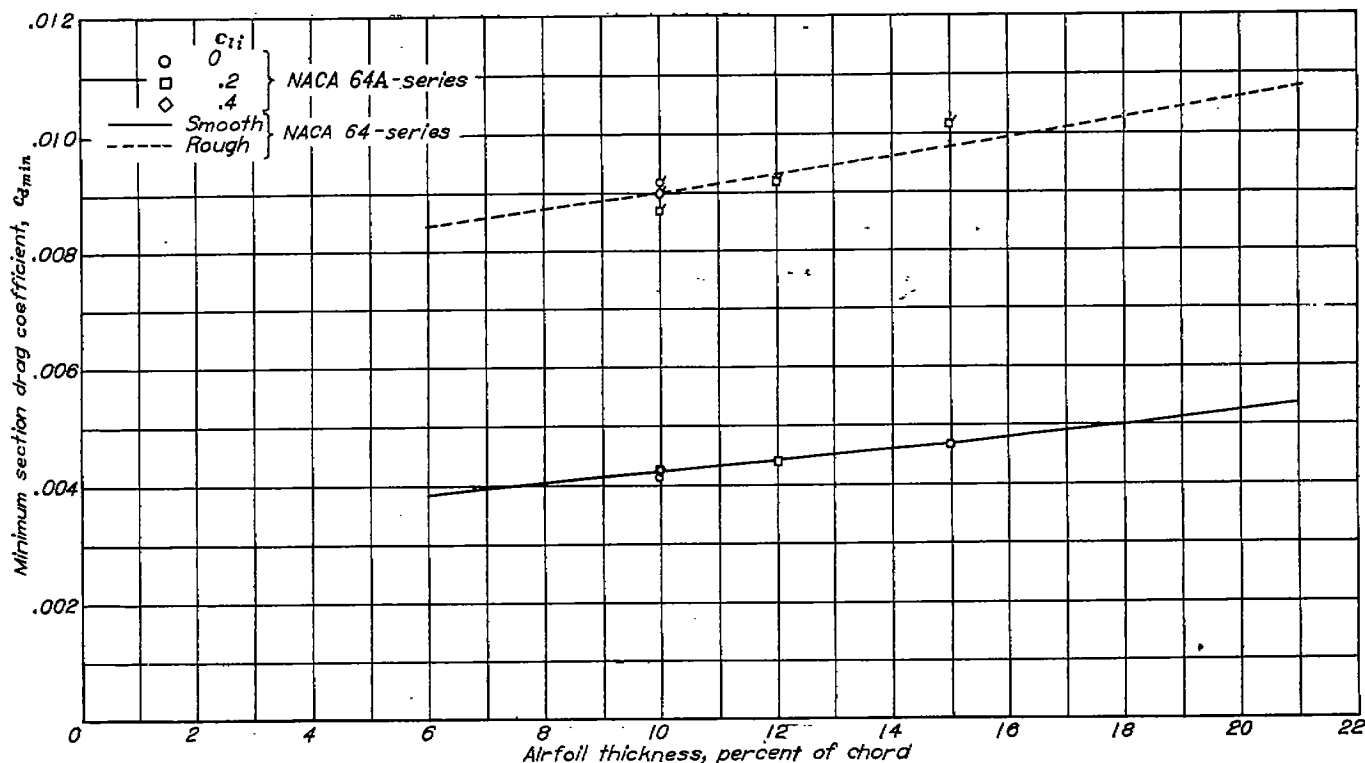


FIGURE 11.—Variation of minimum section drag coefficient with airfoil thickness for some NACA 64-series (reference 1) and NACA 64A-series airfoil sections of various cambers in the smooth condition and with standard leading-edge roughness. $R = 6 \times 10^6$; flagged symbols indicate NACA 64A-series sections with standard roughness.

Lift.—The section angle of zero lift as a function of thickness ratio is shown in figure 12 for NACA 64- and 64A-series airfoil sections of various cambers. These results show that the angle of zero lift is nearly independent of thickness and is primarily dependent upon the amount of camber for a particular type of mean line. Theoretical calculations made by use of the mean-line data of figure 3 and reference 1 indicate that airfoils with the $\alpha=0.8$ (modified) mean line should have angles of zero lift less negative than those with the $\alpha=1.0$ mean line. Actually, the reverse appears to be the case, and this effect is due mainly to the fact that airfoils having the $\alpha=1.0$ type of mean line have angles of zero lift which are only about 74 percent of their theoretical value (reference 1), and those having the $\alpha=0.8$ (modified) mean lines have angles of zero lift larger than indicated by theory.

The measured lift-curve slopes corresponding to the NACA 64-series and NACA 64A-series airfoils of various cambers are presented in figure 13 as a function of airfoil thickness ratio. No consistent variation of lift-curve slope with camber or Reynolds number is shown by either type of airfoil. The increase in trailing-edge angle which accompanies removal of the cusp would be expected to reduce the lift-curve slope by an amount which increases with airfoil thickness ratio (references 3 and 4). Because the present data for the NACA 6A-series sections show essentially no variation in lift-curve slope with thickness ratio, it appears that the effect of increasing the trailing-edge angle is about

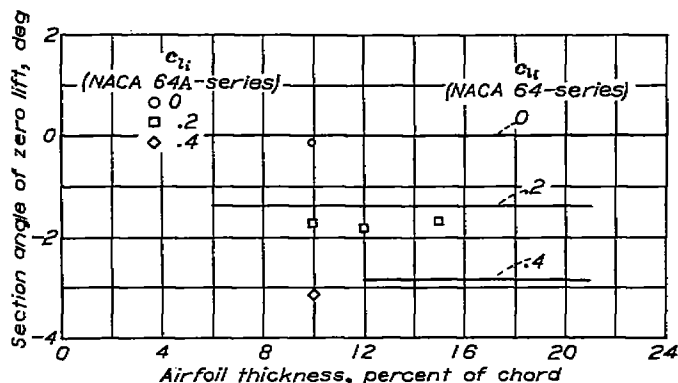


FIGURE 12.—Variation of section angle of zero lift with airfoil thickness ratio and camber for some NACA 64-series (reference 1) and NACA 64A-series airfoil sections. $R=6 \times 10^6$.


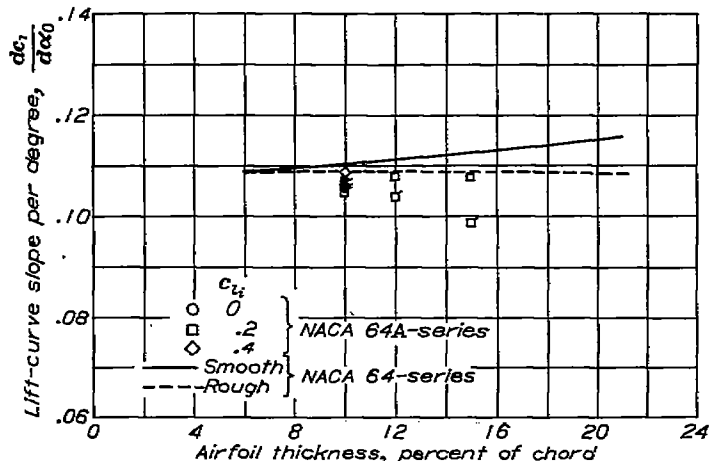


FIGURE 13.—Variation of lift-curve slope with airfoil thickness ratio for some NACA 64-series (reference 1) and NACA 64A-series airfoil sections of various cambers both in the smooth condition and with standard leading-edge roughness. $R=6 \times 10^6$; flagged symbols indicate NACA 64A-series sections with standard roughness.

balanced by the increase in lift-curve slope with thickness ratio shown by NACA 6-series sections. The value of the lift-curve slope for smooth NACA 64A-series airfoil sections is very close to that predicted from thin airfoil theory (2π per radian or 0.110 per degree). Removing the trailing-edge cusp from an airfoil section with standard leading-edge roughness causes the lift-curve slope to decrease quite rapidly with increasing airfoil thickness ratio.

The variation of the maximum section lift coefficient with airfoil thickness ratio and camber at a Reynolds number of 6×10^6 is shown in figure 14 for NACA 64-series and NACA 64A-series airfoil sections with and without standard leading-edge roughness and simulated split flaps deflected 60° . A comparison of these data indicates that the character of the variation of maximum lift coefficient with airfoil thickness ratio and camber is nearly the same for the NACA 64-series and NACA 64A-series airfoil sections. The magnitude of the maximum lift coefficient appears to be slightly less for the plain NACA 64A-series airfoils and slightly higher for the NACA 64A-series airfoils with split flaps than corresponding values for the NACA 64-series airfoils. These differences are small, however, and for engineering applications the maximum-lift characteristics of NACA 64-series and 64A-series airfoil sections of comparable thickness and design lift coefficient may be considered practically the same.

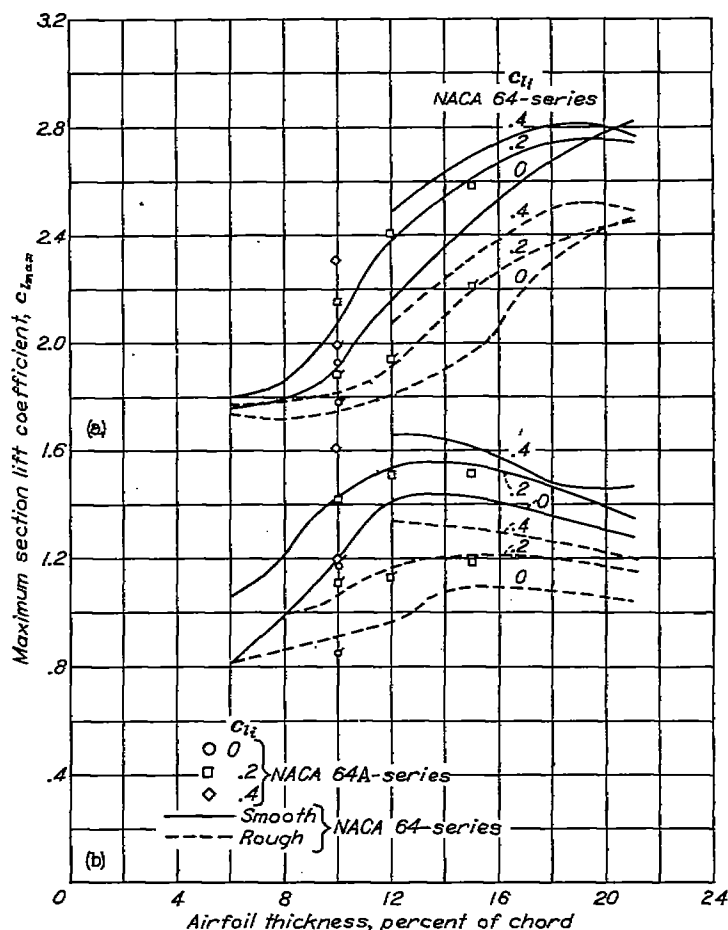

(a) Airfoil with simulated split flap deflected 60° .
(b) Plain airfoil.

FIGURE 14.—Variation of maximum section lift coefficient with airfoil thickness ratio and camber for some NACA 64-series (reference 1) and NACA 64A-series airfoil sections with and without simulated split flaps and standard roughness. $R=6 \times 10^6$; flagged symbols indicate NACA 64A-series airfoils with standard roughness.


A comparison of the maximum-lift data for NACA 64A-series airfoil sections, presented in figures 4 to 10, with similar data for NACA 64-series airfoil sections indicates that the scale-effect characteristics of the two types of section are essentially the same for the range of Reynolds number from 3×10^6 to 9×10^6 .

Pitching moment.—Thin-airfoil theory provides a means for calculating the theoretical quarter-chord pitching-moment coefficients of airfoil sections having various amounts and

types of camber. Calculations were made according to these methods for airfoils having the $\alpha=1.0$ and $\alpha=0.8$ (modified) mean lines by using the theoretical mean-line data presented in figure 3 and in reference 1. The results of these calculations indicate that the quarter-chord pitching-moment coefficients of the NACA 64A-series airfoil sections having the $\alpha=0.8$ (modified) mean line should be only about 87 percent of those for the NACA 64-series airfoil sections with the $\alpha=1.0$ mean line. The experimental relationship between the quarter-chord pitching-moment coefficient and airfoil thickness ratio and camber, shown in figure 15, discloses that the plain NACA 64A-series airfoils have pitching-moment coefficients which are slightly more negative than those for the plain NACA 64-series airfoils. The increase in the magnitude of the pitching-moment coefficient of NACA 64A-series airfoils as compared with NACA 64-series airfoils becomes greater when the airfoils are equipped with simulated split flaps deflected 60° . A comparison of the theoretical and measured pitching-moment coefficients is shown in figure 16 for NACA 64-series and 64A-series airfoil sections. These comparative data indicate that the NACA 64A-series sections much more nearly realize their theoretical moment coefficients than do the 64-series airfoil sections. Similar trends have been shown to result when mean lines such as the $\alpha=0.5$ type are employed with NACA 6-series airfoils (reference 1).

Aerodynamic center.—The position of the aerodynamic center and the variation of the moment coefficient with lift coefficient about this point were calculated from the quarter-chord pitching-moment data for each of the seven airfoils tested. The variation of the chordwise position of the aerodynamic center with airfoil thickness ratio is shown in figure 17 for the NACA 64-series and 64A-series airfoil sections. Since the data for the NACA 64-series airfoils showed no consistent variation with camber, the results are represented by a single faired curve for all cambers. Following this same trend, the position of the aerodynamic center for the NACA 64A-series airfoils shows no consistent variation with camber. The data of figures 4 to 10 show that the variations in the Reynolds number have no consistent effect upon the chordwise position of the aerodynamic center.

Perfect fluid theory indicates that the position of the aerodynamic center should move rearward with increasing airfoil thickness and the experimental results for the NACA 64-series airfoil sections follow this trend. The data of

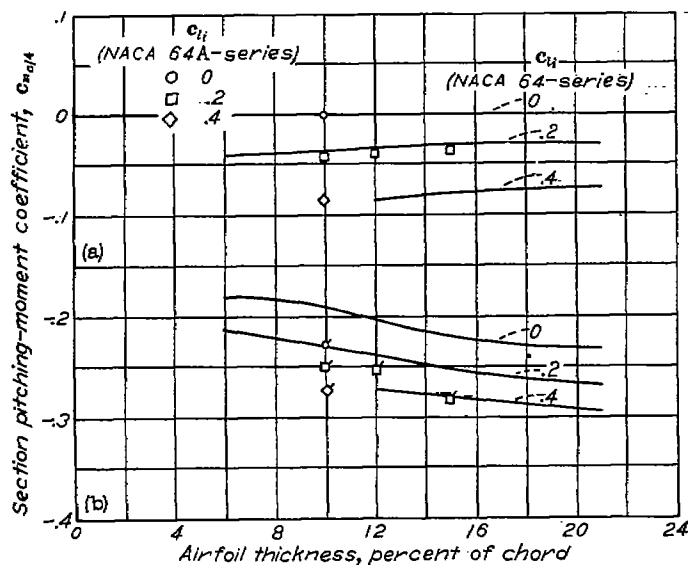

(a) Plain airfoil.
(b) Airfoil with simulated split flap deflected 60° .

FIGURE 15.—Variation of section quarter-chord pitching-moment coefficient at zero angle of attack with airfoil thickness ratio and camber for some NACA 64-series (reference 1) and NACA 64A-series airfoil sections with and without split flaps. $R=6 \times 10^6$; flagged symbols indicate NACA 64A-series airfoils with 60° simulated split flap.

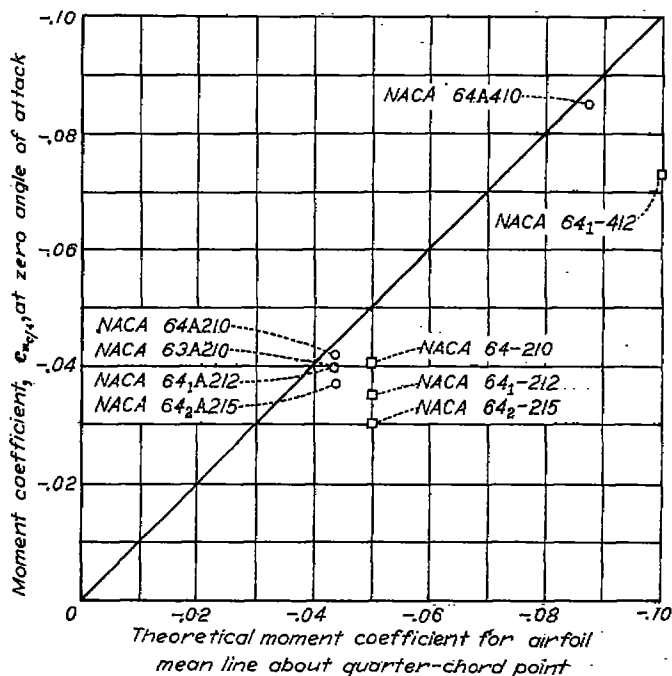


FIGURE 16.—Comparison of theoretical and measured pitching-moment coefficients for some NACA 64-series and 64A-series airfoil sections. $R=6 \times 10^6$

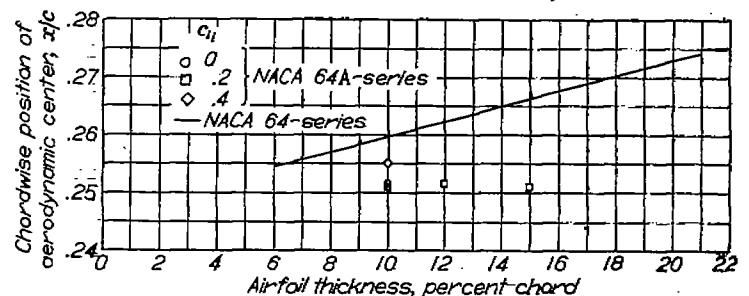


FIGURE 17.—Variation of chordwise position of aerodynamic center with airfoil thickness ratio for some NACA 64-series (reference 1) and 64A-series airfoil sections of different cambers. $R=6 \times 10^6$.

reference 5 show important forward movements of the aerodynamic center with increasing trailing-edge angle for a given airfoil thickness ratio. The results obtained for the NACA 24-, 44-, and 230-series airfoil sections (reference 1) reveal that the effect of increasing trailing-edge angle predominates over the effect of increasing thickness because the position of the aerodynamic center moves forward with increasing thickness ratio for these airfoil sections. For the NACA 64A-series airfoils (fig. 17) the aerodynamic center is slightly behind the quarter-chord point and does not appear to vary with increasing thickness. These results suggest that the effect of increasing thickness is counterbalanced by increasing trailing-edge angle for these airfoil sections.

CONCLUSIONS

From a two dimensional wind-tunnel investigation of the aerodynamic characteristics of five NACA 64A-series and two NACA 63A-series airfoil sections the following conclusions based upon data obtained at Reynolds numbers of 3×10^6 , 6×10^6 , and 9×10^6 may be drawn:

1. The section minimum drag and maximum lift coefficients of corresponding NACA 6-series and 6A-series airfoil sections are essentially the same.
2. The lift-curve slopes of smooth NACA 6A-series airfoil sections appear to be essentially independent of airfoil thickness ratio, in contrast to the trends shown by NACA 6-series airfoil sections. The addition of standard leading-edge roughness causes the lift-curve slope to decrease with increasing airfoil thickness ratio for NACA 6A-series airfoil sections.

3. The section angles of zero lift of NACA 6A-series airfoil sections are slightly more negative than those of comparable NACA 6-series airfoil sections.

4. The section quarter-chord pitching-moment coefficients of NACA 6A-series airfoil sections are slightly more negative than those of comparable NACA 6-series airfoil sections. The position of the aerodynamic center is essentially independent of airfoil thickness ratio for NACA 6A-series airfoil sections.

LANGLEY MEMORIAL AERONAUTICAL LABORATORY,
 NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS,
 LANGLEY FIELD, VA., May 6, 1947.

REFERENCES

1. Abbott, Ira H., Von Doenhoff, Albert E., and Stivers, Louis S., Jr.: Summary of Airfoil Data. NACA Rep. No. 824, 1945.
2. Jacobs, Eastman N., Ward, Kenneth E., and Pinkerton, Robert M.: The Characteristics of 78 Related Airfoil Sections from Tests in the Variable-Density Wind Tunnel. NACA Rep. No. 460, 1933.
3. Purser, Paul E., and McKee, John W.: Wind-Tunnel Investigation of a Plain Aileron with Thickened and Beveled Trailing Edges on a Tapered Low-Drag Wing. NACA ACR, Jan. 1943.
4. Jones, Robert T., and Ames, Milton B., Jr.: Wind-Tunnel Investigation of Control-Surface Characteristics. V—The Use of a Beveled Trailing Edge to Reduce the Hinge Moment of a Control Surface. NACA ARR, March 1942.
5. Purser, Paul E., and Johnson, Harold S.: Effects of Trailing-Edge Modifications on Pitching-Moment Characteristics of Airfoils. NACA CB No. L4130, 1944.