

FED. SUP CLASS  
 5310

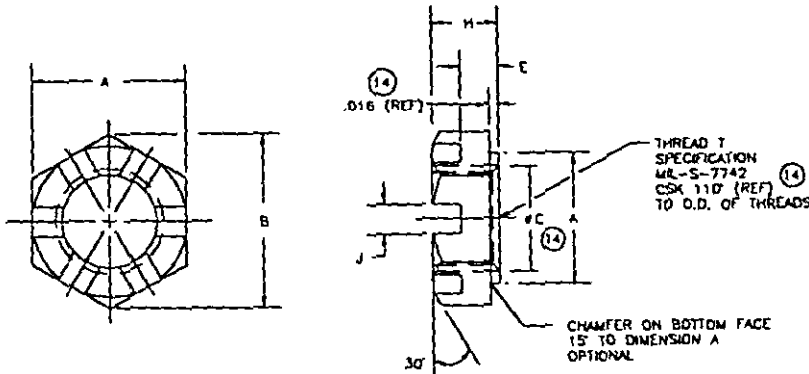


TABLE I. DIMENSIONS AND TENSILE STRENGTHS

AN PART NO.	THREAD T	ULTIMATE TENSILE STRENGTH (σ)		A	B (REF)	E ±.015	H	J +.031 - .000
		STEEL	AL ALLOY					
AN320-1	.1360-40UNF-3B	-	-	.513 +.002 - .010	.358	.078	.156	.078
AN320-2	.1640-36UNF-3B	-	-	.344 +.002 - .010	.391	.078	.156	.078
AN320-3	.1900-32UNF-3B	1,105	550	.375 +.002 - .010	.438	.094	.188	.078
AN320-4	.2500-28UNF-3B	2,040	1,015	.438 +.002 - .010	.500	.094	.188	.078
AN320-5	.3125-24UNF-3B	3,250	1,610	.500 +.002 - .010	.578	.094	.188	.078
AN320-6	.3750-20UNF-3B	5,050	2,510	.563 +.002 - .010	.656	.109	.219	.078
AN320-7	.4375-20UNF-3B	6,800	3,375	.625 +.002 - .011	.719	.109	.219	.125
AN320-8	.5000-20UNF-3B	9,250	4,590	.750 +.002 - .012	.875	.141	.250	.125
AN320-9	.5625-18UNF-3B	11,800	5,850	.875 +.002 - .012	1.016	.188	.313	.156
AN320-10	.6250-18UNF-3B	15,050	7,450	1.000 +.002 - .014	1.156	.188	.313	.156
AN320-12	.7500-16UNF-3B	22,000	10,900	1.125 +.002 - .016	1.297	.250	.375	.156
AN320-14	.8750-14UNF-3B	30,000	14,900	1.313 +.002 - .017	1.516	.313	.438	.156
AN320-15	1.0000-12UNF-3B	40,350	20,000	1.500 +.002 - .019	1.734	.375	.500	.156
(14) AN320-16	1.0000-14NF-3B	40,350	20,000	1.500 +.002 - .019	1.734	.375	.500	.156
AN320-18	1.1250-12UNF-3B	50,900	25,250	1.688 +.002 - .021	1.953	.406	.563	.156
AN320-20	1.2500-12UNF-3B	65,100	32,200	1.875 +.002 - .023	2.172	.469	.625	.156

(c) FOR ALUMINUM-ALLOY NUTS LARGER THAN -5 SIZE, TOLERANCES ON DIMENSION "A" MAY CONFORM TO APPLICABLE MATERIAL SPECIFICATION FOR BAR AND ROD.

(14) (b) 1-14 NF NOMINAL THREAD SIZE WAS INACTIVATED FOR NEW DESIGN AFTER 27 MARCH 1967 BUT IS STILL PROCURABLE.

**REQUIREMENTS:**

- (14) 1. MATERIAL: STEEL GRADE C, FOR NOMINAL SIZE .4375 AND LARGER, HEAT TREATED TO ROCKWELL C HARDNESS RANGE 24-32, ALUMINUM ALLOY, OR 300 SERIES CORROSION-RESISTANT STEEL, SEE PROCUREMENT SPECIFICATION.
2. FINISH: STEEL-CADMIUM PLATE IN ACCORDANCE WITH QQ-P-416, TYPE II, CLASS 2. ALUMINUM ALLOY- ANODIZE IN ACCORDANCE WITH MIL-A-8625, TYPE II CORROSION RESISTANT STEEL- PASSIVATE IN ACCORDANCE WITH QQ-P-35.
- (14) 3. MARKING: MARKING SHALL BE IN ACCORDANCE WITH SAE AS478-2B1.

**NOTES:**

1. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS: ±.010, ANGLES ± 1'.
2. REMOVE ALL BURRS.
- (14) 3. EXAMPLE OF PART NUMBERS: AN320-7 = NUT, STEEL, .4375-20UNF-3B.  
 AN32007 = NUT, ALUMINUM ALLOY, .4375-20UNF-3B.  
 AN320C7 = NUT, CORROSION-RESISTANT STEEL, .4375-20UNF-3B.
4. ADD "D" IN PLACE OF DASH NUMBER FOR ALUMINUM ALLOY NUTS.  
 ADD "C" IN PLACE OF DASH NUMBER FOR CORROSION-RESISTANT STEEL NUTS.
- (14) 5. NUTS MANUFACTURED TO PREVIOUS REVISIONS 11, 12, AND 13 MAY BE FURNISHED FROM SUPPLIERS STOCK UNTIL 20 AUGUST 1988.
- (14) 6. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS DOCUMENT AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS DOCUMENT SHALL TAKE PRECEDENCE.
- (14) 7. UNLESS OTHERWISE SPECIFIED, ISSUES OF REFERENCED DOCUMENTS ARE THOSE IN EFFECT AT THE TIME OF SOLICITATION.

(14) DENOTES CHANGE(S)

P.A. OLA- 15 CUSTODIANS: ARMY- AV NAVY- AS AIR FORCE- 99	AIR FORCE - NAVY AERONAUTICAL STANDARD PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.	<b>AN320</b>
	NUT, PLAIN, CASTELLATED, SHEAR	
PROCUREMENT SPECIFICATION FF-N-836	SUPERSEDES: FORMER USAF AND NAVY STANDARD ISSUE OF AN320	SHEET 1 OF 1

REVERSE SYMBOLS:  
 ARMY- AR  
 AIR FORCE- 82

NOTICE: When Government drawings, specifications or other data are used for any purpose other than in connection with a definite and approved government procurement, the United States Government and its agencies assume no responsibility for any copyright infringement or for any other data that may be reproduced, transmitted, or in any way disclosed, in whole or in part, or for any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

DISTRIBUTION STATEMENT: APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS LIMITED.  
 NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all antecedent standard drawings for this same product and shall become effective for the procurement of aeronautical supplies, or for use in new design, not later than 6 months after the latest date of approval shown.  
 AMSC R/A, Project No. 5310-2043

APPROVED 3 AUG 43 REVISED (10) 29 DEC 72 (11) 25 FEB 91 (12) 06 AUG 92 (13) 27 SEP 94 (14) 20 AUG 96